


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
G	14	P	LTR	DESCRIPTION	DATE	OWN	APVD
		F1		REVISED PER ECO-15-006978	08JUN2015	NK	MM

TE PART NUMBER	PACKAGE TYPE	QTY	
8-35185-3	LOOSE PIECE, BOX	25	OBSOLETE
8-35185-5	LOOSE PIECE, BAG	10	

AMP WIRE RANGE	E13288 Listed
2 AWG SOLID OR STRANDED	2 AWG STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
2 AWG SOLID OR STRANDED	NOT APPLICABLE

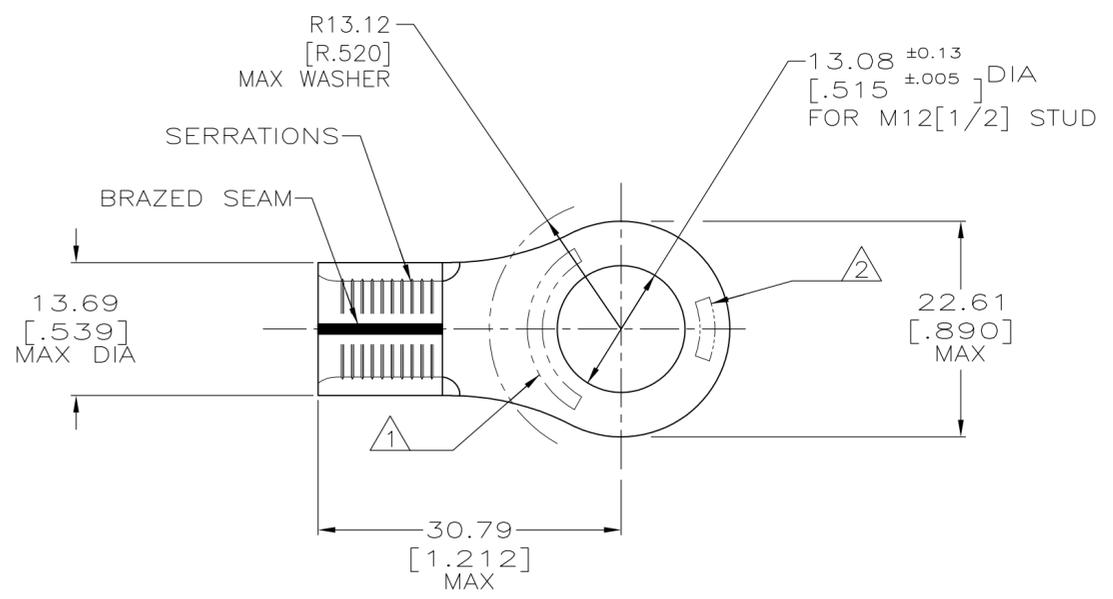

- ① STAMP AMP 2W* APPROX AS SHOWN.
- ② STAMP 60-75 APPROX AS SHOWN.

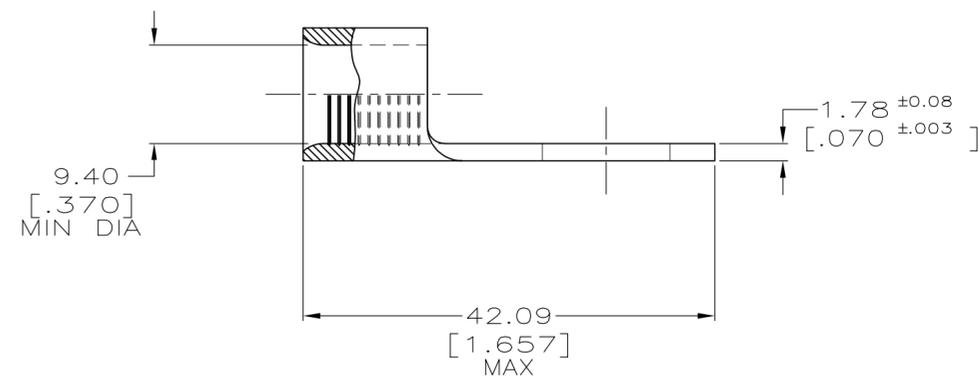

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170°C[338°F] MAX
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 26.7-42.4mm ² [52,600-83,700] CIR MILS SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	

②	35185
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM 5/18/93	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK RD HEIM 1/27/94	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD RE ROSER 1/27/94	TERMINAL, RING TONGUE, SOLISTRAND™	
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	SIZE	CAGE CODE
2 PLC ± 0.20[.008]	3 PLC ± -	APPLICATION SPEC	A2	00779
4 PLC ± -	ANGLES ± ± -	WEIGHT	DRAWING NO	RESTRICTED TO
MATERIAL COPPER ASTM B-152 ANNEALED	FINISH TIN PLATE 0.00254[.000100] MIN THK PER ASTM B545	CUSTOMER DRAWING	G-35185	-
		SCALE 2:1	SHEET 1 OF 1	REV F1