


390263-1 Product Details

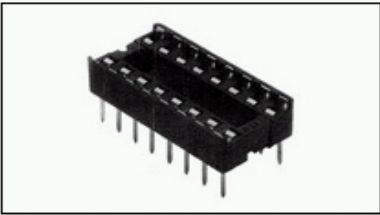

390263-1

DIP Sockets

[Not EU RoHS or ELV Compliant](#) ([Find RoHS Compliant Alternates](#))

Product Highlights:

- Socket Style = Standard
- Through Hole Contact Termination Type
- 2.54 mm Centerline
- Row-to-Row Spacing = 15.24 mm
- 28 Positions

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

TE Internal Number: 390263-1



Superseded



[Add to My Part List](#)



[Request Sample](#)



[Find Similar Products](#)



[Buy Product](#)

[Search for Replacement Parts](#)

Documentation & Additional Information	
<div>Product Drawings:<ul style="list-style-type: none">• DIP SOCKET, 15.24 CENTERLINE OTC STYLE (PDF, English)</div> <div>Catalog Pages/Data Sheets:<ul style="list-style-type: none">• None Available</div> <div>Product Specifications:<ul style="list-style-type: none">• None Available</div> <div>Application Specifications:<ul style="list-style-type: none">• None Available</div> <div>Instruction Sheets:<ul style="list-style-type: none">• None Available</div> <div>CAD Files:<ul style="list-style-type: none">• None Available</div>	<div>Additional Information:<ul style="list-style-type: none">• Product Line Information</div> <div>Related Products:<ul style="list-style-type: none">• Tooling</div>
List all Documents	

Product Features (Please use the Product Drawing for all design activity)	
<div>Product Type Features:<ul style="list-style-type: none">• Socket Style = Standard• Profile = Over-The-Component• Frame Style = Open• Leg Style = Straight• Color = Black</div> <div>Electrical Characteristics:<ul style="list-style-type: none">• Insulation Resistance (MΩ) = 10,000• Contact Resistance (mΩ) = 30</div> <div>Termination Related Features:<ul style="list-style-type: none">• Termination Post Length (mm [in]) = 3.00 [0.118]</div> <div>Body Related Features:<ul style="list-style-type: none">• Centerline (mm [in]) = 2.54 [0.100]• Row-to-Row Spacing (mm [in]) = 15.24 [0.600]• Number of Positions = 28• Mount Style = Vertical</div> <div>Contact Related Features:<ul style="list-style-type: none">• Contact Termination Type = Through Hole• Contact Base Material = Phosphor Bronze• Contact Plating, Mating Area, Material = Tin-Lead• Contact Style = Stamped + Formed• Mating Contact Type = Dual Leaf</div>	<div>Housing Related Features:<ul style="list-style-type: none">• Housing Material = Thermoplastic - GF</div> <div>Configuration Related Features:<ul style="list-style-type: none">• Height Above PC Board (mm [in]) = 5.10 [0.200]</div> <div>Industry Standards:<ul style="list-style-type: none">• RoHS/ELV Compliance = Not ELV/RoHS compliant• Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C</div> <div>Conditions for Usage:<ul style="list-style-type: none">• Temperature Range (°C) = -40 - +105</div> <div>Packaging Related Features:<ul style="list-style-type: none">• Packaging Method = Tube</div> <div>Other:<ul style="list-style-type: none">• Brand = AMP</div>

 BOOKMARK   