

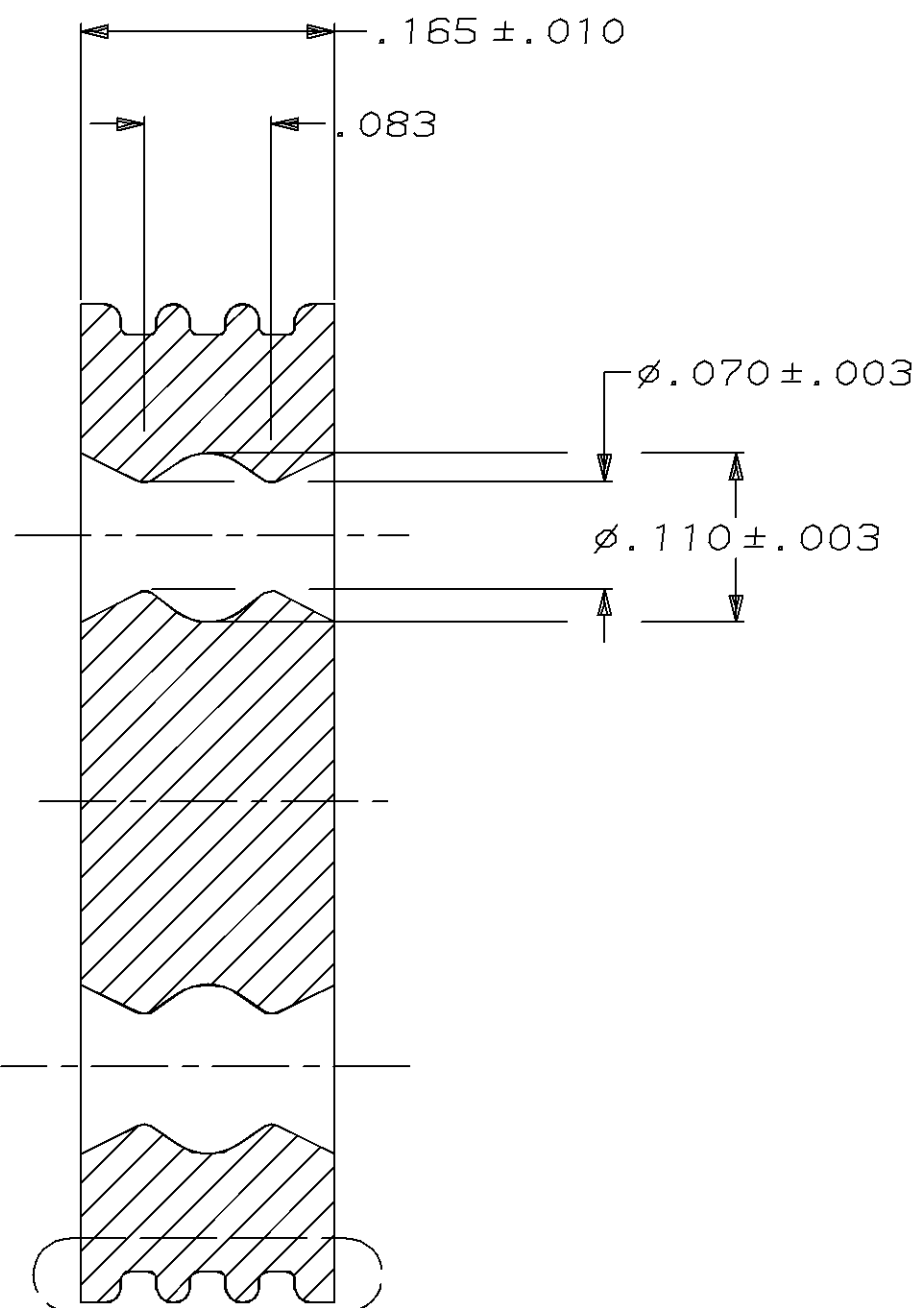


⚠ MATERIAL: 45±5 SHORE "A" DUROMETER SILICONE,GRAY,
SELF LUBRICATING,PER AMP SPEC. 100-1167-3.

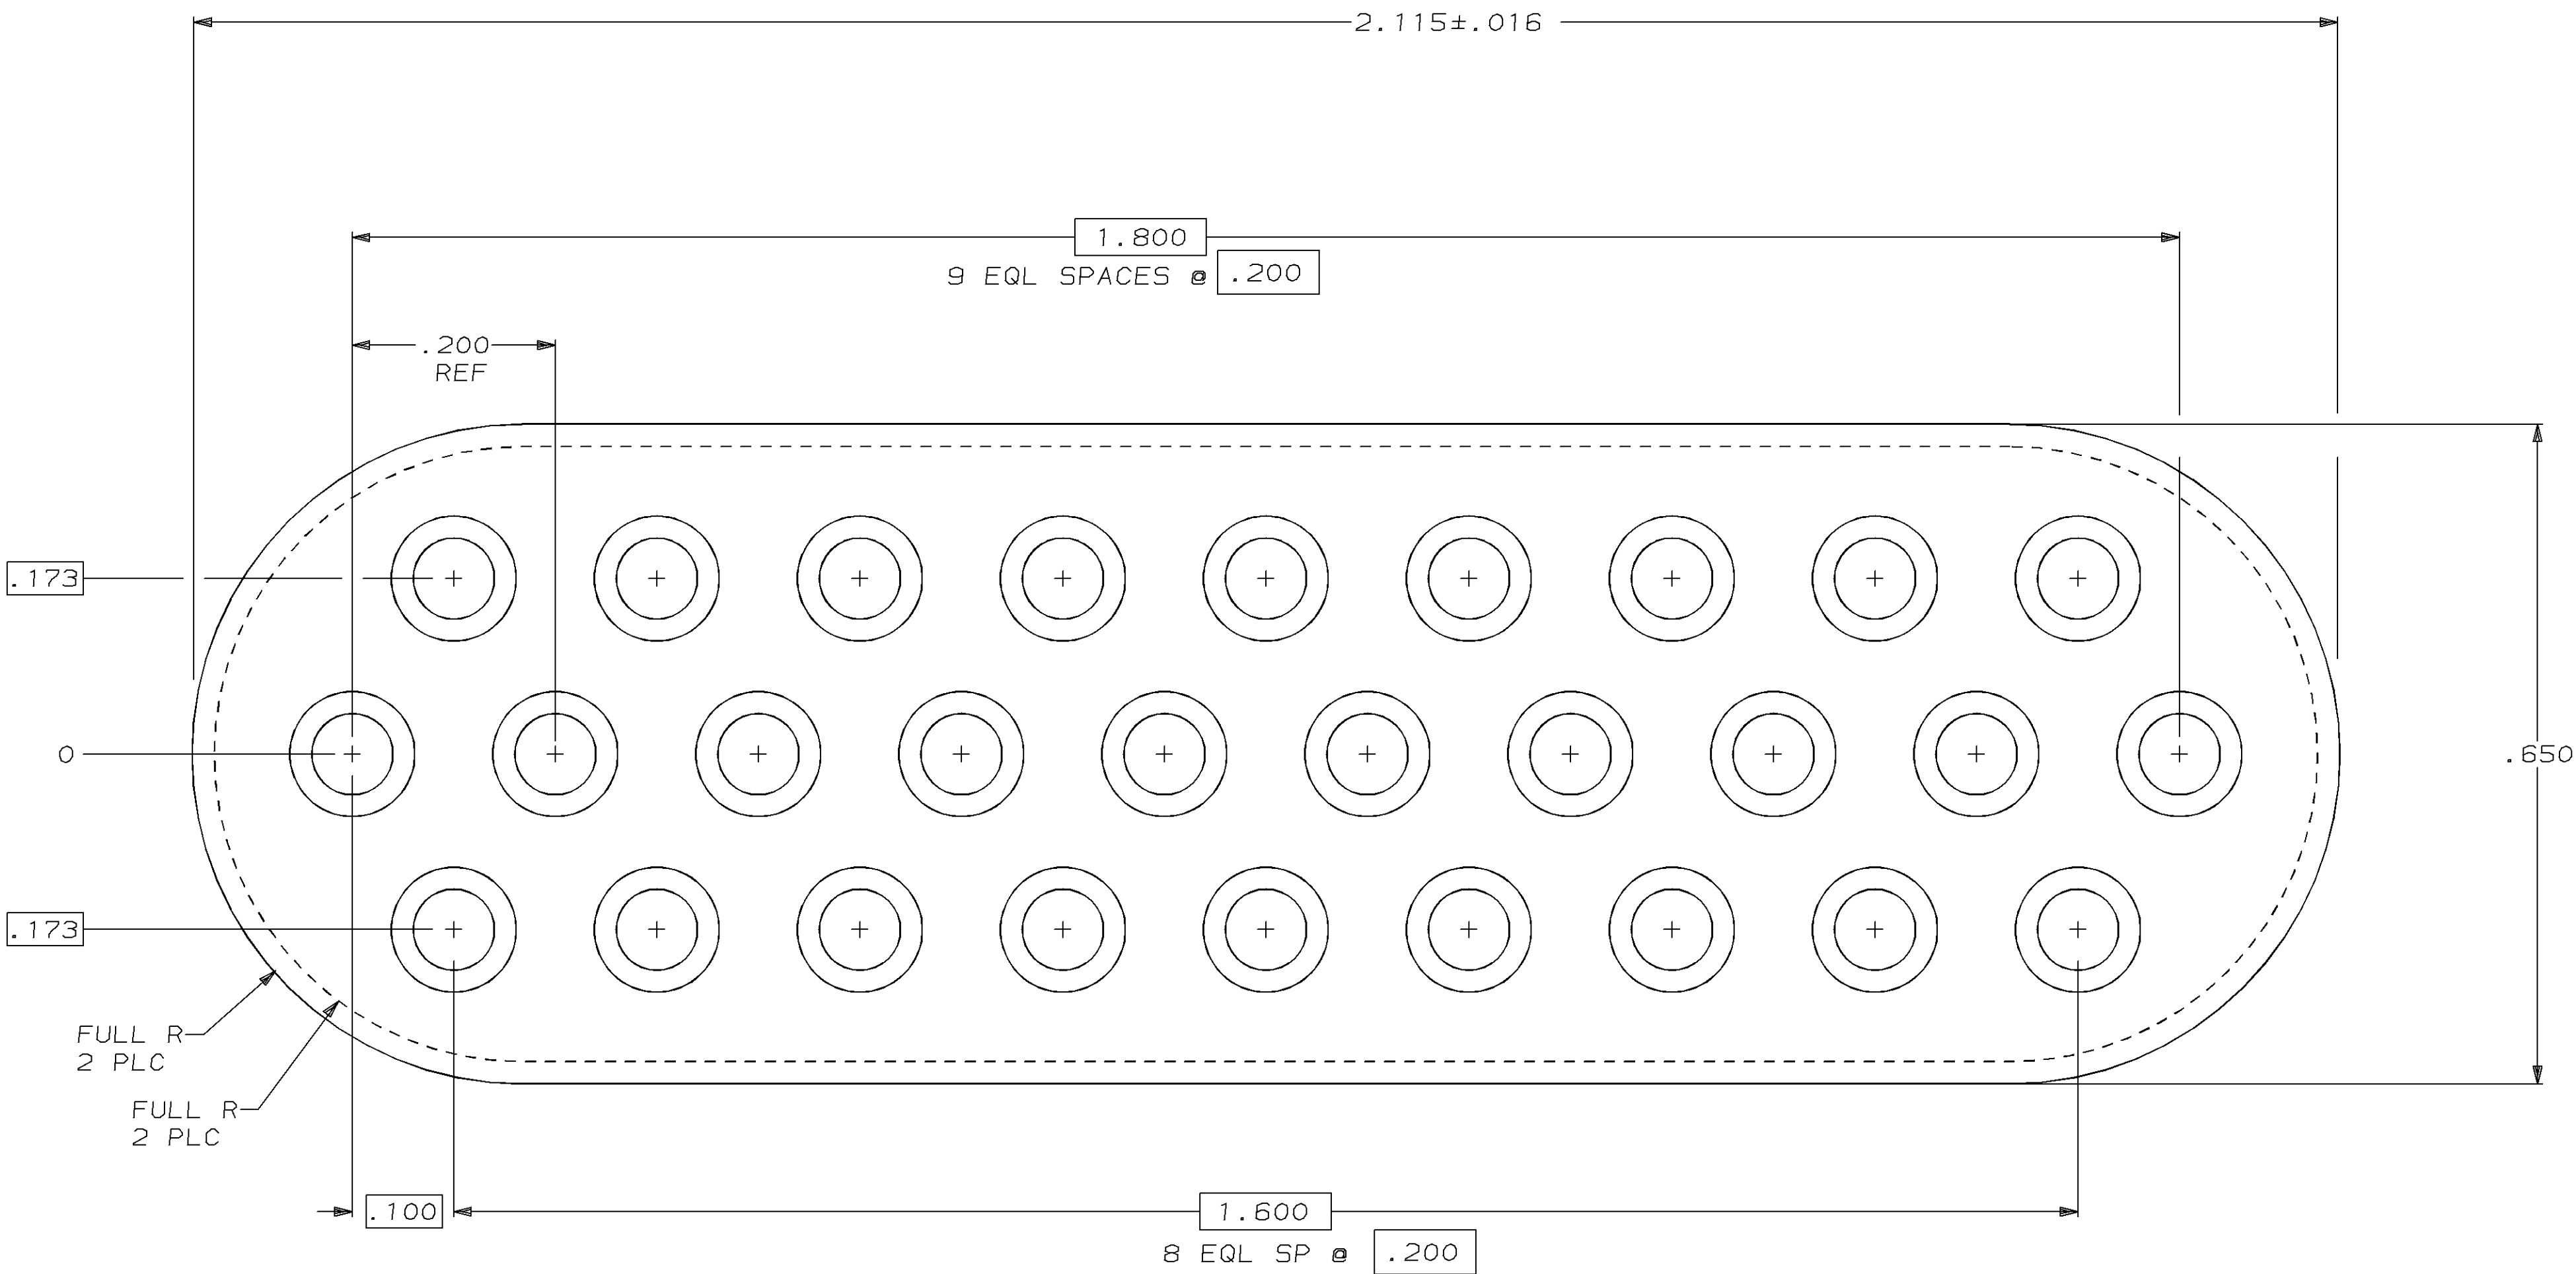

.110	2.79	2.115	53.72
.100	2.54	1.800	45.72
.083	2.11	1.600	40.64
.070	1.78	.650	16.51
.016	0.41	.200	5.08
.010	0.25	.173	4.39
.003	0.08	.165	4.19
IN	MM	IN	MM
CONVERSION TABLE			

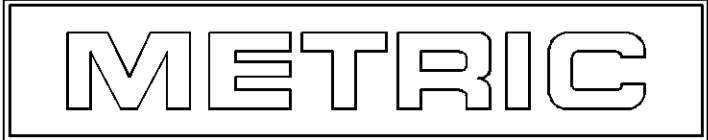

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHALL BE CONTACTED FOR THE LATEST EDITION.		DATE 9-11-95 BY B. LEWIS CHK R. SWING APVD G. INHOFFER	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: Ø PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±0°30'		NAME PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING
MATERIAL ⚠		SCALE 8:1		SIZE A1
DRAWING NO C-776176		CAGE CODE 00779		DRAWING NO C-776176
SHEET 1		OF 1		REV A