


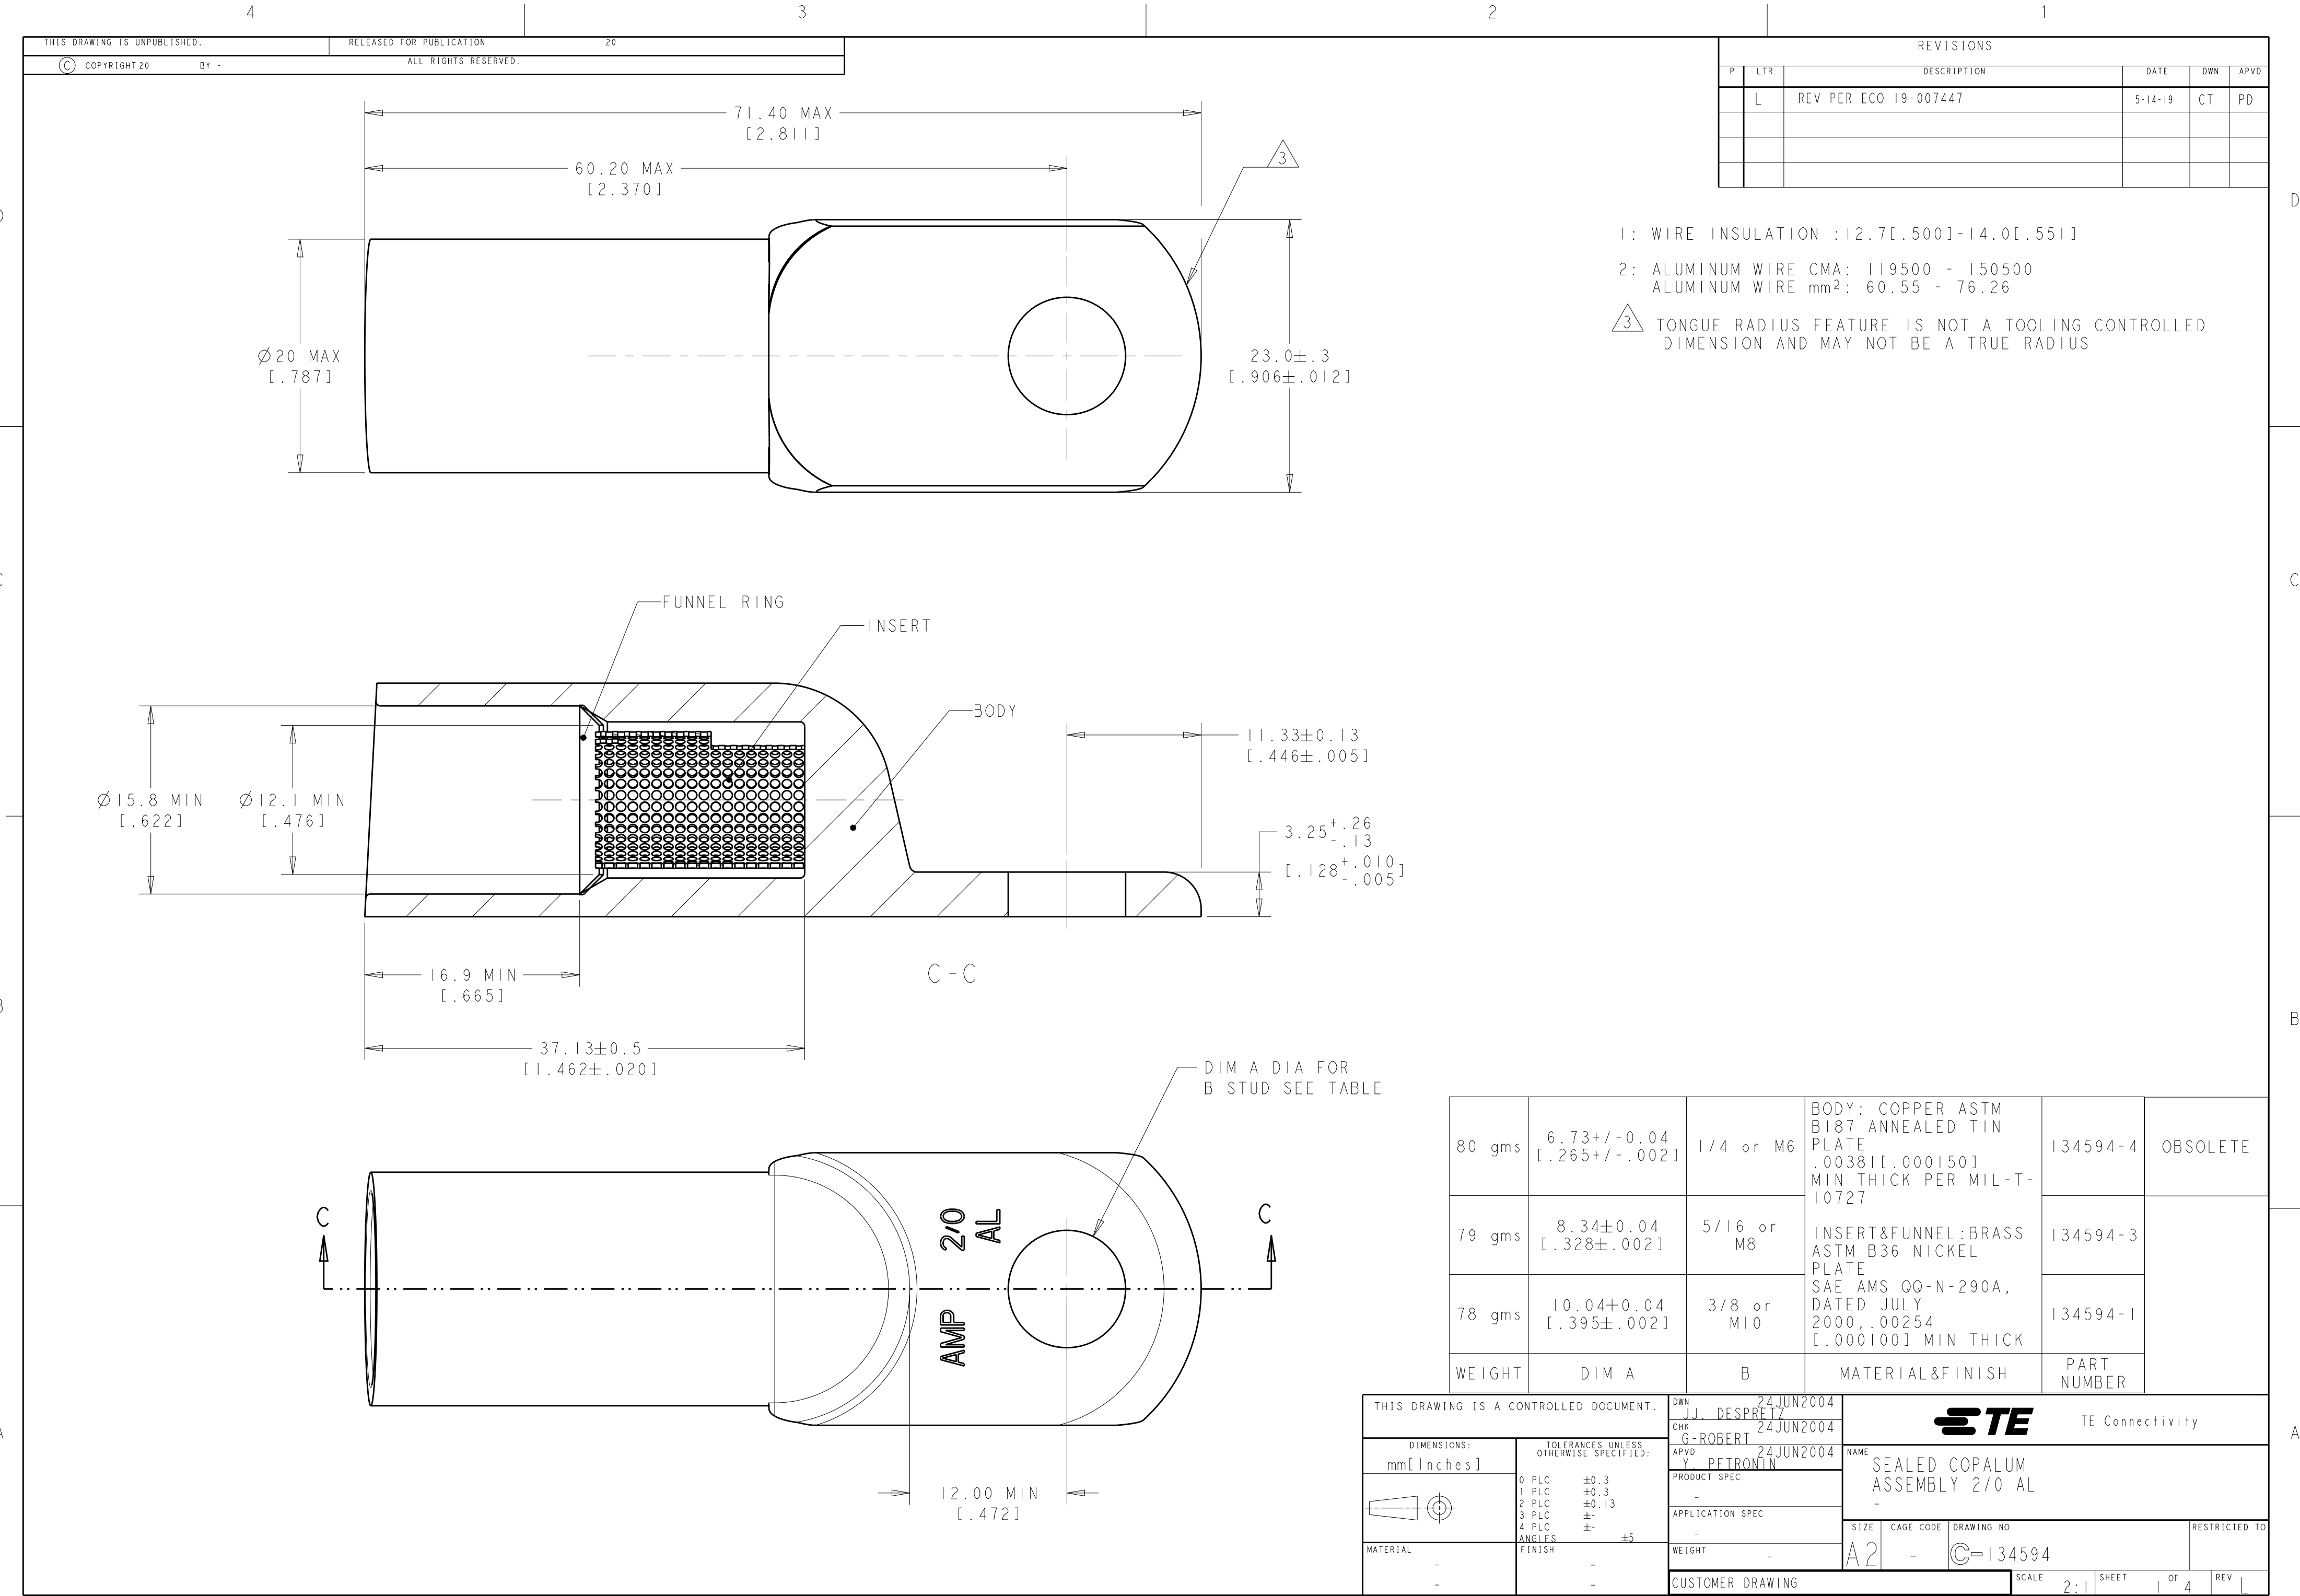


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	L	REV PER ECO 19-007447	5-14-19	CT	PD

1: WIRE INSULATION : 12.7[.500]-14.0[.551]
2: ALUMINUM WIRE CMA: 119500 - 150500
ALUMINUM WIRE mm²: 60.55 - 76.26
3 TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS

80 gms	6.73+/-0.04 [.265+/- .002]	1/4 or M6	BODY: COPPER ASTM B187 ANNEALED TIN PLATE .00381[.000150] MIN THICK PER MIL-T-10727	134594-4	OBSOLETE
79 gms	8.34±0.04 [.328±.002]	5/16 or M8	INSERT&FUNNEL:BRASS ASTM B36 NICKEL PLATE SAE AMS QQ-N-290A, DATED JULY 2000,.00254 [.000100] MIN THICK	134594-3	
78 gms	10.04±0.04 [.395±.002]	3/8 or M10		134594-1	
WEIGHT	DIM A	B	MATERIAL&FINISH	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 24JUN2004 JJ. DESPRETZ	 TE Connectivity		
DIMENSIONS: mm[Inches]		CHK 24JUN2004 G-ROBERT			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 24JUN2004 Y. PETRONIN	NAME SEALED COPALUM ASSEMBLY 2/0 AL		
0 PLC ±0.3 1 PLC ±0.3 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ±5		PRODUCT SPEC -	SIZE A2		
MATERIAL -		APPLICATION SPEC -	CAGE CODE -		
		WEIGHT -	DRAWING NO 134594		
		CUSTOMER DRAWING	RESTRICTED TO		
			SCALE 2:1 SHEET 4 OF 4 REV L		

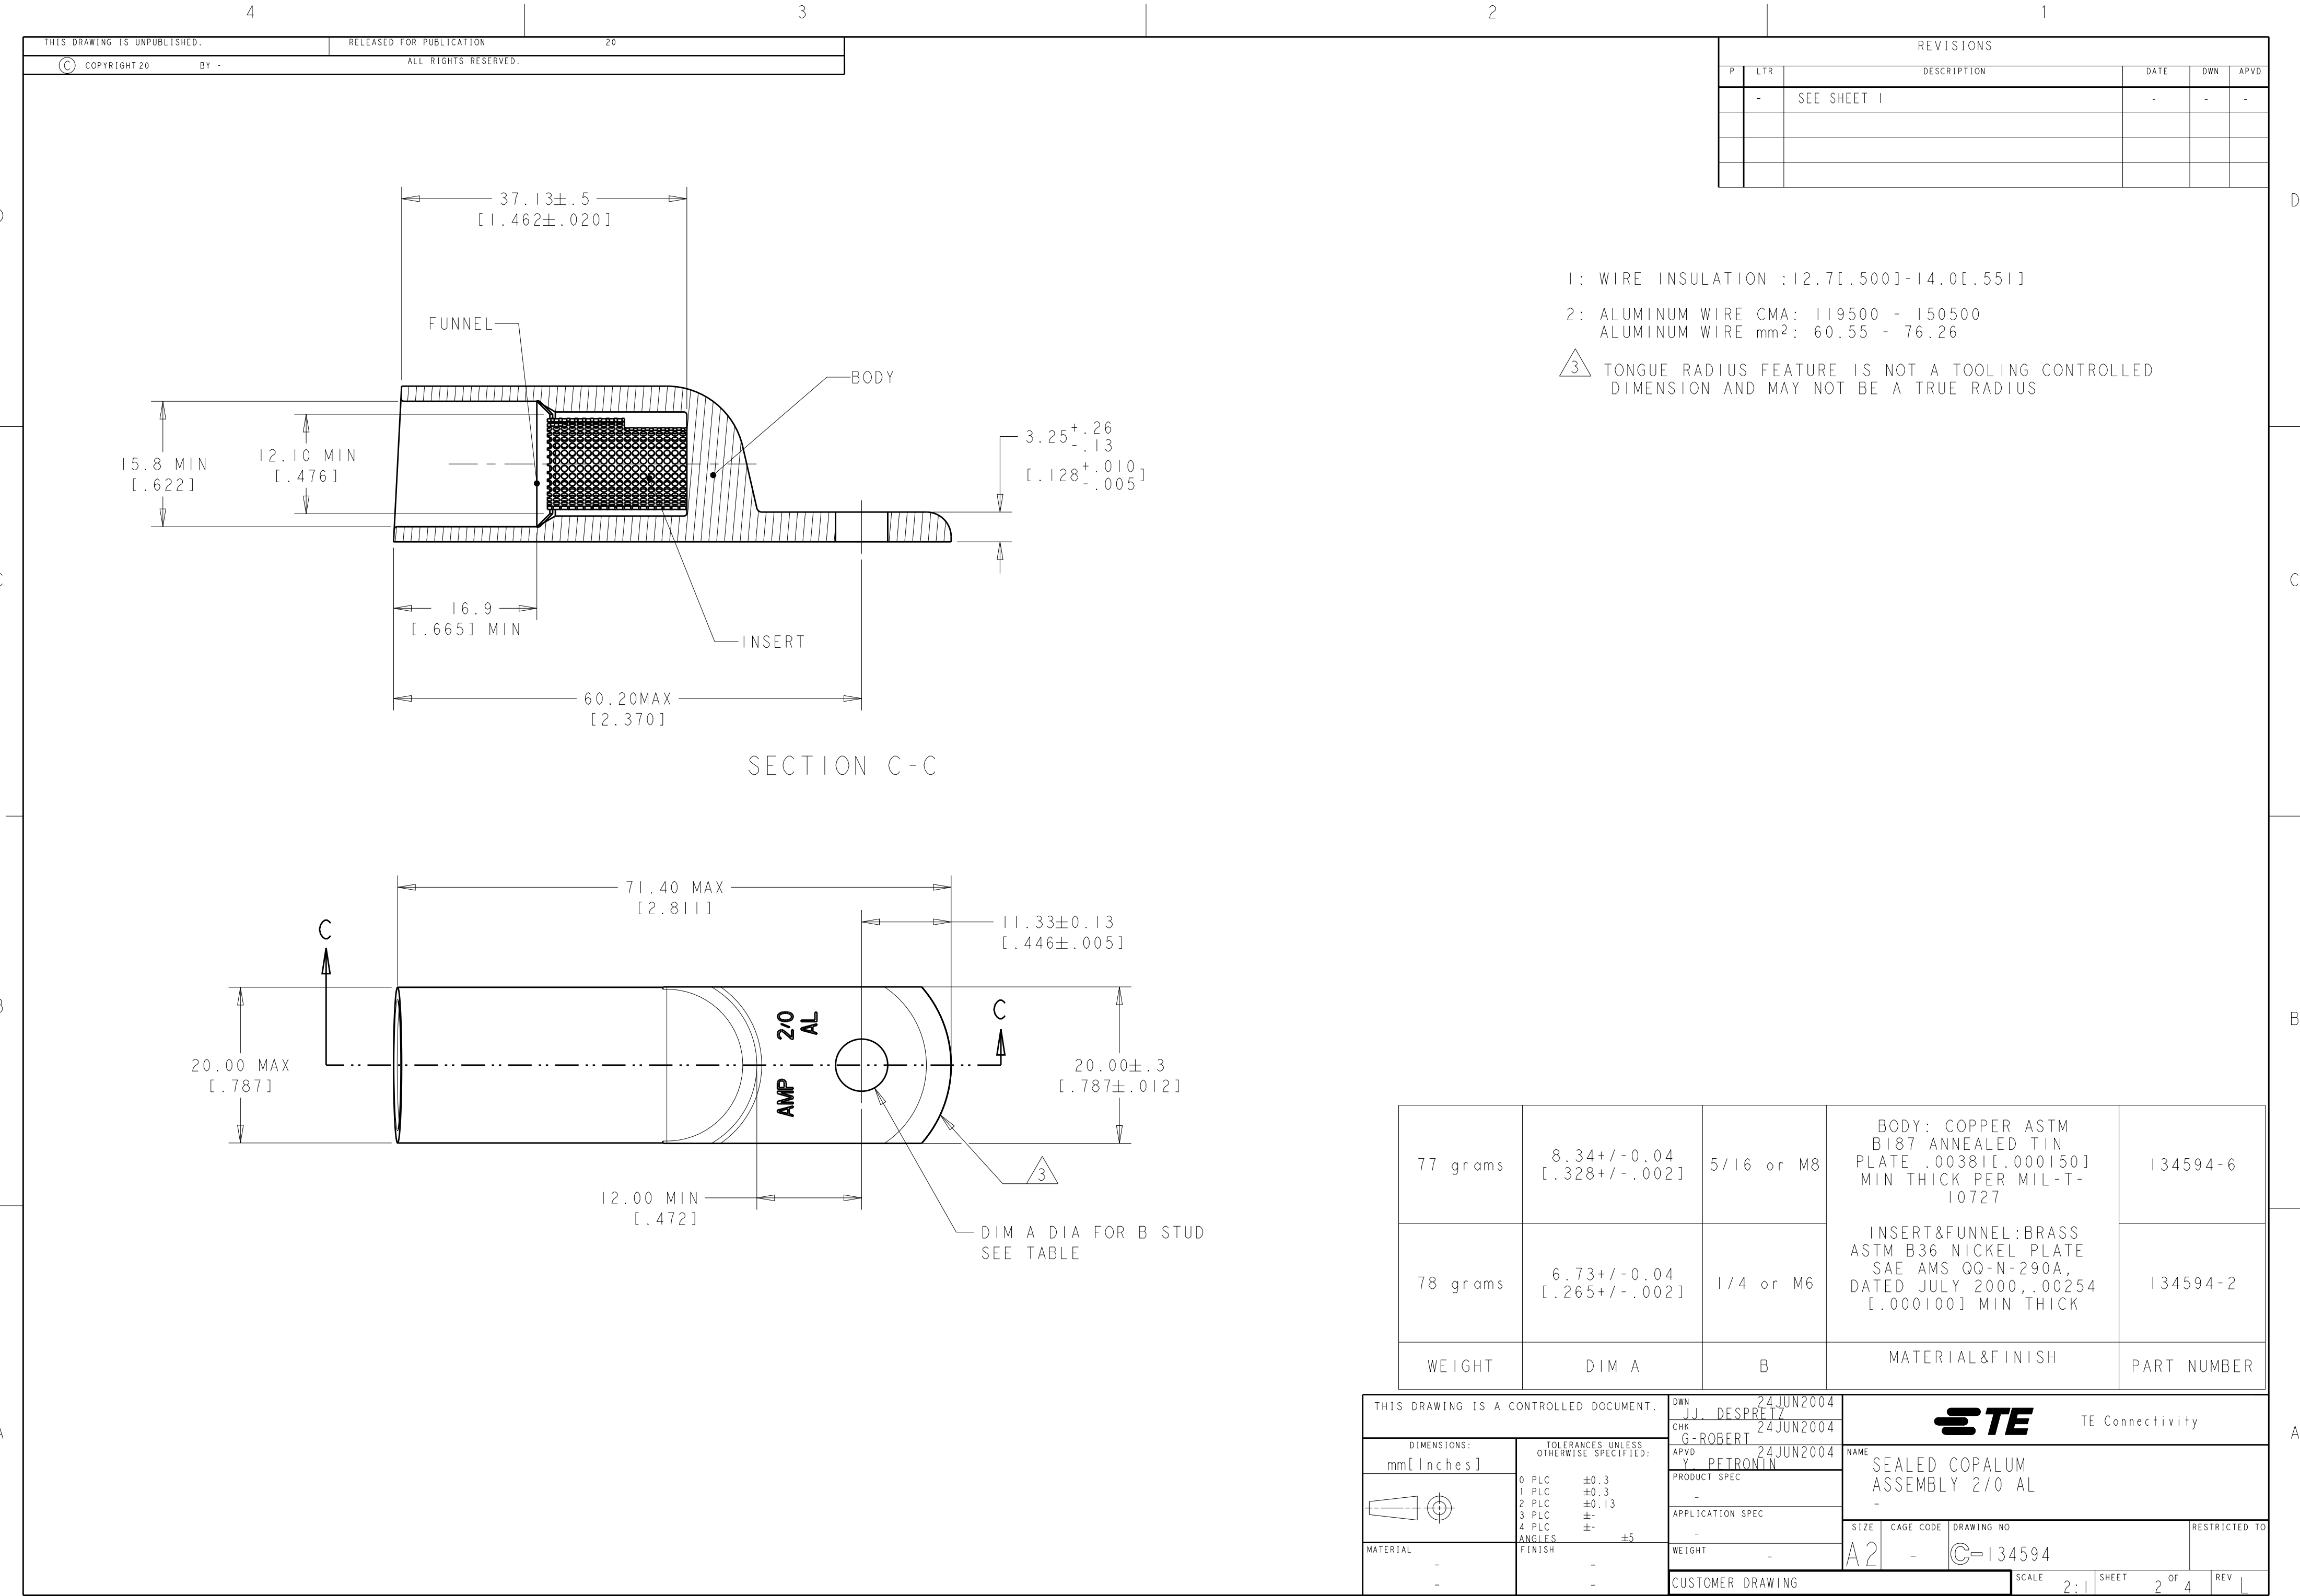

D

D

C

C

B

B

A

A

