

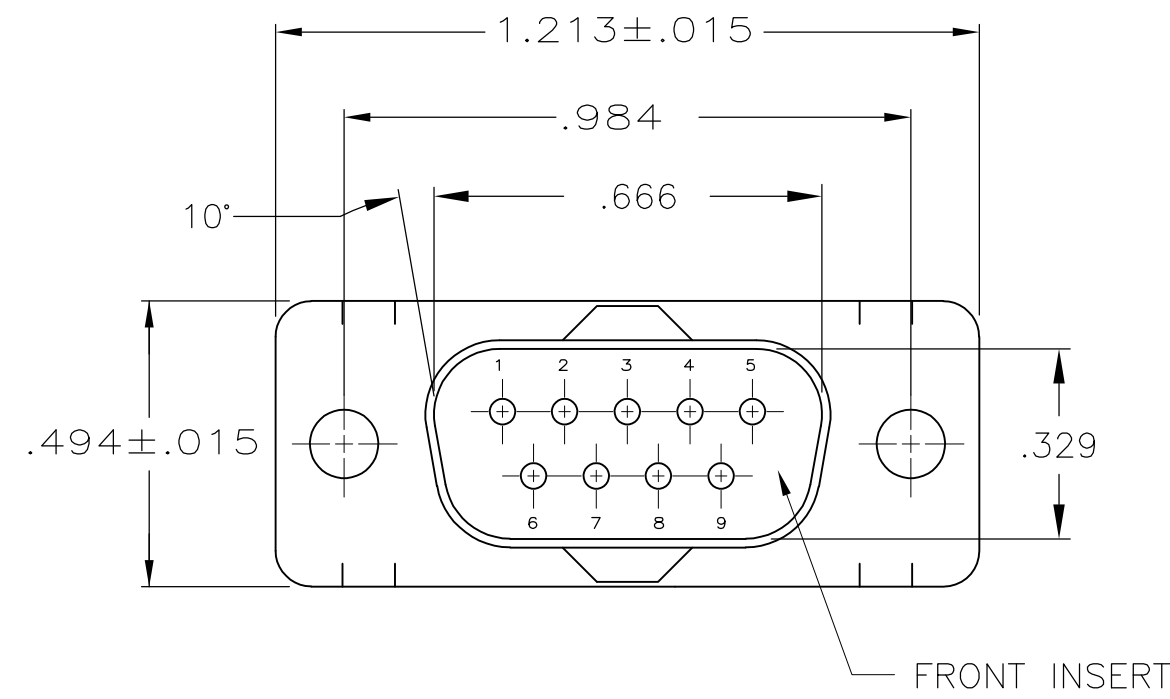


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		A	REVISED PER ECO-14-011808	11AUG2014	AP	SB

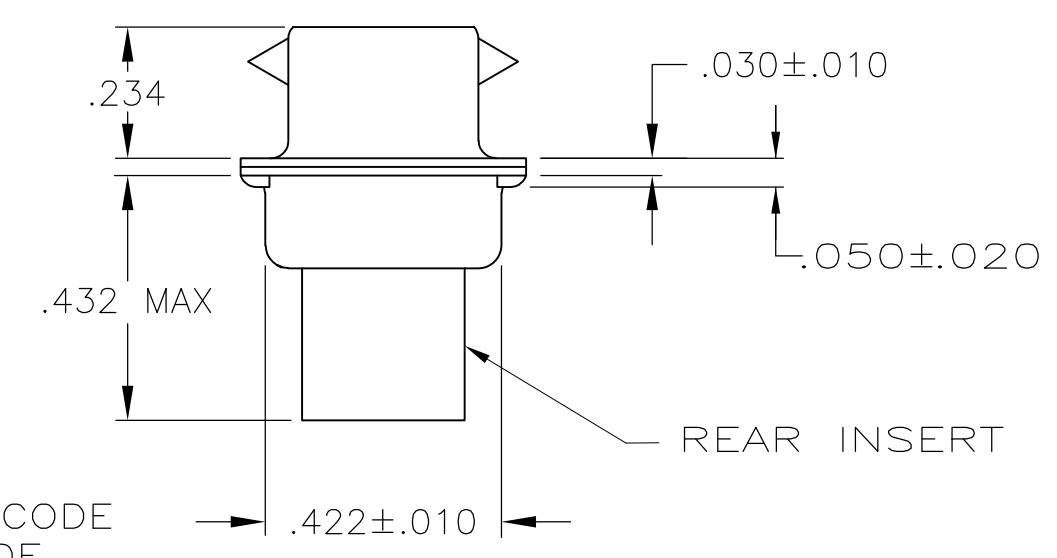

- 1
- CONNECTOR ACCEPTS SIZE 20 DF PIN CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- 2
- INSERTS: GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK. SHELLS: CARBON STEEL.
- 3
- SHELLS: ZINC PLATED .000200-.000400 THICK, YELLOW CHROMATE COATING.
- 4
- MAXIMUM WIRE INSULATION RECOMMENDED FOR USE WITH THIS PLUG IS .068 DIA MAX.

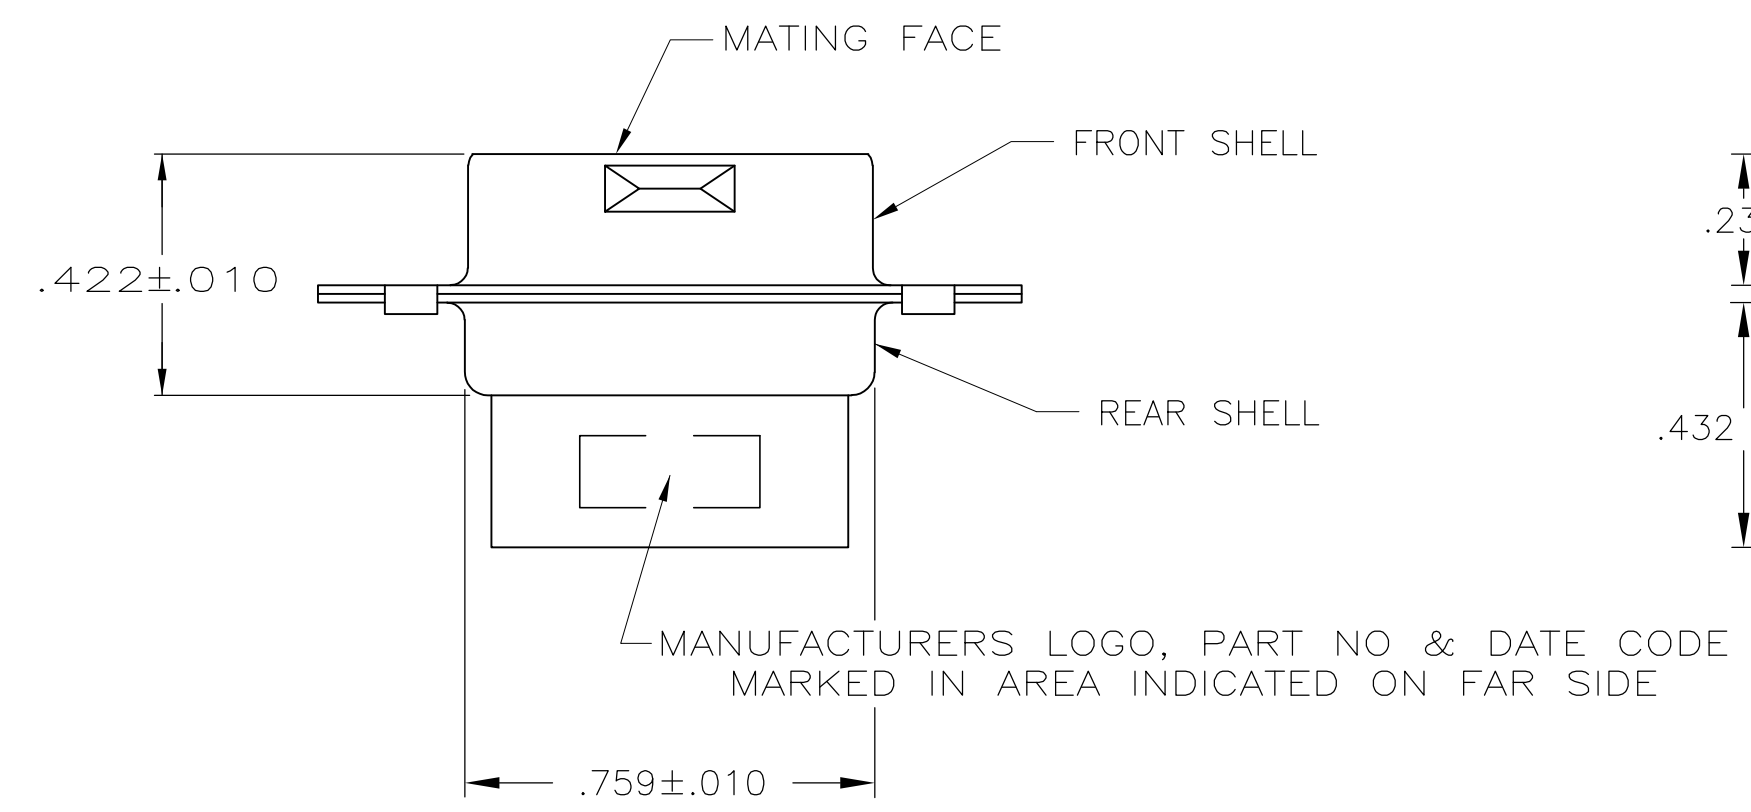

5745018-1

PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J.GERACE	FEB2206	TE Connectivity		
		CHK	C.ROHDE	22FEB06			
		APVD	M.WALMSLEY	22FEB06	NAME		
		PRODUCT SPEC			PLUG CONNECTOR, SIZE 1, 9 POS, AMPLIMITE HDP		
		APPLICATION SPEC			-		
		WEIGHT			SIZE	CAGE CODE	DRAWING NO
		-			A2	00779	C=5745018
		CUSTOMER DRAWING			SCALE	4:1	SHEET 1 of 1
					REV A		