

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
HB	-		F1	ADD NEW PN ECO-19-017316	13-Nov-19	WQ.Y K.T




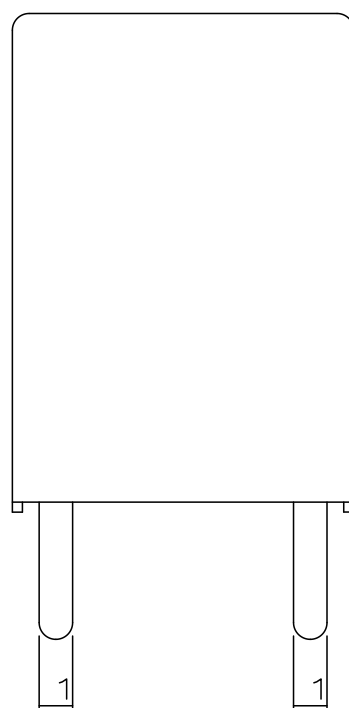


Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

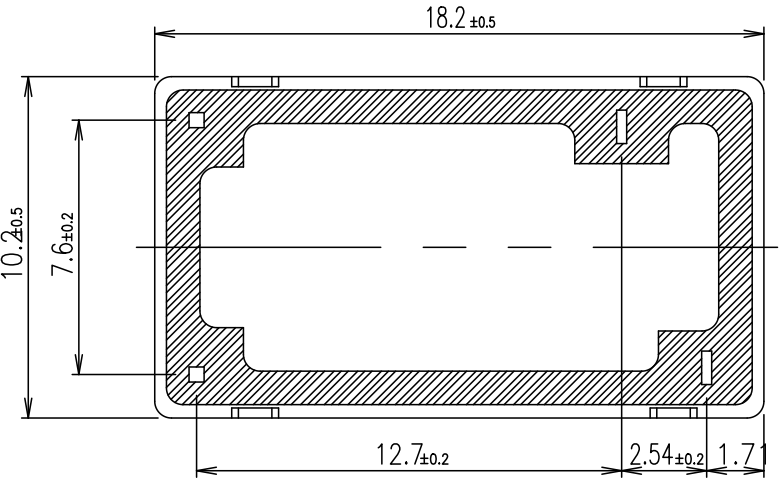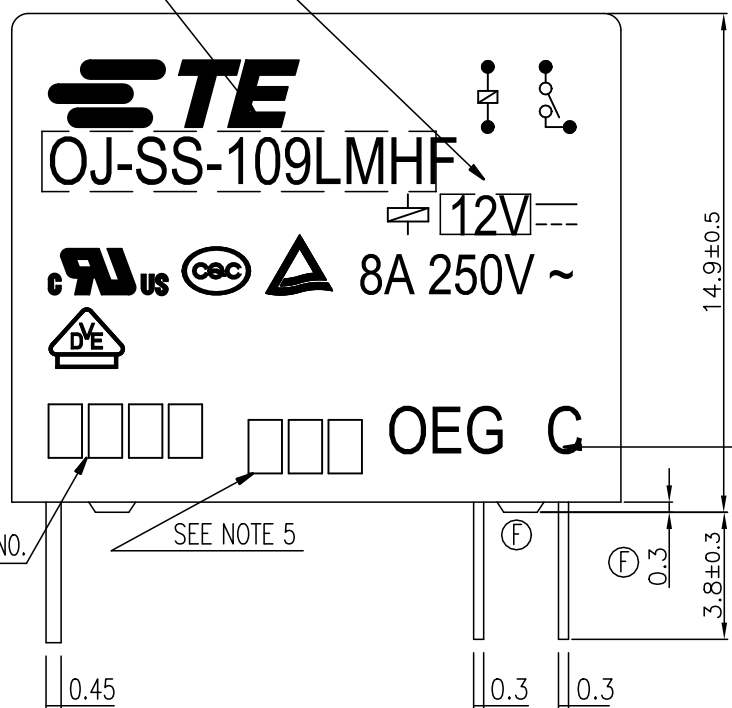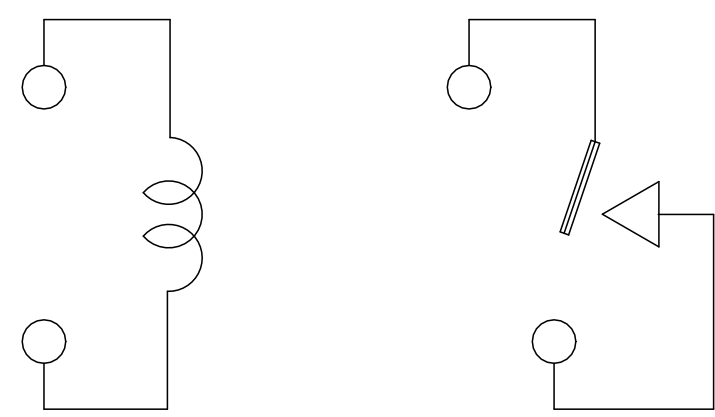

CONNECTION FIGURE

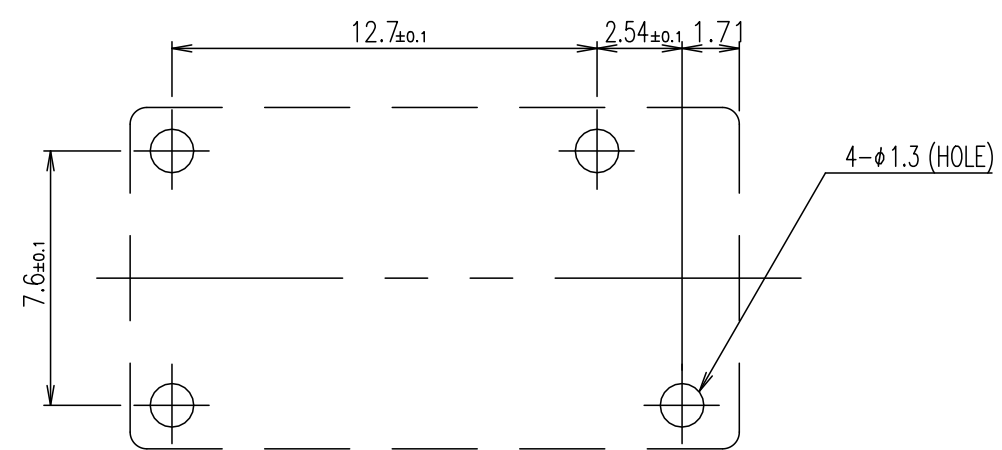


FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING (BOTTOM VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.SASAKI	TE Connectivity	
		CHK N.FUNAYAMA		
DIMENSIONS: mm		APVD A.NAGAI	NAME	
		PRODUCT SPEC	OJ-LMH STANDARD CUSTOMER DRAWING	
		APPLICATION SPEC		
MATERIAL	FINISH	WEIGHT	SIZE A3	CAGE CODE 00779
		DRAWING NO 1721083		RESTRICTED TO
CUSTOMER DRAWING			SCALE 5:1	SHEET 1 OF 2
			REV F1	


LOC	DIST	REVISIONS				
HB	—	P	LTR	DESCRIPTION	DATE	APVD
		—	—	SEE SHEET 1	—	—

F1	ACTIVE	1721083-7	OJ-SS-112LMHF, 000T0	12V	OJ-SS-112LMHF	h
	OBSOLETE	1721083-6	OJ-SS-118LMHF, 000	18V	OJ-SS-118LMHF	g
	ACTIVE	1721083-5	OJ-SS-109LMHF, 000	9V	OJ-SS-109LMHF	f
	OBSOLETE	1721083-4	OJ-SS-106LMHF, 000	6V	OJ-SS-106LMHF	e
	OBSOLETE	1721083-3	OJ-SS-105LMHF, 000	5V	OJ-SS-105LMHF	d
	OBSOLETE	1721083-2	OJ-SS-103LMHF, 000	3V	OJ-SS-103LMHF	c
	ACTIVE	1721083-1	OJ-SS-112LMHF, 000	12V	OJ-SS-112LMHF	b
	ACTIVE	1461014-2	OJ-SS-124LMHF, 000	24V	OJ-SS-124LMHF	a
	PART STATUS	TE PART NO	DESCRIPTION	PART B	PART A	TYPE


RELAY TYPE

NOTES:

1.LOT NO. SYSTEM AS FOLLOWING:



5.ADD LOT NO. SYSTEM AS FOLLOWING;



I, DIGITS FOR DAY OF THE WEEK

1...MONDAY IN THIS WEEK;

2...TUESDAY IN THIS WEEK;

.....

7...SUNDAY IN THIS WEEK

II, DIGITS FOR SHIFT OF THE DAY

1...DAY SHIFT IN THIS DAY;

2...NIGHT SHIFT IN THIS DAY;

III, ONE CHARACTER DISTINGUISH THE LINE IDENTITY,
SUCH AS: A,B.....Z

2.TERMINAL DIMENSION IS BEFORE SOLDER DIP;

3.FOR THE TIN-PLATING OF THE PINS:

+0.1mm FOR WIDTH,THICKENSS AND DIAMETER.

+0.5mm FOR LENGTH.

4.MARKING FROM INK TO LASER AND WELDED CONTACT

		EPOXY RESIN	SEAL (BASE & BOBBIN)	15
		MW79	MAGNETIC WIRE	14
94V-0		P.B.T	CASE	13
94V-0		P.B.T	BASE	12
94VHB		NYRON	BOBBIN	11
	SOLDER DIP	C.P WIRE	COIL TERMINAL	10
94V-0		P.P.S	CARD	9
		Ag ALLOY	MOVABLE CONTACT	8
		Ag ALLOY	NO.CONTACT	7
		STEEL	HINGE SPRING	6
	SOLDER DIP	Cu ALLOY	NO.TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
	NIP	STEEL	CORE	3
	NIP	STEEL	ARMATURE	2
	NIP	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

—

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± —

1 PLC ± —

2 PLC ± —

3 PLC ± —

4 PLC ± —

ANGLES ± —

FINISH

—

DWN H.SASAKI —

CHK N.FUNAYAMA —

APVD A.NAGAI —

PRODUCT SPEC —

APPLICATION SPEC —

WEIGHT —

CUSTOMER DRAWING

TE Connectivity

NAME —

OJ-LMH STANDARD CUSTOMER DRAWING

SIZE A3 CAGE CODE 00779 DRAWING NO 1721083 RESTRICTED TO —

SCALE 5:1 SHEET 2 OF 2 REV F1