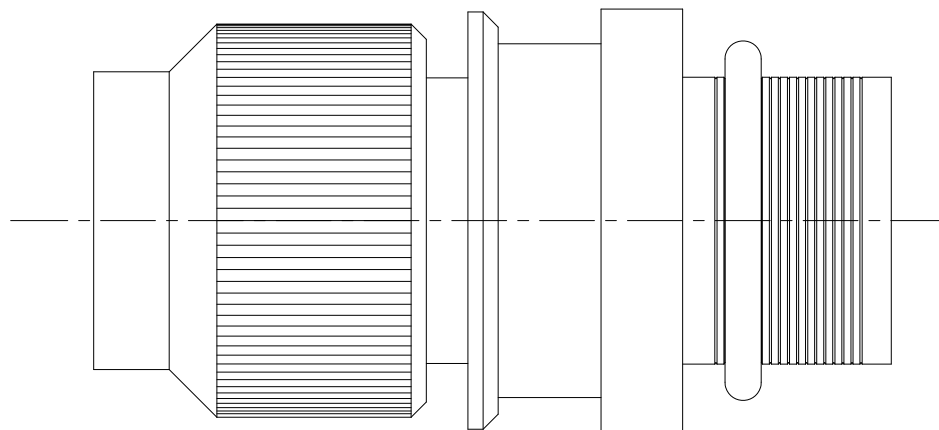


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REVISED PER ECD-09-010154	27APR09	IRT	MP
			C	REVISED PER ECD-09-013835	26JUN09	IRT	MP
			D	REVISED PER ECD-12-021276	05DEC12	DJ	SH


TINEL-LOCK ADAPTERNOTES:-

- THIS PRODUCT IS DESIGNED TO TERMINATE A BRAIDED CABLE SHIELD AND A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR[SEE NOTE 6].
- SEE CH00-0250-008 FOR ORDERING INFORMATION, MODIFICATIONS AND ADDITIONAL DIMENSIONS.
- SEE DRAWING "TR" FOR DETAIL ON TINEL-LOCK RING. RINGS ARE DESIGNED TO BE HEATED ELECTRICALLY. ALL RINGS ARE MARKED WITH THERMOCHROMIC PAINT WHICH CHANGES COLOUR WHEN INSTALLATION TEMPERATURE IS REACHED.
- ADAPTER TO BE PERMANENTLY MARKED WITH CODE IDENTIFICATION NUMBER AND PART NUMBER (E.G:- 06090-TXR88AU00-0605).RINGS SHALL BEAR NO MARKING.
- TINEL LOCK RING IS TO BE SPECIFIED IN PART NUMBER WHILE ORDERING.
- ADAPTOR MATES TO :GLENAIR SERIES 800,801,803,804 & 805 CONNECTORS.
- FOR ALTERNATIVE MATERIAL AND FINISH - CONTACT TYCO ELECTRONICS.

If this document is printed it becomes uncontrolled. Check for the latest revision

RAYCHEM ADAPTERS
CUSTOMER DRAWING

DIMENSIONS:		DWN	28-NOV-12	MATERIAL	—	FINISH	—
INCH[mm]		D JAIN	28-NOV-12	 TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	28-NOV-12				
0 PLC ±-		S HELEN	28-NOV-12	NAME TINEL-LOCK ADAPTER			
1 PLC ±-		APVD	28-NOV-12				
2 PLC ±-		S HELEN		SIZE			
3 PLC ±-		PRODUCT SPEC					
4 PLC ±-		APPLICATION SPEC		CAGE CODE		DRAWING NO	
ANGLES ±-				A4		C=TXR88	
		WEIGHT	—			RESTRICTED TO	
						—	



REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
-	SEE SHEET 1	-	-

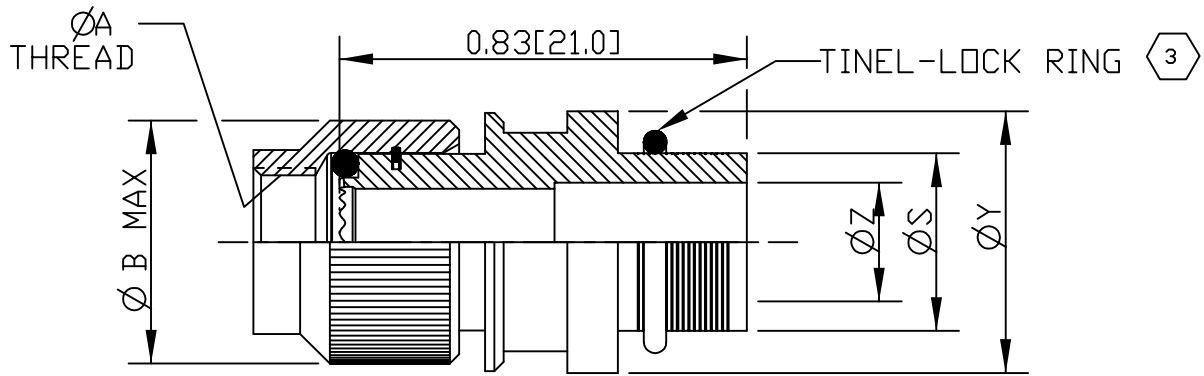


TABLE I

ORDER NUMBER	SHELL SIZES					MAX ENTRY SZ	ØA THD RH CLASS 2B	ØB
	SERIES 800	SERIES 801	SERIES 802	SERIES 803 & 804	SERIES 805			
05	05				-	03	0.250-32 UNEF	0.45 [11.50]
06	06				-	04	0.3125-32 UNEF	0.52 [13.0]
07	07				09	04	0.4375-28 UNEF	0.63 [16.0]
08	-	-	-	-	08	04	0.3750-28 UN	0.63 [16.0]
09	08				10	06	0.500-28 UNEF	0.69 [17.50]
10	09				11	06	0.5625-24 UNEF	0.75 [19.0]
11	10				12	08	0.6250-24 UNEF	0.81 [20.5]
12	12	13	12	12	-	08	0.6875-24 UNEF	0.87 [22.0]
13	-	-	-	-	15	08	0.7500-20 UNEF	0.98 [25.0]
14	-	-	14	-	-	10	0.8750-20 UNEF	1.10 [28.0]
15	--	16-17	15	14-15	18-19	12	0.9375-20 UNEF	1.16 [29.50]

TABLE II

ENTRY SIZE	ØZ +0.010 -0.020 [+0.25] [-0.50]	ØS	ØY ± 0.550 [± 0.38]
03	0.187 [4.75]	0.288[7.32] 0.290[7.39]	0.414 [10.6]
04	0.250 [6.35]	0.376 [9.56] 0.370 [9.39]	0.550 [13.97]
05	0.312 [7.92]	0.438[11.13] 0.432[10.97]	0.612 [15.54]
06	0.375 [9.52]	0.501[12.73] 0.495[12.57]	0.675 [17.14]
07	0.438 [11.12]	0.563[14.31] 0.556[14.12]	0.737 [18.71]
08	0.500 [12.70]	0.626[15.91] 0.619[15.72]	0.800 [20.32]
10	0.625 [15.87]	0.752[19.11] 0.742[18.84]	0.925 [23.50]
12	0.750 [19.05]	0.877[22.28] 0.867[22.02]	1.050 [26.67]

RAYCHEM ADAPTERS
CUSTOMER DRAWING

If this document is printed it becomes uncontrolled. Check for the latest revision

SIZE	CAGE CODE:	DWG. NO.	REV
A	06090	©- TRX88	D
SCALE: 1:1		SHEET 2 OF 2	