


## SPECIFICATION CONTROL DRAWING

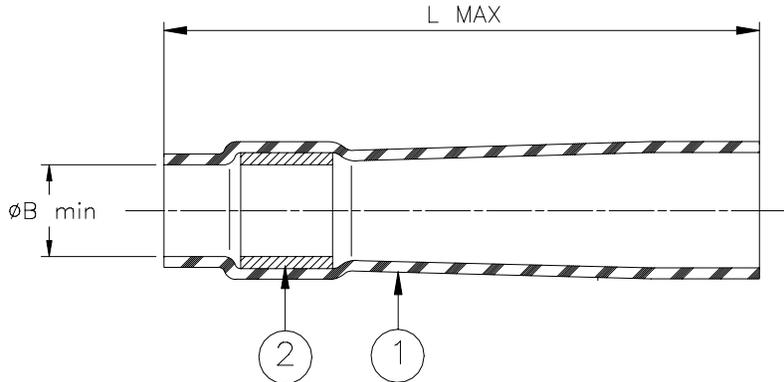

Product Revision		Product Dimensions	
Product Name		øB min	L max
D-110-0091	B	4.3 (0.170)	17.0 (0.670)

### MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
  - SOLDER: TYPE Sn63 per ANSI-J-STD-006.
  - FLUX: TYPE ROL1 per ANSI-J-STD-004.

### APPLICATION

1. This sleeve is designed to terminate the shield of Raychem coax, EPD 5886 to a circular turret assembly.
2. Temperature range: -55°C to +150°C.

\* A trademark of Raychem Corporation.

<b>Raychem</b>		THERMOFIT DEVICES	Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA	TITLE: <b>SOLDERSLEEVE* SHIELD TERMINATOR</b>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO: <b>D-110-0091</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D980917		REPLACES: D1100091	
DRAWN BY: M. FORONDA	DATE: 07/24/98	PROD. REV. SEE TABLE	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.