


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | NOTES |
|----------|-------------|---|------|----------------|
| 1 | TLY-13 | NEMA 5-15P | 1 | black overmold |
| 2 | TLY-18 | C13 | 1 | black overmold |
| 3 | 30-00248 | Wire, 3C, 18 AWG, UL SJT, 300V, 105°C, 7.75 mm, VW-1, PVC | 1 | |

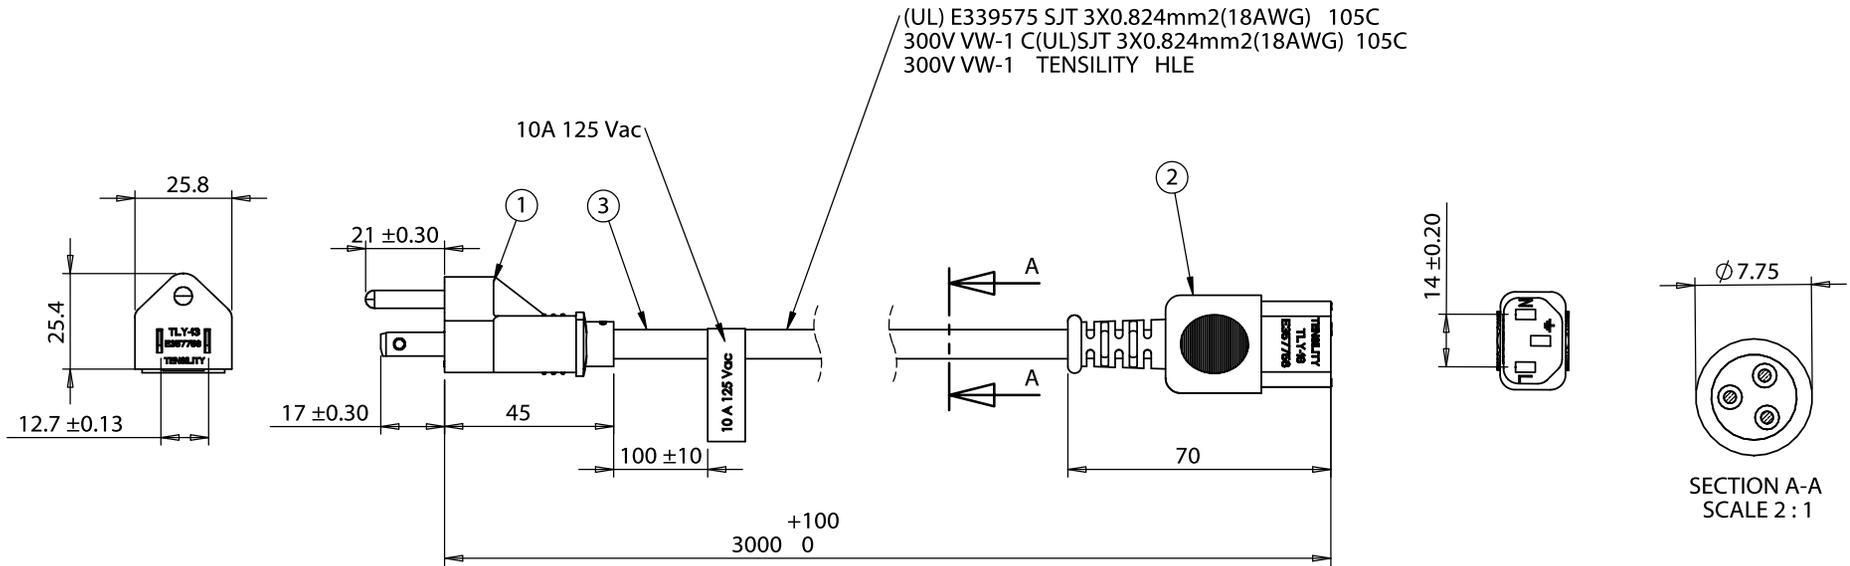

| Revision | Date | Description | Prepared by: | Notes: | <h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p> | | |
|----------|-----------|-----------------|---|---|--|--------------------------------|--------------|
| A | 8/27/2014 | Initial release | AG 2014.08.28 11:17:57 -07'00' | Rated for 10 A at 125 Vac RoHS compliant | | | |
| | | | Verified by: JM 2014.08.29 14:35:38 -07'00' | Function test: no open, no reversed polarity, no short circuit, no INT | SIZE A | Part number 11-00079 | |
| | | | DIMENSIONS ARE IN MILLIMETERS TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Ac cord, 3000 mm, U.S, NEMA 5-15P plug, TLY-13 to C13, TLY-18, 18 AWG, SJT wire, 30-00248 | SCALE: 1:2 | WEIGHT: | SHEET 1 OF 1 |