

ADS7824

www.burr-brown.com/databook/ADS7824.html


4 Channel, 12-Bit Sampling CMOS A/D Converter

FEATURES

- 25 μ s max SAMPLING AND CONVERSION
- SINGLE +5V SUPPLY OPERATION
- PIN-COMPATIBLE WITH 16-BIT ADS7825
- PARALLEL AND SERIAL DATA OUTPUT
- 28-PIN 0.3" PLASTIC DIP AND SOIC
- ± 0.5 LSB max INL AND DNL
- 50mW max POWER DISSIPATION
- 50 μ W POWER DOWN MODE
- ± 10 V INPUT RANGE, FOUR CHANNEL MULTIPLEXER
- CONTINUOUS CONVERSION MODE

DESCRIPTION

The ADS7824 can acquire and convert 12 bits to within ± 0.5 LSB in 25 μ s max while consuming only 50mW max. Laser-trimmed scaling resistors provide the standard industrial ± 10 V input range and channel-to-channel matching of $\pm 0.1\%$. The ADS7824 is a low-power 12-bit sampling A/D with a four channel input multiplexer, S/H, clock, reference, and a parallel/serial microprocessor interface. It can be configured in a continuous conversion mode to sequentially digitize all four channels. The 28-pin ADS7824 is available in a plastic 0.3" DIP and in a SOIC, both fully specified for operation over the industrial -40°C to +85°C range.

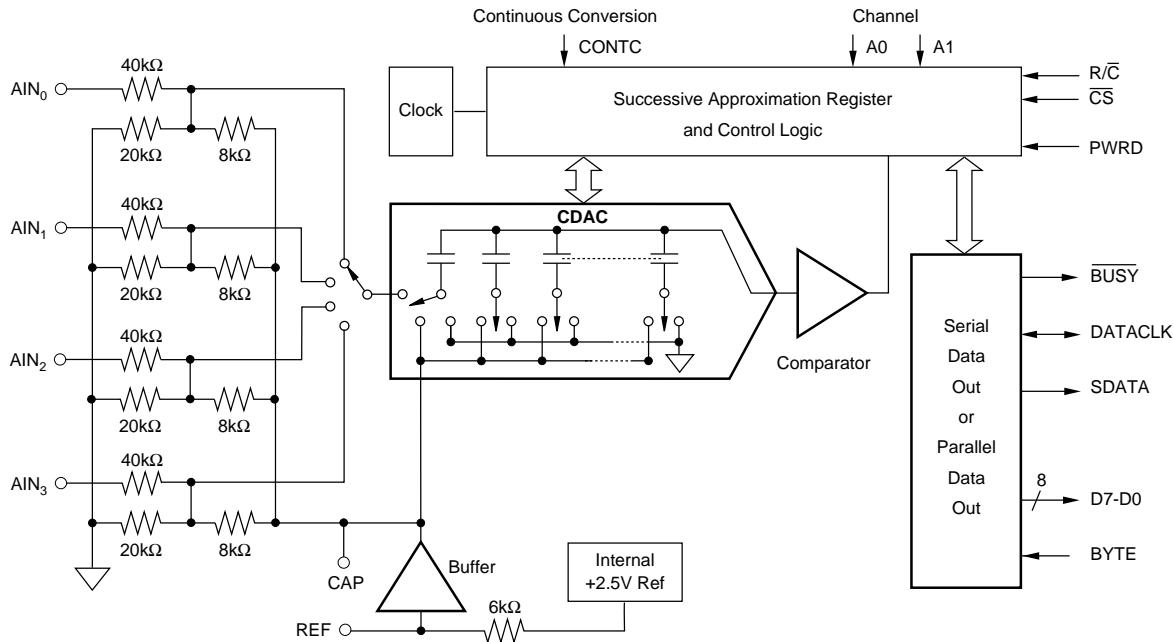

International Airport Industrial Park • Mailing Address: PO Box 11400, Tucson, AZ 85734 • Street Address: 6730 S. Tucson Blvd., Tucson, AZ 85706 • Tel: (520) 746-1111 • Twx: 910-952-1111
Internet: <http://www.burr-brown.com/> • FAXLine: (800) 548-6133 (US/Canada Only) • Cable: BBRCORP • Telex: 066-6491 • FAX: (520) 889-1510 • Immediate Product Info: (800) 548-6133

SPECIFICATIONS

ELECTRICAL

At $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$, $f_S = 40\text{kHz}$, $V_{S1} = V_{S2} = V_S = +5\text{V} \pm 5\%$, using external reference, $\text{CONTC} = 0\text{V}$, unless otherwise specified.

| PARAMETER | CONDITIONS | ADS7824P, U | | | ADS7824PB, UB | | | UNITS |
|--|--|-------------|------------------|-------------------------------|---------------|-----|------------|-----------------------------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | |
| RESOLUTION | | | | 12 | | | $*(^1)$ | Bits |
| ANALOG INPUT | | | | | | | | |
| Voltage Range | Channel On or Off | | $\pm 10\text{V}$ | | | | | V |
| Impedance | | | 45.7 | | | | | $\text{k}\Omega$ |
| Capacitance | | | 35 | | | | | pF |
| THROUGHPUT SPEED | | | | | | | | |
| Conversion Time | Includes Acquisition | | 20 | | | | | μs |
| Acquisition Time | | | 5 | | | | | μs |
| Multiplexer Settling Time | | | 5 | | | | | μs |
| Complete Cycle (Acquire and Convert) | | | | 25 | | | | μs |
| Complete Cycle (Acquire and Convert) | | | | 40 | | | | μs |
| Throughput Rate | | | | | | | | kHz |
| DC ACCURACY | | | | | | | | |
| Integral Linearity Error | Internal Reference | | ± 0.15 | ± 1 | | | ± 0.5 | LSB ⁽²⁾ |
| Differential Linearity Error | Internal Reference | | ± 0.15 | ± 1 | | | ± 0.5 | LSB |
| No Missing Codes | | | Guaranteed | | | | | |
| Transition Noise ⁽³⁾ | | | 0.1 | | | | | |
| Full Scale Error ⁽⁴⁾ | | | | ± 0.5 | | | ± 0.25 | LSB |
| Full Scale Error Drift | | | ± 7 | ± 0.5 | | | ± 0.25 | $\%$ |
| Full Scale Error ⁽⁴⁾ | | | ± 2 | ± 0.5 | | | ± 0.25 | $\text{ppm}/^\circ\text{C}$ |
| Full Scale Error Drift | | | ± 2 | ± 10 | | | * | $\text{ppm}/^\circ\text{C}$ |
| Bipolar Zero Error | | | ± 2 | ± 0.1 | | | * | mV |
| Bipolar Zero Error Drift | | | ± 0.5 | | | | ± 0.1 | $\text{ppm}/^\circ\text{C}$ |
| Channel-to-Channel Mismatch | | | | | | | | $\%$ |
| Power Supply Sensitivity | $+4.75 < V_S < +5.25$ | | | | | | | LSB |
| AC ACCURACY | | | | | | | | |
| Spurious-Free Dynamic Range ⁽⁵⁾ | $f_{IN} = 1\text{kHz}$ | 80 | 90 | -80 | * | * | * | dB |
| Total Harmonic Distortion | $f_{IN} = 1\text{kHz}$ | | -90 | | | | | dB |
| Signal-to-(Noise+Distortion) | $f_{IN} = 1\text{kHz}$ | 70 | 73 | | 72 | * | * | dB |
| Signal-to-Noise | $f_{IN} = 1\text{kHz}$ | 70 | 73 | | 72 | * | * | dB |
| Channel Separation ⁽⁶⁾ | $f_{IN} = 1\text{kHz}$ | 90 | 100 | | * | * | * | dB |
| -3dB Bandwidth | | | 2 | | | | | MHz |
| Useable Bandwidth ⁽⁷⁾ | | | 90 | | | | | kHz |
| SAMPLING DYNAMICS | | | | | | | | |
| Aperture Delay | FS Step | | 40 | | | | | ns |
| Transient Response ⁽⁸⁾ | | | 5 | | | | | μs |
| Overvoltage Recovery ⁽⁹⁾ | | | 1 | | | | | μs |
| REFERENCE | | | | | | | | |
| Internal Reference Voltage | | 2.48 | 2.5 | 2.52 | * | * | * | V |
| Internal Reference Source Current (Must use external buffer) | | | 1 | | | | | μA |
| External Reference Voltage Range for Specified Linearity | | 2.3 | 2.5 | 2.7 | * | * | * | V |
| External Reference Current Drain | $V_{REF} = +2.5\text{V}$ | | | 100 | | | | μA |
| DIGITAL INPUTS | | | | | | | | |
| Logic Levels | | | -0.3 | | | | | V |
| V_{IL} | | | +2.4 | | | | | V |
| V_{IH} | | | | $+0.8$ | | | | V |
| I_{IL} | | | | $V_S + 0.3\text{V}$ | | | | μA |
| I_{IH} | | | | ± 10 | | | | μA |
| ± 10 | | | | ± 10 | | | | |
| DIGITAL OUTPUTS | | | | | | | | |
| Data Format | | | | Parallel in two bytes; Serial | | | | |
| Data Coding | | | | Binary Two's Complement | | | | |
| V_{OL} | | | | +0.4 | | | | V |
| V_{OH} | | | | | | | | V |
| Leakage Current | $I_{SINK} = 1.6\text{mA}$ | +4 | | | * | * | * | μA |
| Output Capacitance | $I_{SOURCE} = 500\mu\text{A}$ | | | ± 5 | | | | pF |
| | High-Z State, $V_{OUT} = 0\text{V}$ to V_S | | | 15 | | | | |
| | High-Z State | | | | | | | |

The information provided herein is believed to be reliable; however, BURR-BROWN assumes no responsibility for inaccuracies or omissions. BURR-BROWN assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. BURR-BROWN does not authorize or warrant any BURR-BROWN product for use in life support devices and/or systems.

SPECIFICATIONS (CONT)

ELECTRICAL

At $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$, $f_S = 40\text{kHz}$, $V_{S1} = V_{S2} = V_S = +5\text{V} \pm 5\%$, using external reference, $\text{CONTC} = 0\text{V}$, unless otherwise specified.

| PARAMETER | CONDITIONS | ADS7824P, U | | | ADS7824PB, UB | | | UNITS |
|---|----------------------|-------------|-----|-------|---------------|-----|-----|---------------------------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | |
| DIGITAL TIMING | | | | | | | | |
| Bus Access Time | PAR/SER = +5V | | | 83 | | | * | ns |
| Bus Relinquish Time | PAR/SER = +5V | | | 83 | | | * | ns |
| Data Clock | PAR/SER = 0V | | | | | | | |
| Internal Clock (Output only when transmitting data) | EXT/INT LOW | 0.5 | | 1.5 | * | | * | MHz |
| External Clock | EXT/INT HIGH | 0.1 | | 10 | * | | * | MHz |
| POWER SUPPLIES | | | | | | | | |
| $V_{S1} = V_{S2} = V_S$ | | +4.75 | +5 | +5.25 | * | * | * | V |
| Power Dissipation | $f_S = 40\text{kHz}$ | | 50 | 50 | | * | * | mW |
| | PWRD HIGH | | | | | | | μW |
| TEMPERATURE RANGE | | | | | | | | |
| Specified Performance | | -40 | | +85 | * | | * | $^\circ\text{C}$ |
| Storage | | -65 | | +150 | * | | * | $^\circ\text{C}$ |
| Thermal Resistance (θ_{JA}) | | | | 75 | | | | $^\circ\text{C}/\text{W}$ |
| Plastic DIP | | | | 75 | | | | $^\circ\text{C}/\text{W}$ |
| SOIC | | | | | | | | $^\circ\text{C}/\text{W}$ |

NOTES: (1) An asterik (*) specifies same value as grade to the left. (2) LSB means Least Significant Bit. For the 12-bit, $\pm 10\text{V}$ input ADS7824, one LSB is 4.88mV . (3) Typical rms noise at worst case transitions and temperatures. (4) Full scale error is the worst case of -Full Scale or +Full Scale untrimmed deviation from ideal first and last code transitions, divided by the transition voltage (not divided by the full-scale range) and includes the effect of offset error. (5) All specifications in dB are referred to a full-scale $\pm 10\text{V}$ input. (6) A full scale sinewave input on one channel will be attenuated by this amount on the other channels. (7) Useable Bandwidth defined as Full-Scale input frequency at which Signal-to-(Noise+Distortion) degrades to 60dB , or 10 bits of accuracy. (8) The ADS7824 will accurately acquire any input step if given a full acquisition period after the step. (9) Recovers to specified performance after $2 \times \text{FS}$ input overvoltage, and normal acquisitions can begin.

PACKAGE/ORDERING INFORMATION


| PRODUCT | PACKAGE | PACKAGE DRAWING NUMBER ⁽¹⁾ | TEMPERATURE RANGE | MAXIMUM INTEGRAL LINEARITY ERROR (LSB) | MINIMUM SIGNAL-TO-(NOISE + DISTORTION) RATIO (dB) |
|-----------|-------------|---------------------------------------|-------------------|--|---|
| ADS7824P | Plastic Dip | 246 | -40°C to +85°C | ± 1 | 70 |
| ADS7824PB | Plastic Dip | 246 | -40°C to +85°C | ± 0.5 | 72 |
| ADS7824U | SOIC | 217 | -40°C to +85°C | ± 1 | 70 |
| ADS7824UB | SOIC | 217 | -40°C to +85°C | ± 0.5 | 72 |

NOTE: (1) For detailed drawing and dimension table, please see end of data sheet, or Appendix C of Burr-Brown IC Data Book.

ABSOLUTE MAXIMUM RATINGS

| | |
|--|---|
| Analog Inputs: A_{IN_0} , A_{IN_1} , A_{IN_2} , A_{IN_3} | $\pm 15\text{V}$ |
| REF | (AGND2 -0.3V) to $(V_S + 0.3\text{V})$ |
| CAP | Indefinite Short to AGND2, Momentary Short to V_S |
| V_{S1} and V_{S2} to AGND2 | -0.7V |
| V_{S1} to V_{S2} | -0.3V |
| Difference between AGND1, AGND2 and DGND | $\pm 0.3\text{V}$ |
| Digital Inputs and Outputs | -0.3V to $(V_S + 0.3\text{V})$ |
| Maximum Junction Temperature | 150°C |
| Internal Power Dissipation | 825mW |
| Lead Temperature (soldering, 10s) | +300°C |
| Maximum Input Current to Any Pin | 100mA |

PIN CONFIGURATION

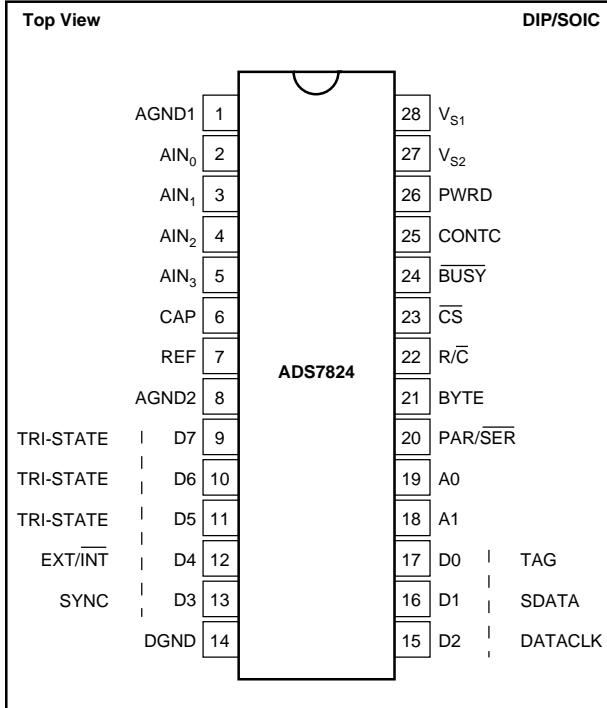

ELECTROSTATIC DISCHARGE SENSITIVITY

This integrated circuit can be damaged by ESD. Burr-Brown recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

BURR-BROWN®

ADS7824









PIN ASSIGNMENTS

| PIN # | NAME | I/O | DESCRIPTION |
|-------|------------------|-----|---|
| 1 | AGND1 | | Analog Ground. Used internally as ground reference point. |
| 2 | AIN ₀ | | Analog Input Channel 0. Full-scale input range is $\pm 10V$. |
| 3 | AIN ₁ | | Analog Input Channel 1. Full-scale input range is $\pm 10V$. |
| 4 | AIN ₂ | | Analog Input Channel 2. Full-scale input range is $\pm 10V$. |
| 5 | AIN ₃ | | Analog Input Channel 3. Full-scale input range is $\pm 10V$. |
| 6 | CAP | | Internal Reference Output Buffer. $2.2\mu F$ Tantalum to ground. |
| 7 | REF | | Reference Input/Output. Outputs $+2.5V$ nominal. If used externally, must be buffered to maintain ADS7825 accuracy. Can also be driven by external system reference. In both cases, bypass to ground with a $2.2\mu F$ Tantalum capacitor. |
| 8 | AGND2 | | Analog Ground. |
| 9 | D7 | O | Parallel Data Bit 7 if PAR/SER HIGH; Tri-state if PAR/SER LOW. See Table I. |
| 10 | D6 | O | Parallel Data Bit 6 if PAR/SER HIGH; Tri-state if PAR/SER LOW. See Table I. |
| 11 | D5 | O | Parallel Data Bit 5 if PAR/SER HIGH; Tri-state if PAR/SER LOW. See Table I. |
| 12 | D4 | I/O | Parallel Data Bit 4 if PAR/SER HIGH; if PAR/SER LOW, a LOW level input here will transmit serial data on SDATA from the previous conversion using the internal serial clock; a HIGH input here will transmit serial data using an external serial clock input on DATACLK (D2). See Table I. |
| 13 | D3 | O | Parallel Data Bit 3 if PAR/SER HIGH; SYNC output if PAR/SER LOW. See Table I. |
| 14 | DGND | | Digital Ground. |
| 15 | D2 | I/O | Parallel Data Bit 2 if PAR/SER HIGH; if PAR/SER LOW, this will output the internal serial clock if EXT/INT (D4) is LOW; will be an input for an external serial clock if EXT/INT (D4) is HIGH. See Table I. |
| 16 | D1 | O | Parallel Data Bit 1 if PAR/SER HIGH; SDATA serial data output if PAR/SER LOW. See Table I. |
| 17 | D0 | I/O | Parallel Data Bit 0 if PAR/SER HIGH; TAG data input if PAR/SER LOW. See Table I. |
| 18 | A1 | I/O | Channel Address. Input if CONTC LOW, output if CONTC HIGH. See Table I. |
| 19 | A0 | I/O | Channel Address. Input if CONTC LOW, output if CONTC HIGH. See Table I. |
| 20 | PAR/SER | I | Select Parallel or Serial Output. If HIGH, parallel data will be output on D0 thru D7. If LOW, serial data will be output on SDATA. See Table I and Figure 1. |
| 21 | BYTE | I | Byte Select. Only used with parallel data, when PAR/SER HIGH. Determines which byte is available on D0 thru D7. Changing BYTE with CS LOW and R/C HIGH will cause the data bus to change accordingly. LOW selects the 8 MSBs; HIGH selects the 4 LSBs, see Figures 2 and 3. |
| 22 | R/C | I | Read/Convert Input. With CS LOW, a falling edge on R/C puts the internal sample/hold into the hold state and starts a conversion. With CS LOW, a rising edge on R/C enables the output data bits if PAR/SER HIGH, or starts transmission of serial data if PAR/SER LOW and EXT/INT HIGH. |
| 23 | CS | I | Chip Select. Internally OR'd with R/C. With CONTC LOW and R/C LOW, a falling edge on CS will initiate a conversion. With R/C HIGH, a falling edge on CS will enable the output data bits if PAR/SER HIGH, or starts transmission of serial data if PAR/SER LOW and EXT/INT HIGH. |
| 24 | BUSY | O | Busy Output. Falls when conversion is started; remains LOW until the conversion is completed and the data is latched into the output register. In parallel output mode, output data will be valid when BUSY rises, so that the rising edge can be used to latch the data. |
| 25 | CONTC | I | Continuous Conversion Input. If LOW, conversions will occur normally when initiated using CS and R/C; if HIGH, acquisition and conversions will take place continually, cycling through all four input channels, as long as CS, R/C and PWRD are LOW. See Table I. For serial mode only. |
| 26 | PWRD | I | Power Down Input. If HIGH, conversions are inhibited and power consumption is significantly reduced. Results from the previous conversion are maintained in the output register. In the continuous conversion mode, the multiplexer address channel is reset to channel 0 |
| 27 | V _{S2} | | Supply Input. Nominally $+5V$. Connect directly to pin 28. Decouple to ground with $0.1\mu F$ ceramic and $10\mu F$ Tantalum capacitors. |
| 28 | V _{S1} | | Supply Input. Nominally $+5V$. Connect directly to pin 27. |



TYPICAL PERFORMANCE CURVES

At $T_A = +25^\circ\text{C}$, $f_S = 40\text{kHz}$, $V_{S1} = V_{S2} = +5\text{V}$, using internal reference, unless otherwise noted.

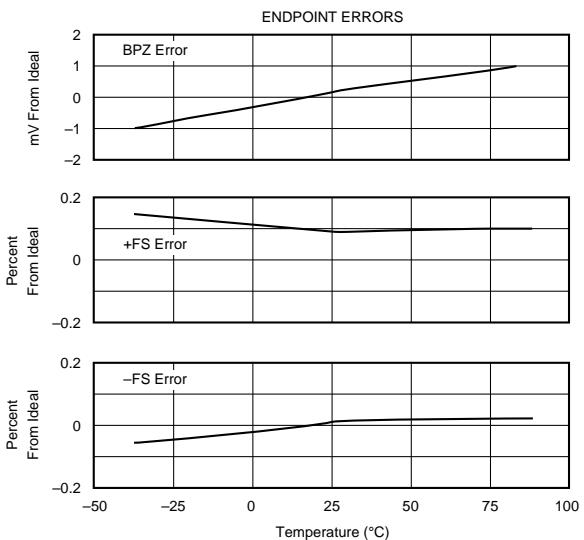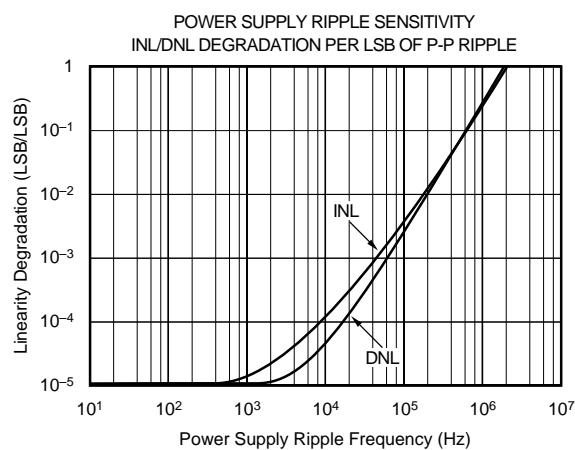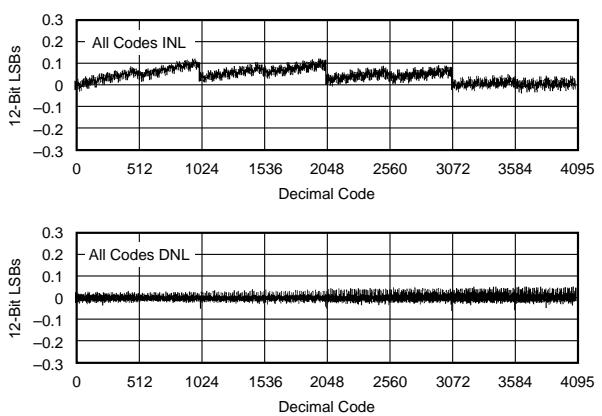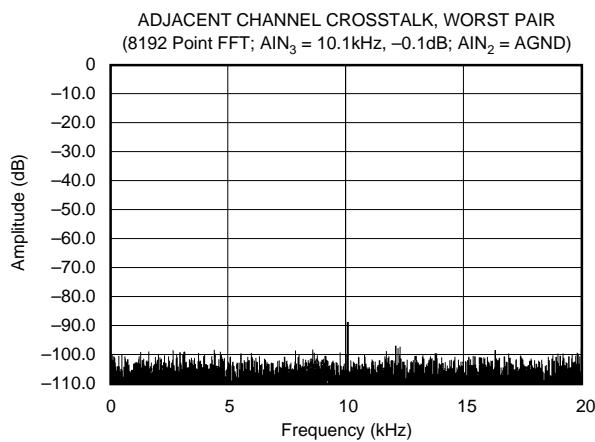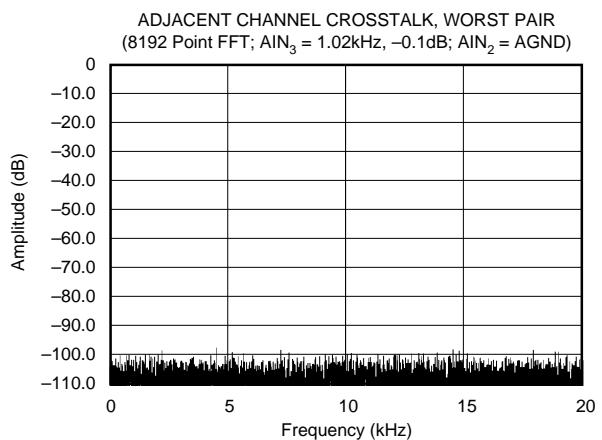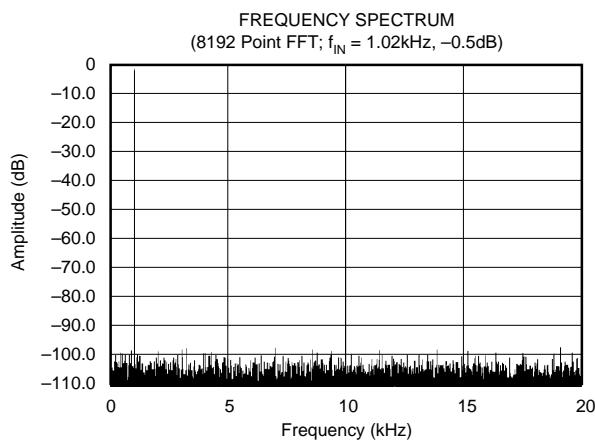

TYPICAL PERFORMANCE CURVES (CONT)

At $T_A = +25^\circ\text{C}$, $f_S = 40\text{kHz}$, $V_{S1} = V_{S2} = +5\text{V}$, using internal reference, unless otherwise noted.

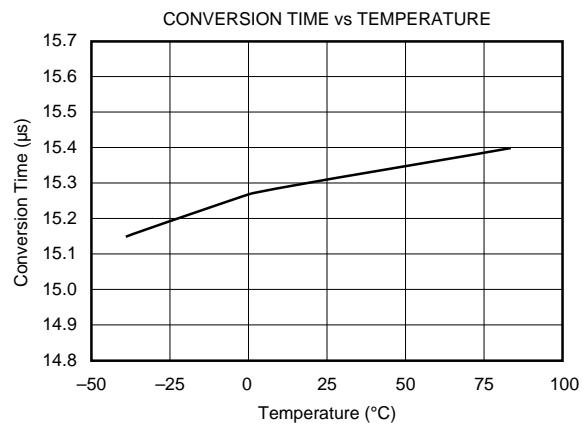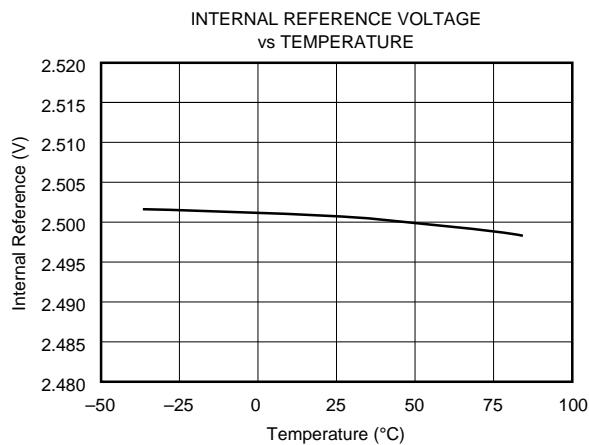

BASIC OPERATION

PARALLEL OUTPUT

Figure 1a shows a basic circuit to operate the ADS7824 with parallel output (Channel 0 selected). Taking $\overline{R/C}$ (pin 22) LOW for 40ns (12 μ s max) will initiate a conversion. \overline{BUSY} (pin 24) will go LOW and stay LOW until the conversion is completed and the output register is updated. If $BYTE$ (pin 21) is LOW, the 8 most significant bits will be valid when pin 24 rises; if $BYTE$ is HIGH, the 4 least significant bits will be valid when \overline{BUSY} rises. Data will be output in Binary Two's Complement format. \overline{BUSY} going HIGH can be used to latch the data. After the first byte has been read, $BYTE$ can be toggled allowing the remaining byte to be read. All convert commands will be ignored while \overline{BUSY} is LOW.

The ADS7824 will begin tracking the input signal at the end of the conversion. Allowing 25 μ s between convert commands assures accurate acquisition of a new signal.

SERIAL OUTPUT

Figure 1b shows a basic circuit to operate the ADS7824 with serial output (Channel 0 selected). Taking R/̄C (pin 22) LOW for 40ns (12μs max) will initiate a conversion and output valid data from the previous conversion on SDATA (pin 16) synchronized to 12 clock pulses output on DATACLK (pin 15). BUSY (pin 24) will go LOW and stay LOW until the conversion is completed and the serial data has been transmitted. Data will be output in Binary Two's Complement format, MSB first, and will be valid on both the rising and falling edges of the data clock. BUSY going HIGH can be used to latch the data. All convert commands will be ignored while BUSY is LOW.

The ADS7824 will begin tracking the input signal at the end of the conversion. Allowing 25 μ s between convert commands assures accurate acquisition of a new signal.

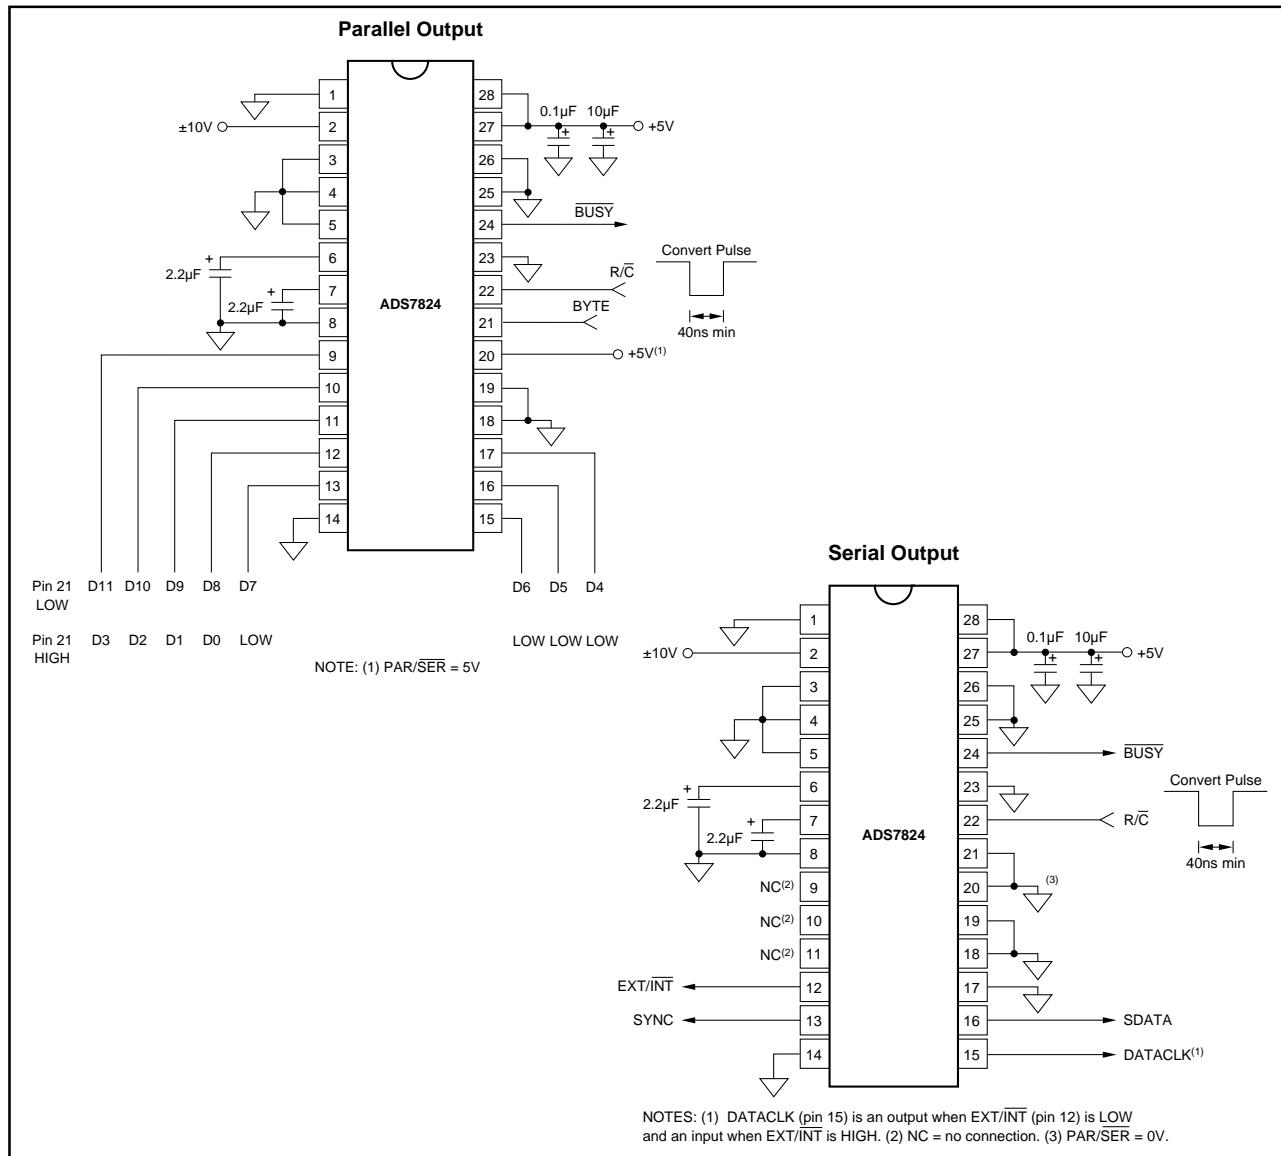


FIGURE 1. Basic Connection Diagram, (a) Parallel Output, (b) Serial Output.

STARTING A CONVERSION

The combination of \overline{CS} (pin 23) and R/\overline{C} (pin 22) LOW for a minimum of 40ns places the sample/hold of the ADS7824 in the hold state and starts conversion ‘n’. \overline{BUSY} (pin 24) will go LOW and stay LOW until conversion ‘n’ is completed and the internal output register has been updated. All new convert commands during \overline{BUSY} LOW will be ignored. \overline{CS} and/or R/\overline{C} must go HIGH before \overline{BUSY} goes HIGH or a new conversion will be initiated without sufficient time to acquire a new signal.

The ADS7824 will begin tracking the input signal at the end of the conversion. Allowing 25 μ s between convert commands assures accurate acquisition of a new signal. Refer to Tables Ia and Ib for a summary of \overline{CS} , R/\overline{C} , and \overline{BUSY} states and Figures 2 through 6 and Table II for timing information.

\overline{CS} and R/\overline{C} are internally OR’d and level triggered. There is not a requirement which input goes LOW first when

initiating a conversion. If, however, it is critical that \overline{CS} or R/\overline{C} initiates conversion ‘n’, be sure the less critical input is LOW at least 10ns prior to the initiating input. If EXT/INT (pin 12) is LOW when initiating conversion ‘n’, serial data from conversion ‘n – 1’ will be output on $SDATA$ (pin 16) following the start of conversion ‘n’. See Internal Data Clock in the Reading Data section.

To reduce the number of control pins, \overline{CS} can be tied LOW using R/\overline{C} to control the read and convert modes. This will have no effect when using the internal data clock in the serial output mode. However, the parallel output and the serial output (only when using an external data clock) will be affected whenever R/\overline{C} goes HIGH. Refer to the Reading Data section and Figures 2, 3, 5, and 6.

| INPUTS | | | | | | OUTPUTS | | | | | | | | | COMMENTS |
|-----------------|------------------|------|-------|------|-------------------|-----------|------|------|----------|------|------|------|------|--|--|
| \overline{CS} | R/\overline{C} | BYTE | CONTC | PWRD | \overline{BUSY} | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| 1 | X | X | X | X | X | Hi-Z | Hi-Z | Hi-Z | Hi-Z | Hi-Z | Hi-Z | Hi-Z | Hi-Z | | Results from last completed conversion. |
| X | 0 | X | X | X | X | Hi-Z | Hi-Z | Hi-Z | Hi-Z | Hi-Z | Hi-Z | Hi-Z | Hi-Z | | |
| 0 | 1 | 0 | X | X | X | D11 (MSB) | D10 | D9 | D8 | D7 | D6 | D5 | D4 | | Results from last completed conversion. |
| 0 | 1 | 1 | X | X | X | D3 | D2 | D1 | D0 (LSB) | LOW | LOW | LOW | LOW | | Data will change at the end of a conversion. |
| 0 | 1 | X | X | X | ↑ | ↑↓ | ↑↓ | ↑↓ | ↑↓ | ↑↓ | ↑↓ | ↑↓ | ↑↓ | | |

TABLE Ia. Read Control for Parallel Data (PAR/SER = 5V.)

| \overline{CS} | R/\overline{C} | CONTC | PWRD | <u>BUSY</u> | D7, D6, D5 LOW | D4 EXT/INT | D3 SYNC | D2 DATACLK | D1 SDATA | D0 TAG | COMMENTS | | | |
|-----------------|------------------|-------|-------|-------------|----------------|------------|---------|------------|----------|--------|--|-------|-------|-------|
| Input | Input | Input | Input | Output | Output | Input | Output | I/O | Output | Input | Input | Input | Input | Input |
| 1 | X | X | X | 1 | Hi-Z | LOW | LOW | Output | Hi-Z | X | | | | |
| X | 0 | X | X | 1 | Hi-Z | LOW | LOW | Output | Hi-Z | X | | | | |
| 0 | ↓ | 0 | X | 1 | Hi-Z | LOW | LOW | Output | Output | X | Starts transmission of data from previous conversion on $SDATA$ synchronized to 12 pulses output on $DATACLK$. | | | |
| ↓ | 0 | 0 | X | 1 | Hi-Z | LOW | LOW | Output | Output | X | Starts transmission of data from previous conversion on $SDATA$ synchronized to 12 pulses output on $DATACLK$. | | | |
| 0 | 1 | 0 | X | X | Hi-Z | HIGH | LOW | Input | Output | Input | The level output on $SDATA$ will be the level input on TAG 12 $DATACLK$ input cycles earlier. | | | |
| 0 | 1 | 0 | X | ↑ | Hi-Z | HIGH | LOW | Input | Output | Input | At the end of the conversion, when \overline{BUSY} rises, data from the conversion will be shifted into the output registers. If $DATACLK$ is HIGH, valid data will be lost. | | | |
| 0 | ↑ | 0 | X | 1 | Hi-Z | HIGH | LOW | Input | Output | X | Initiates transmission of a HIGH pulse on $SYNC$ followed by data from last completed conversion on $SDATA$ synchronized to the input on $DATACLK$. | | | |
| ↓ | 1 | 0 | X | 1 | Hi-Z | HIGH | LOW | Input | Output | X | Initiates transmission of a HIGH pulse on $SYNC$ followed by data from last completed conversion on $SDATA$ synchronized to the input on $DATACLK$. | | | |
| 0 | 0 | 1 | 0 | ↓ | Hi-Z | LOW | LOW | Output | Output | X | Starts transmission of data from previous conversion on $SDATA$ synchronized to 12 pulses output on $DATACLK$ | | | |
| ↓ | 1 | X | X | X | Hi-Z | HIGH | Output | Input | Output | X | $SDATA$ becomes active. Inputs on $DATACLK$ shift out data. | | | |
| 0 | ↑ | X | X | X | Hi-Z | HIGH | Output | Input | Output | X | $SDATA$ becomes active. Inputs on $DATACLK$ shift out data. | | | |
| ↓ | 0 | 1 | X | X | Hi-Z | LOW | LOW | Output | Output | X | Restarts continuous conversion mode (n – 1 data transmitted when \overline{BUSY} is LOW). | | | |
| 0 | ↓ | 1 | X | X | Hi-Z | LOW | LOW | Output | Output | X | Restarts continuous conversion mode (n – 1 data transmitted when \overline{BUSY} is LOW). | | | |

TABLE Ib. Read Control for Serial Data (PAR/SER = 0V.)

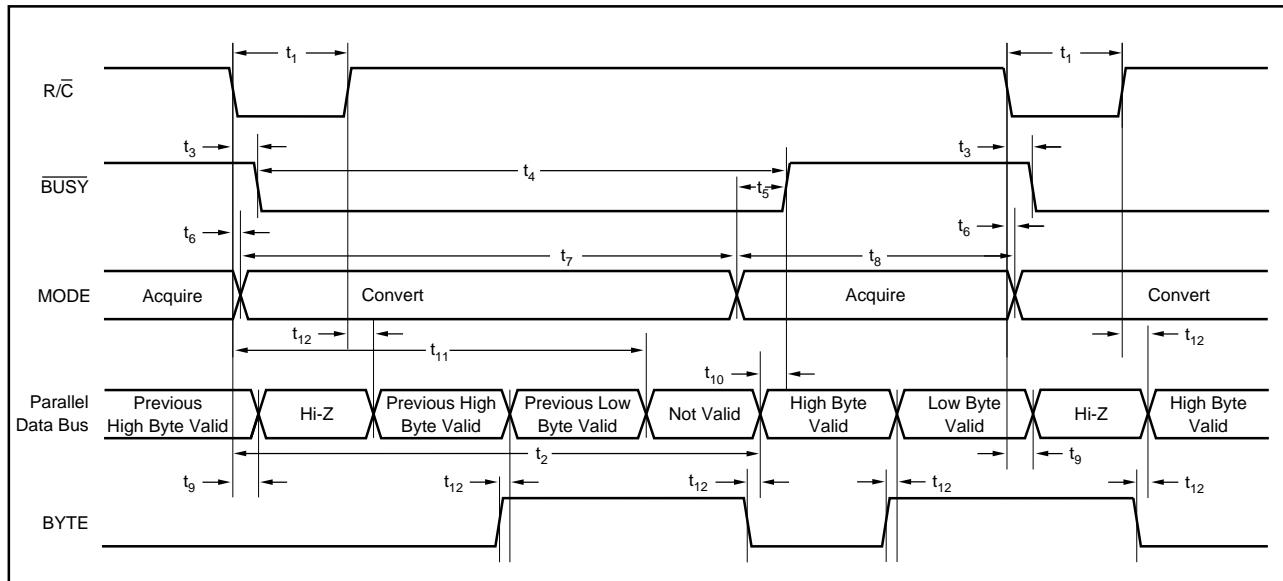


FIGURE 2. Conversion Timing with Parallel Output (\overline{CS} LOW).

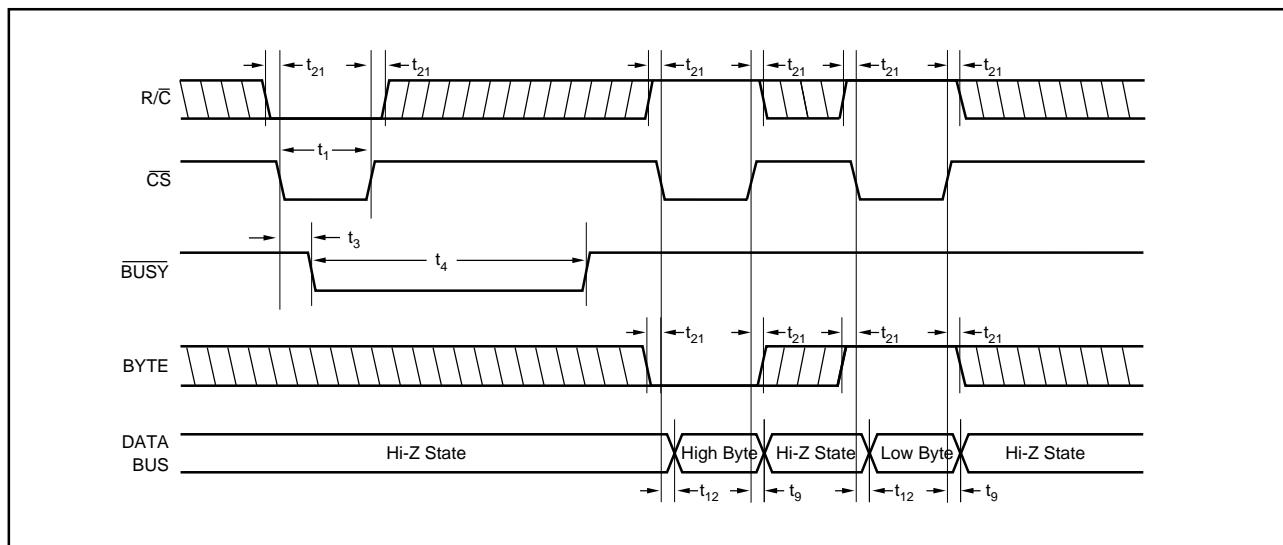


FIGURE 3. Using \overline{CS} to Control Conversion and Read Timing with Parallel Outputs.

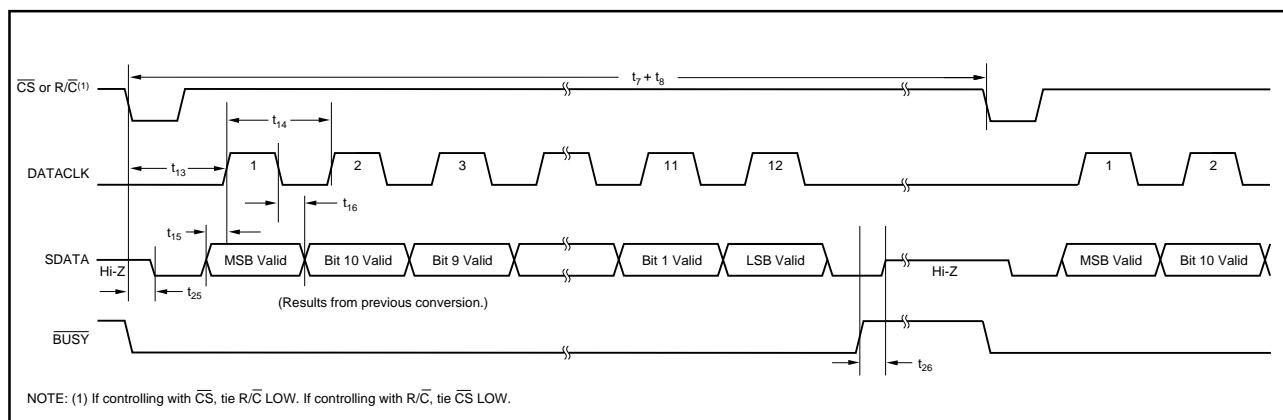


FIGURE 4. Serial Data Timing Using Internal Data Clock (TAG LOW).

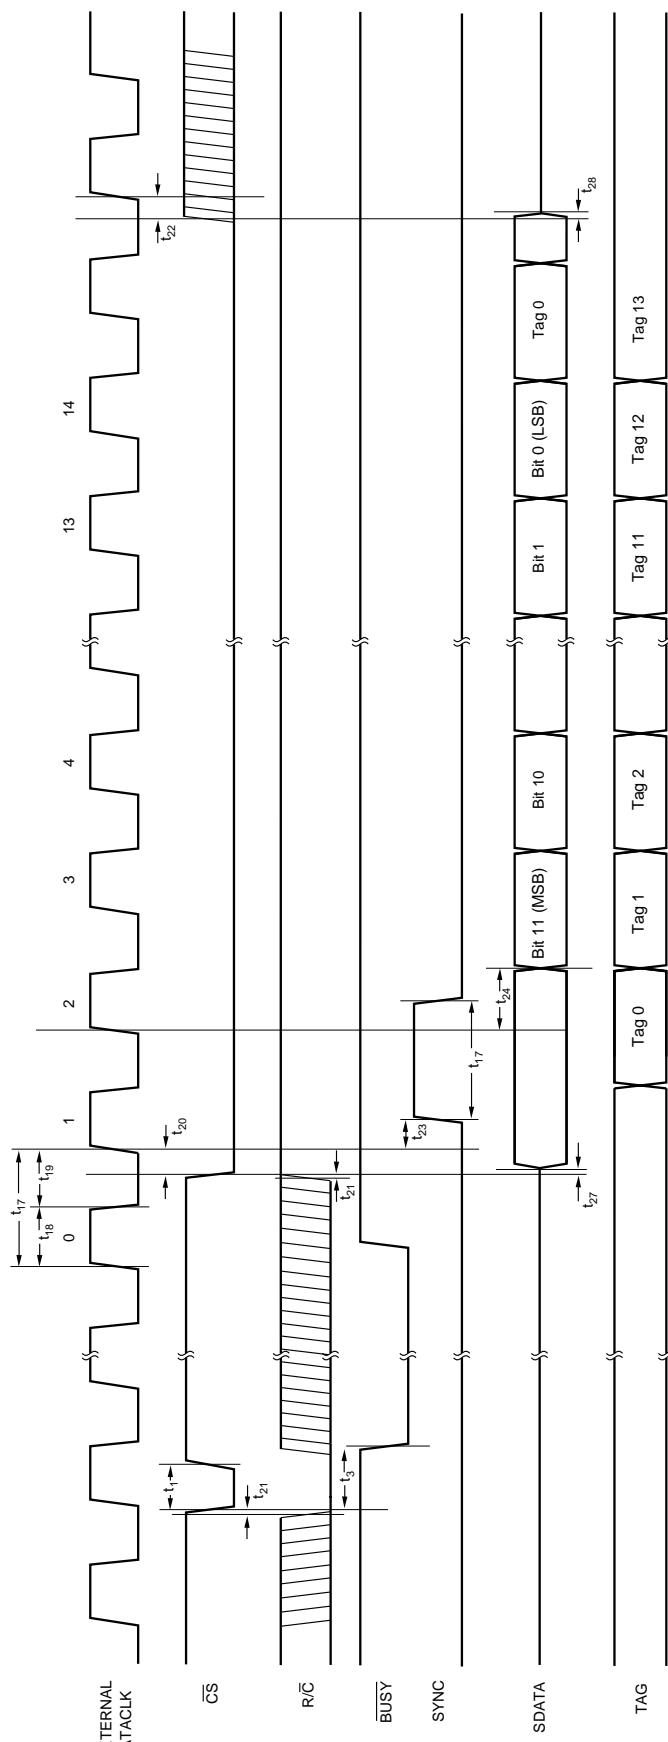


FIGURE 5. Conversion and Read Timing with External Clock (EXT/INT HIGH). Read After Conversion.

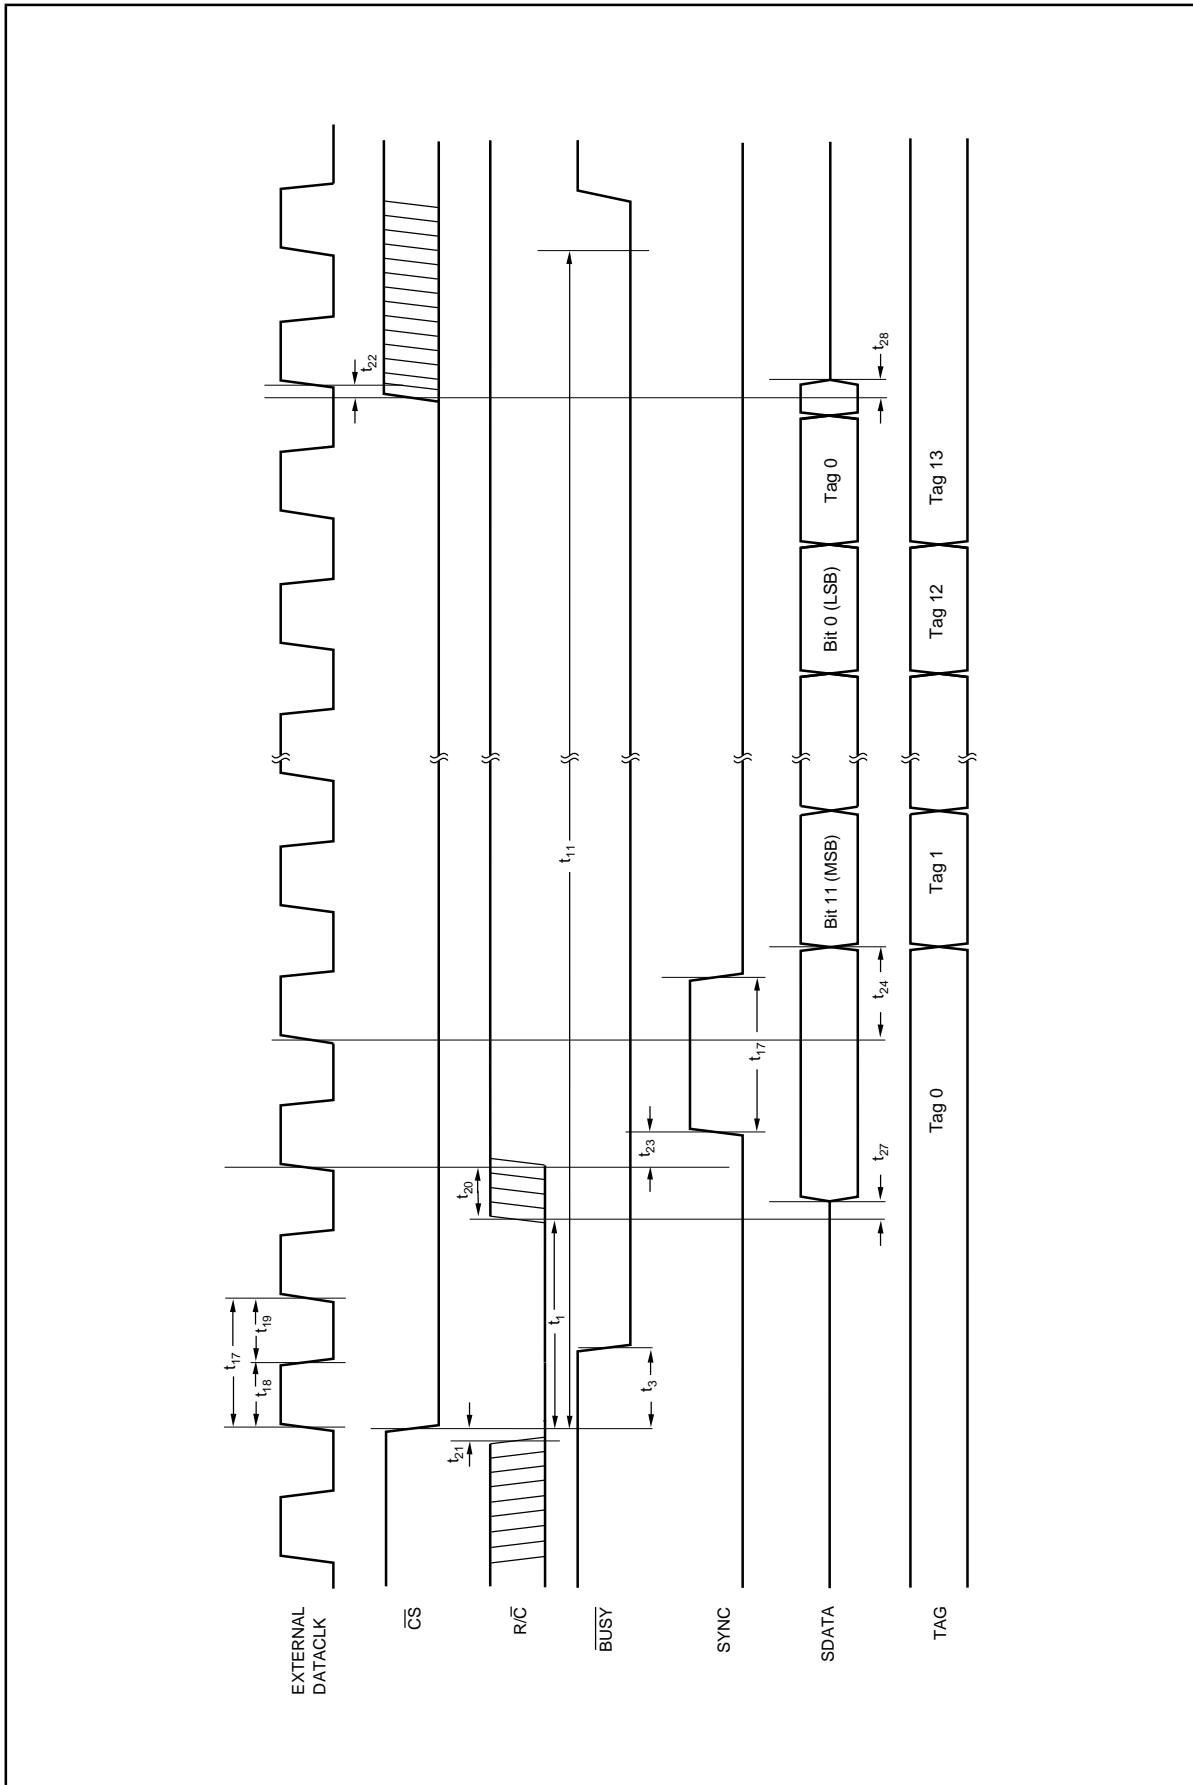


FIGURE 6. Conversion and Read Timing with External Clock (EXT/TINT HIGH). Read During Conversion (Previous Conversion Results).

READING DATA

PARALLEL OUTPUT

To use the parallel output, tie PAR/SER (pin 20) HIGH. The parallel output will be active when $\overline{R/C}$ (pin 22) is HIGH and \overline{CS} (pin 23) is LOW. Any other combination of \overline{CS} and $\overline{R/C}$ will tri-state the parallel output. Valid conversion data can be read in two 8-bit bytes on D7-D0 (pins 9-13 and 15-17). When BYTE (pin 21) is LOW, the 8 most significant bits will be valid with the MSB on D7. When BYTE is HIGH, the 4 least significant bits will be valid with the LSB on D4. BYTE can be toggled to read both bytes within one conversion cycle.

Upon initial power up, the parallel output will contain indeterminate data.

PARALLEL OUTPUT (After a Conversion)

After conversion 'n' is completed and the output registers have been updated, \overline{BUSY} (pin 24) will go HIGH. Valid data from conversion 'n' will be available on D7-D0 (pins 9-13 and 15-17). \overline{BUSY} going HIGH can be used to latch the data. Refer to Table II and Figures 2 and 3 for timing constraints.

PARALLEL OUTPUT (During a Conversion)

After conversion 'n' has been initiated, valid data from conversion 'n - 1' can be read and will be valid up to 12 μ s

after the start of conversion 'n'. Do not attempt to read data beyond 12 μ s after the start of conversion 'n' until \overline{BUSY} (pin 24) goes HIGH; this may result in reading invalid data. Refer to Table II and Figures 2 and 3 for timing constraints.

SERIAL OUTPUT

When PAR/SER (pin 20) is LOW, data can be clocked out serially with the internal data clock or an external data clock. When EXT/INT (pin 12) is LOW, DATACLK (pin 15) is an output and is always active regardless of the state of \overline{CS} (pin 23) and $\overline{R/C}$ (pin 22). The SDATA output is active when \overline{BUSY} (pin 24) is LOW. Otherwise, it is in a tri-state condition. When EXT/INT is HIGH, DATACLK is an input. The SDATA output is active when \overline{CS} is LOW and $\overline{R/C}$ is HIGH. Otherwise, it is in a tri-state condition. Regardless of the state of EXT/INT, SYNC (pin 13) is an output and always active, while TAG (pin 17) is always an input.

INTERNAL DATA CLOCK (During A Conversion)

To use the internal data clock, tie EXT/INT (pin 12) LOW. The combination of $\overline{R/C}$ (pin 22) and \overline{CS} (pin 23) LOW will initiate conversion 'n' and activate the internal data clock (typically 900kHz clock rate). The ADS7824 will output 12 bits of valid data, MSB first, from conversion 'n - 1' on SDATA (pin 16), synchronized to 12 clock pulses output on DATACLK (pin 15). The data will be valid on both the

| SYMBOL | DESCRIPTION | MIN | TYP | MAX | UNITS |
|-------------|---|-----|------|-----|---------|
| t_1 | Convert Pulse Width | | 0.04 | 12 | μ s |
| t_2 | Start of Conversion to New Data Valid | | 15 | 21 | μ s |
| t_3 | Start of Conversion to \overline{BUSY} LOW | | | 85 | ns |
| t_4 | \overline{BUSY} LOW | | 15 | 21 | μ s |
| t_5 | End of Conversion to \overline{BUSY} HIGH | | 90 | | ns |
| t_6 | Aperture Delay | | 40 | | ns |
| t_7 | Conversion Time | | 15 | 21 | μ s |
| t_8 | Acquisition Time | | 3 | 5 | μ s |
| $t_7 + t_8$ | Throughput Time | | | 25 | μ s |
| t_9 | Bus Relinquish Time | 10 | | 83 | ns |
| t_{10} | Data Valid to \overline{BUSY} HIGH | 20 | 60 | | ns |
| t_{11} | Start of Conversion to Previous Data Not Valid | 12 | 15 | | ns |
| t_{12} | Bus Access Time and BYTE Delay | | | 83 | ns |
| t_{13} | Start of Conversion to DATACLK Delay | | 1.4 | | μ s |
| t_{14} | DATACLK Period | | 1.1 | | μ s |
| t_{15} | Data Valid to DATACLK HIGH | 20 | 75 | | ns |
| t_{16} | DATACLK LOW to Data Not Valid | 400 | 600 | | ns |
| t_{17} | External DATACLK Period | 100 | | | ns |
| t_{18} | External DATACLK HIGH | 50 | | | ns |
| t_{19} | External DATACLK LOW | 40 | | | ns |
| t_{20} | \overline{CS} LOW and $\overline{R/C}$ HIGH to External DATACLK HIGH (Enable Clock) | 25 | | | ns |
| t_{21} | $\overline{R/C}$ to \overline{CS} Setup Time | 10 | | | ns |
| t_{22} | \overline{CS} HIGH or $\overline{R/C}$ LOW to External DATACLK HIGH (Disable Clock) | 25 | | | ns |
| t_{23} | DATACLK HIGH to SYNC HIGH | 15 | | 35 | ns |
| t_{24} | DATACLK HIGH to Valid Data | 25 | | 55 | ns |
| t_{25} | Start of Conversion to SDATA Active | | | 83 | ns |
| t_{26} | End of Conversion to SDATA Tri-State | | | 83 | ns |
| t_{27} | \overline{CS} LOW and $\overline{R/C}$ HIGH to SDATA Active | | | 83 | ns |
| t_{28} | \overline{CS} HIGH or $\overline{R/C}$ LOW to SDATA Tri-State | | | 83 | ns |
| t_{29} | \overline{BUSY} HIGH to Address Valid | | | 20 | ns |
| t_{30} | Address Valid to \overline{BUSY} LOW | | 500 | | ns |

TABLE II. Conversion, Data, and Address Timing. $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$.

rising and falling edges of the internal data clock. The rising edge of **BUSY** (pin 24) can be used to latch the data. After the 12th clock pulse, **DATACLK** will remain LOW until the next conversion is initiated, while **SDATA** will go to whatever logic level was input on **TAG** (pin 17) during the first clock pulse. The **SDATA** output will tri-state when **BUSY** returns HIGH. Refer to Table II and Figure 4 for timing information.

EXTERNAL DATA CLOCK

To use an external clock, tie **EXT/INT** (pin 12) HIGH. The external clock is not a conversion clock; it can only be used as a data clock. To enable the output mode of the ADS7824, **CS** (pin 23) must be LOW and **R/C** (pin 22) must be HIGH. **DATACLK** must be HIGH for 20% to 70% of the total data clock period; the clock rate can be between DC and 10MHz. Serial data from conversion 'n' can be output on **SDATA** (pin 16) after conversion 'n' is completed or during conversion 'n + 1'.

An obvious way to simplify control of the converter is to tie **CS** LOW while using **R/C** to initiate conversions. While this is perfectly acceptable, there is a possible problem when using an external data clock. At an indeterminate point from 12 μ s after the start of conversion 'n' until **BUSY** rises, the internal logic will shift the results of conversion 'n' into the output register. If **CS** is LOW, **R/C** is HIGH and the external clock is HIGH at this point, data will be lost. So, with **CS** LOW, either **R/C** and/or **DATACLK** must be LOW during this period to avoid losing valid data.

EXTERNAL DATA CLOCK (After a Conversion)

After conversion 'n' is completed and the output registers have been updated, **BUSY** (pin 24) will go HIGH. With **CS** LOW (pin 23) and **R/C** HIGH (pin 22), valid data from conversion 'n' will be output on **SDATA** (pin 16) synchronized to the external data clock input on **DATACLK** (pin 15). Between 15 and 35ns following the rising edge of the first external data clock, the **SYNC** output pin will go HIGH for one full data clock period (100ns minimum). The MSB will be valid between 25 and 55ns after the rising edge of the second data clock. The LSB will be valid on the 13th falling edge and the 14th rising edge of the data clock. **TAG** (pin 17) will input a bit of data for every external clock pulse. The first bit input on **TAG** will be valid on **SDATA** on the

14th falling edge and the 15th rising edge of **DATACLK**; the second input bit will be valid on the 15th falling edge and the 16th rising edge, etc. With a continuous data clock, **TAG** data will be output on **DATA** until the internal output registers are updated with the results from the next conversion. Refer to Table II and Figure 5 for timing information.

EXTERNAL DATA CLOCK (During a Conversion)

After conversion 'n' has been initiated, valid data from conversion 'n - 1' can be read and will be valid up to 12 μ s after the start of conversion 'n'. Do not attempt to clock out data from 12 μ s after the start of conversion 'n' until **BUSY** (pin 24) rises; this will result in data loss.

NOTE: For the best possible performance when using an external data clock, data should not be clocked out during a conversion. The switching noise of the asynchronous data clock can cause digital feedthrough degrading the converter's performance. Refer to Table II and Figure 6 for timing information.

TAG FEATURE

TAG (pin 17) inputs serial data synchronized to the external or internal data clock.

When using an external data clock, the serial bit stream input on **TAG** will follow the LSB output on **SDATA** (pin 16) until the internal output register is updated with new conversion results. See Table II and Figures 5 and 6.

The logic level input on **TAG** for the first rising edge of the internal data clock will be valid on **SDATA** after all 12 bits of valid data have been output.

MULTIPLEXER TIMING

The four channel input multiplexer may be addressed manually or placed in a continuous conversion mode where all four channels are sequentially addressed.

CONTINUOUS CONVERSION MODE (CONTC= 5V)

To place the ADS7824 in the continuous conversion mode, **CONTC** (pin 25) must be tied HIGH. In this mode, acquisition and conversions will take place continually, cycling through all four channels as long as **CS**, **R/C** and **PWRD** are LOW (See Table III). Whichever address was last loaded

| CONTC | CS | R/C | BUSY | PWRD | A0 and A1 | OPERATION |
|-------|----|-----|------|------|-----------|---|
| 0 | X | X | X | X | Inputs | Initiating conversion n latches in the levels input on A0 and A1 to select the channel for conversion 'n + 1'. |
| 0 | X | X | 0 | 0 | Inputs | Conversion in process. New convert commands ignored. |
| 0 | 0 | ↓ | 1 | 0 | Inputs | Initiates conversion on channel selected at start of previous conversion. |
| 0 | ↓ | 0 | 1 | 0 | Inputs | Initiates conversion on channel selected at start of previous conversion. |
| 0 | X | X | X | 1 | Inputs | All analog functions powered down. Conversions in process or initiated will yield meaningless data. |
| 1 | X | X | X | X | Outputs | The end of conversion n (when BUSY rises) increments the internal channel latches and outputs the channel address for conversion 'n + 1' on A0 and A1. |
| 1 | X | X | 0 | 0 | Outputs | Conversion in process. |
| 1 | 0 | ↓ | 1 | 0 | Outputs | Restarts continuous conversion process on next input channel. |
| 1 | ↓ | 0 | 1 | 0 | Outputs | Restarts continuous conversion process on next input channel. |
| 1 | X | X | X | 1 | Outputs | All analog functions powered down. Conversions in process or initiated will yield meaningless data. Resets selected input channel for next conversion to AIN₀ . |

TABLE III. Conversion Control.

into the A0 and A1 registers (pins 19 and 18, respectively) prior to CONTC being raised HIGH, becomes the first address in the sequential continuous conversion mode (e.g., if Channel 1 was the last address selected then Channel 2 will follow, then Channel 3, and so on). The A0 and A1 address inputs become outputs when the device is in this mode. When BUSY rises at the end of a conversion, A0 and A1 will output the address of the channel that will be converted when BUSY goes LOW at the beginning of the next conversion. Data will be valid for the previous channel after BUSY rises. The address lines are updated when BUSY rises. See Table IVa and Figure 7 for channel selection timing in continuous conversion mode.

PWRD (pin 26) can be used to reset the multiplexer address to zero. With the ADS7824 configured for no conversion, PWRD can be taken HIGH for a minimum of 200ns. When PWRD returns LOW, the multiplexer address will be reset to zero. When the continuous conversion mode is enabled, the first conversion will be done on Channel 0. Subsequent

conversions will proceed through each higher channel, cycling back to zero after Channel 3.

If PWRD is held HIGH for a significant period of time, the REF (pin 7) bypass capacitor may discharge (if the internal reference is being utilized) and the CAP (pin 6) bypass capacitor will discharge (for both internal and external references). The continuous conversion mode should not be enabled until the bypass capacitor(s) have recharged and stabilized (1ms for 2.2 μ F capacitors recommended). In addition, the continuous conversion mode should not be enabled even with a short pulse on PWRD until the minimum acquisition time has been met.

MANUAL CHANNEL SELECTION (CONTC= 0V)

The channels of the ADS7824 can be selected manually by using the A0 and A1 address pins (pins 19 and 18, respectively). See Table IVb for the multiplexer truth table and Figure 8 for channel selection timing.

ADS7824 TIMING AND CONTROL

| A1 | A0 | DATA AVAILABLE FROM CHANNEL | CHANNEL TO BE OR BEING CONVERTED | DESCRIPTION OF OPERATION |
|----|----|-----------------------------|----------------------------------|--------------------------|
| 0 | 0 | AIN ₃ | AIN ₀ | |
| 0 | 1 | AIN ₀ | AIN ₁ | |
| 1 | 0 | AIN ₁ | AIN ₂ | |
| 1 | 1 | AIN ₂ | AIN ₃ | |

TABLE IVa. A0 and A1 Outputs (CONTC HIGH).

| A1 | A0 | CHANNEL SELECTED WHEN <u>BUSY</u> GOES HIGH | DESCRIPTION OF OPERATION |
|----|----|---|--------------------------|
| 0 | 0 | AIN ₀ | |
| 0 | 1 | AIN ₁ | |
| 1 | 0 | AIN ₂ | |
| 1 | 1 | AIN ₃ | |

TABLE IVb. A0 and A1 Inputs (CONTC LOW).

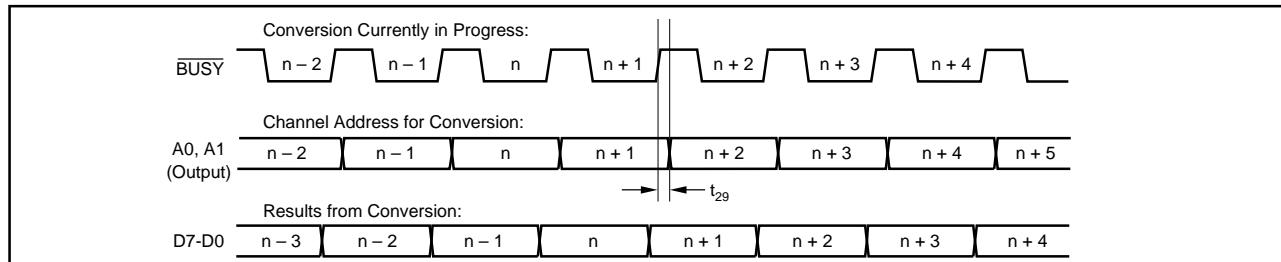


FIGURE 7. Channel Addressing in Continuous Conversion Mode (CONTC HIGH, CS and R/C LOW).

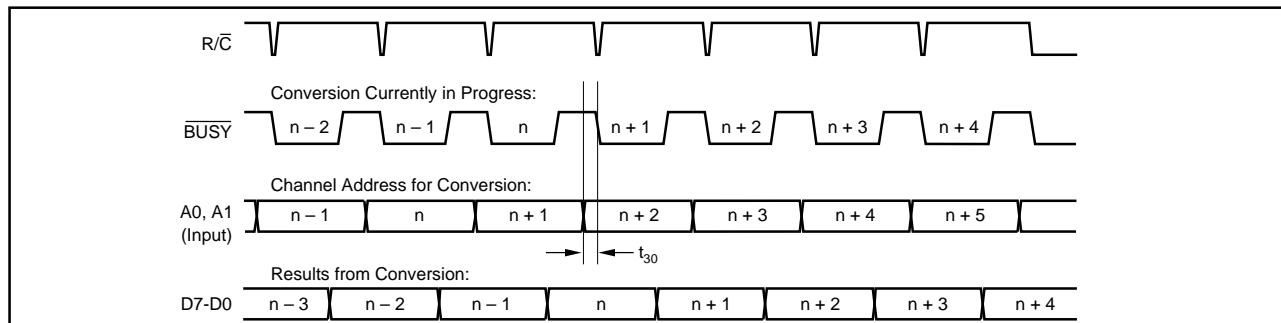


FIGURE 8. Channel Addressing in Normal Conversion Mode (CONTC and CS LOW).

CALIBRATION

The ADS7824 has no internal provision for correcting the individual bipolar zero error or full-scale error for each individual channel. Instead, the bipolar zero error of each channel is guaranteed to be below a level which is quite small for a converter with a $\pm 10V$ input range (slightly more than ± 2 LSBs). In addition, the channel errors should match each other to within 1 LSB.

For the full-scale error, the circuit of Figure 9 can be used. This will allow the reference to be adjusted such that the full-scale error for any single channel can be set to zero. Again, the close matching of the channels will ensure that the full-scale errors on the other channels will be small.

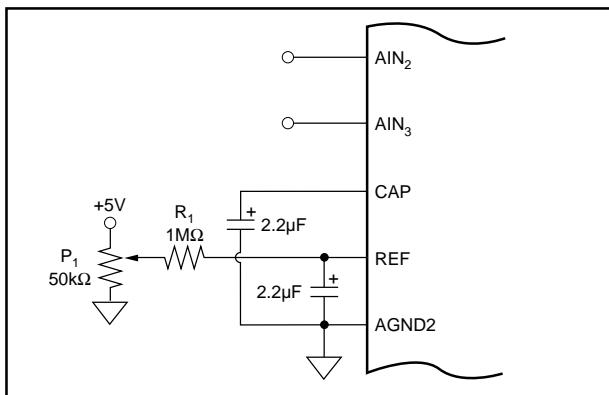


FIGURE 9. Full Scale Trim.

REFERENCE

The ADS7824 can operate with its internal 2.5V reference or an external reference. By applying an external reference to pin 7, the internal reference can be bypassed.

REF

REF (pin 7) is an input for an external reference or the output for the internal 2.5V reference. A $2.2\mu F$ capacitor should be connected as close to the REF pin as possible. This capacitor and the output resistance of REF create a low pass filter to bandlimit noise on the reference. Using a smaller value capacitor will introduce more noise to the reference degrading the SNR and SINAD. The REF pin should not be used to drive external AC or DC loads.

The range for the external reference is 2.3V to 2.7V and determines the actual LSB size. Increasing the reference voltage will increase the full scale range and the LSB size of the converter which can improve the SNR.

CAP

CAP (pin 6) is the output of the internal reference buffer. A $2.2\mu F$ capacitor should be placed as close to the CAP pin as possible to provide optimum switching currents for the CDAC throughout the conversion cycle. This capacitor also provides compensation for the output of the buffer. Using a capacitor any smaller than $1\mu F$ can cause the output buffer to oscillate and may not have sufficient charge for the

CDAC. Capacitor values larger than $2.2\mu F$ will have little affect on improving performance.

The output of the buffer is capable of driving up to 1mA of current to a DC load. Using an external buffer will allow the internal reference to be used for larger DC loads and AC loads. Do not attempt to directly drive an AC load with the output voltage on CAP. This will cause performance degradation of the converter.

PWRD

PWRD (pin 26) HIGH will power down all of the analog circuitry including the reference. Data from the previous conversion will be maintained in the internal registers and can still be read. With PWRD HIGH, a convert command yields meaningless data. When PWRD is returned LOW, adequate time must be provided in order for the capacitors on REF (pin 7) and CAP (pin 6) to recharge. For $2.2\mu F$ capacitors, a minimum recharge/settling time of 1ms is recommended before the conversion results should be considered valid.

LAYOUT

POWER

The ADS7824 uses 90% of its power for the analog circuitry, and the converter should be considered an analog component. For optimum performance, tie both power pins to the same +5V power supply and tie the analog and digital grounds together.

The +5V power for the converter should be separate from the +5V used for the system's digital logic. Connecting V_{S1} and V_{S2} (pins 28 and 27) directly to a digital supply can reduce converter performance due to switching noise from the digital logic. For best performance, the +5V supply can be produced from whatever analog supply is used for the rest of the analog signal conditioning. If +12V or +15V supplies are present, a simple +5V regulator can be used. Although it is not suggested, if the digital supply must be used to power the converter, be sure to properly filter the supply. Either using a filtered digital supply or a regulated analog supply, both V_{S1} and V_{S2} should be tied to the same +5V source.

GROUNDING

Three ground pins are present on the ADS7824. DGND is the digital supply ground. AGND2 is the analog supply ground. AGND1 is the ground which all analog signals internal to the A/D are referenced. AGND1 is more susceptible to current induced voltage drops and must have the path of least resistance back to the power supply.

All the ground pins of the A/D should be tied to an analog ground plane, separated from the system's digital logic ground, to achieve optimum performance. Both analog and digital ground planes should be tied to the 'system' ground as near to the power supplies as possible. This helps to prevent dynamic digital ground currents from modulating the analog ground through a common impedance to power ground.

CROSSTALK

With a full-scale 1kHz input signal, worst case crosstalk on the ADS7824 is better than -95dB . This should be adequate for even the most demanding applications. However, if crosstalk is a concern, the following items should be kept in mind:

The worst case crosstalk is generally from Channel 3 to 2. In addition, crosstalk from Channel 3 to any other channel is worse than from those channels to Channel 3. The reason for this is that channel three is nearer to the reference on the ADS7824. This allows two coupling modes: channel-to-channel and Channel 3 to the reference. In general, when crosstalk is a concern, avoid placing signals with higher frequency components on Channel 3.

If a particular channel should be as immune as possible from crosstalk, Channel 0 would be the best channel for the signal and Channel 1 should have the signal with the lowest frequency content. If two signals are to have as little crosstalk as possible, they should be placed on Channel 0 and Channel 2 with lower frequency, less-sensitive inputs on the other channels.

SIGNAL CONDITIONING

The FET switches used for the sample hold on many CMOS A/D converters release a significant amount of charge injection which can cause the driving op amp to oscillate. The amount of charge injection due to the sampling FET switch on the ADS7824 is approximately 5-10% of the amount on similar ADCs with the charge redistribution DAC (CDAC) architecture. There is also a resistive front end which attenuates any charge which is released. The end result is a

minimal requirement for the drive capability on the signal conditioning preceding the A/D. Any op amp sufficient for the signal in an application will be sufficient to drive the ADS7824.

The resistive front end of the ADS7824 also provides a guaranteed $\pm 15\text{V}$ overvoltage protection. In most cases, this eliminates the need for external over voltage protection circuitry.

INTERMEDIATE LATCHES

The ADS7824 does have tri-state outputs for the parallel port, but intermediate latches should be used if the bus will be active during conversions. If the bus is not active during conversions, the tri-state outputs can be used to isolate the A/D from other peripherals on the same bus.

Intermediate latches are beneficial on any monolithic A/D converter. The ADS7824 has an internal LSB size of $610\mu\text{V}$. Transients from fast switching signals on the parallel port, even when the A/D is tri-stated, can be coupled through the substrate to the analog circuitry causing degradation of converter performance. The effect of this phenomenon will be more obvious when using the pin-compatible ADS7825 or any of the other 16-bit converters in the ADS Family. This is due to the smaller LSB size of $38\mu\text{V}$.

For an ADS7824 with proper layout, grounding, and bypassing; the effect should only be a few tenths of an LSB at the most. In those cases where this is not true, it is possible for the conversion results to exhibit random errors of many LSBs. Poor grounding, poor bypassing, and high-speed digital signals will increase the magnitude of the errors.

PACKAGING INFORMATION

| Orderable Device | Status ⁽¹⁾ | Package Type | Package Drawing | Pins | Package Qty | Eco Plan ⁽²⁾ | Lead/Ball Finish | MSL Peak Temp ⁽³⁾ |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| ADS7824P | ACTIVE | PDIP | NT | 28 | 13 | Green (RoHS & no Sb/Br) | CU NIPDAU | N / A for Pkg Type |
| ADS7824PB | ACTIVE | PDIP | NT | 28 | 13 | Green (RoHS & no Sb/Br) | CU NIPDAU | N / A for Pkg Type |
| ADS7824PBG4 | ACTIVE | PDIP | NT | 28 | 13 | Green (RoHS & no Sb/Br) | CU NIPDAU | N / A for Pkg Type |
| ADS7824PG4 | ACTIVE | PDIP | NT | 28 | 13 | Green (RoHS & no Sb/Br) | CU NIPDAU | N / A for Pkg Type |
| ADS7824U | ACTIVE | SOIC | DW | 28 | 28 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-3-260C-168 HR |
| ADS7824U/1K | ACTIVE | SOIC | DW | 28 | 1000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-3-260C-168 HR |
| ADS7824U/1KE4 | ACTIVE | SOIC | DW | 28 | 1000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-3-260C-168 HR |
| ADS7824UB | ACTIVE | SOIC | DW | 28 | 28 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-3-260C-168 HR |
| ADS7824UB/1K | ACTIVE | SOIC | DW | 28 | 1000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-3-260C-168 HR |
| ADS7824UB/1KE4 | ACTIVE | SOIC | DW | 28 | 1000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-3-260C-168 HR |
| ADS7824UBE4 | ACTIVE | SOIC | DW | 28 | 28 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-3-260C-168 HR |
| ADS7824UE4 | ACTIVE | SOIC | DW | 28 | 28 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-3-260C-168 HR |

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBsolete: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.



Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)


⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

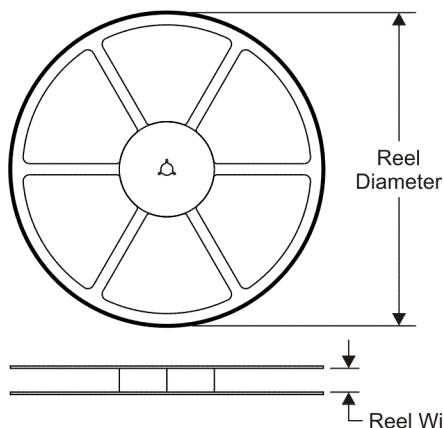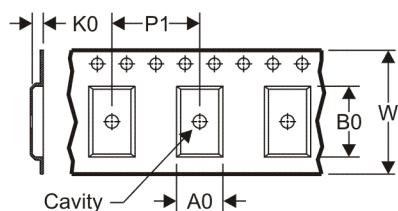TAPE AND REEL INFORMATION
REEL DIMENSIONS

TAPE DIMENSIONS

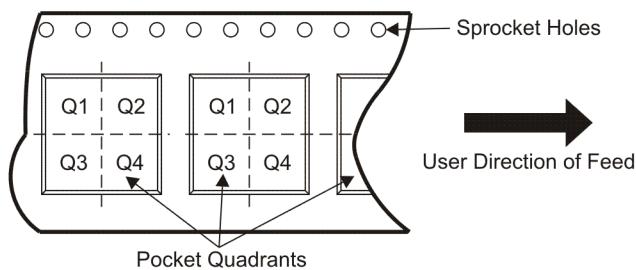
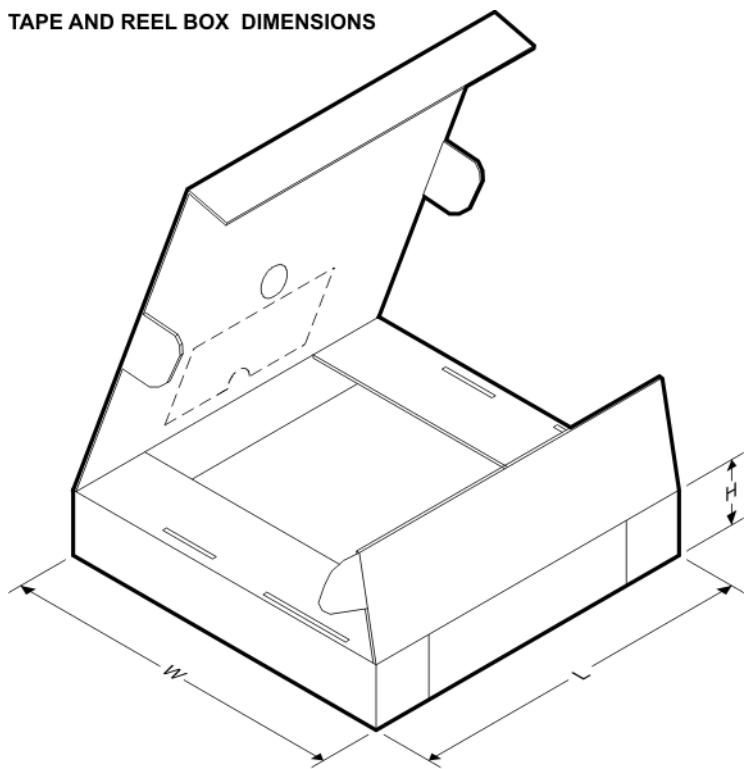
| | |
|----|---|
| A0 | Dimension designed to accommodate the component width |
| B0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| ADS7824U/1K | SOIC | DW | 28 | 1000 | 330.0 | 32.4 | 11.35 | 18.67 | 3.1 | 16.0 | 32.0 | Q1 |
| ADS7824UB/1K | SOIC | DW | 28 | 1000 | 330.0 | 32.4 | 11.35 | 18.67 | 3.1 | 16.0 | 32.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| ADS7824U/1K | SOIC | DW | 28 | 1000 | 346.0 | 346.0 | 49.0 |
| ADS7824UB/1K | SOIC | DW | 28 | 1000 | 346.0 | 346.0 | 49.0 |

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

| | |
|-----------------------------|--|
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| RF/IF and ZigBee® Solutions | www.ti.com/lprf |

Applications

| | |
|--------------------|--|
| Audio | www.ti.com/audio |
| Automotive | www.ti.com/automotive |
| Broadband | www.ti.com/broadband |
| Digital Control | www.ti.com/digitalcontrol |
| Medical | www.ti.com/medical |
| Military | www.ti.com/military |
| Optical Networking | www.ti.com/opticalnetwork |
| Security | www.ti.com/security |
| Telephony | www.ti.com/telephony |
| Video & Imaging | www.ti.com/video |
| Wireless | www.ti.com/wireless |

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265

Copyright © 2008, Texas Instruments Incorporated