



Precision Shunt Reference Solutions: LM404x and TL43x/TLV43x/TLVH43x

LM4040, LM4041

The Texas Instruments (TI) LM404x series of shunt voltage references are versatile, easy-to-use references for a vast array of applications, including data-acquisition systems, power supplies and power-supply monitors, instrumentation and test equipment, and battery-powered portable electronics. These shunt voltage references require no external capacitors for operation and are stable with all capacitive loads. Additionally, the reference offers low dynamic impedance, low noise and a low temperature coefficient to ensure a stable output voltage over a wide range of operating current and temperatures.


0.1%	LM4041A	LM4041A12	LM4040A20	LM4040A25	LM4040A30	LM4040A41	LM4040A50	LM4040A82*	LM4040A10*
0.2%	LM4041B	LM4041B12	LM4040B20	LM4040B25	LM4040B30	LM4040B41	LM4040B50	LM4040B82*	LM4040B10*
0.5%	LM4041C	LM4041C12	LM4040C20	LM4040C25	LM4040C30	LM4040C41	LM4040C50	LM4040C82*	LM4040C10*
1.0%	LM4041D	LM4041D12	LM4040D20	LM4040D25	LM4040D30	LM4040D41	LM4040D50	LM4040D82*	LM4040D10*
	Adjustable	1.225V	2.048V	2.5V	3.0V	4.096V	5.0V	8.192V	10V

*Planned release in 2Q06.

Device	V _{KA} (V)	25°C Accuracy Max (%)	Tempco Typ/Max (ppm/°C)	I _{KA} Range (mA)	Packages
LM4040	2.048 2.5 3.0 4.096 5.0 8.192* 10*	A = 0.1 B = 0.2 C = 0.5 D = 1	A, B, C Grades: 15/100 D Grade: 15/150	0.045 (typ) to 15	SOT23-3, SC-70
LM4041	1.225 Adj: 1.225 to 10			0.045 (typ) to 12	

*Planned release in 2Q06.

Packages and Pinouts

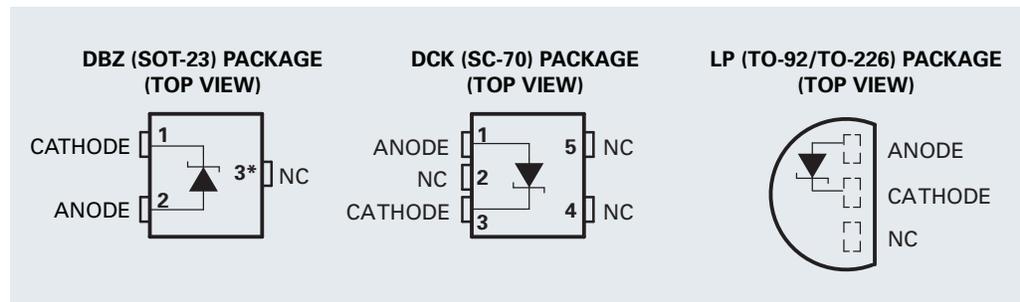


TL431, TL432, TLV431 and TLVH431/432

TI offers the most comprehensive portfolio of 431-type shunt regulators with its TL431/2, TLV431 and TLVH431/2 families. All are adjustable shunt regulators that offer a wide range of cathode voltage ($V_{KA} = 1.24V$ to $36V$) and current ($I_{KA} = 0.1$ mA to 100 mA). With sharp turn-on characteristics, low dynamic impedances to ensure excellent load regulation, and initial accuracies ranging from 0.4% to 2% , these regulators offer specified thermal stability over three separate temperature ranges to suit commercial, industrial and automotive needs. Applications include switching power supplies, linear regulators, references, amplifiers, constant current source/sinks, crowbars, under-/over-voltage protection and voltage monitors.

Device	V_{KA} (V)	V_{KA} 25°C Accuracy Max (%)	Drift Over Temp Typ/Max (mV)	I_{KA} Range (mA)	Packages
TL431, TL432	2.5 to 36	Standard: 2 A:1 B:0.5	6/16 (0 to 70°C) 14/334 (-40 to 85°C) 14/34 (-40 to 125°C)	1 to 100	SOT23-3, SOT23-5, SOT-89, TO-92, SC-70, SOIC, TSSOP, PDIP, SOP
TL431	2.5 to 36	0.4	4/20 (0 to 70°C) 17/55 (-40 to 125°C) 17/55 (-55 to 125°C)	1 to 100	SOIC, SSOP, TO-92, CDIP, LCCC
TLV431	1.24 to 6	Standard: 1.5 A: 1 B: 0.5	4/12 (0 to 70°C) 6/20 (-40 to 85°C) 11/31 (-40 to 125°C)	0.1 to 15	SOT23-3, SOT23-5, TO-92, SOIC, SC-70
TLVH431, TLVH432	1.24 to 18	Standard: 1.5 A: 1 B: 0.5	4/12 (0 to 70°C) 6/20 (-40 to 85°C) 11/31 (-40 to 125°C)	0.1 to 80	SOT23-3, SOT23-5, SOT-89, TO-92, SC-70

Flyback With Isolation Using TLV431 as Voltage Reference and Error Amplifier

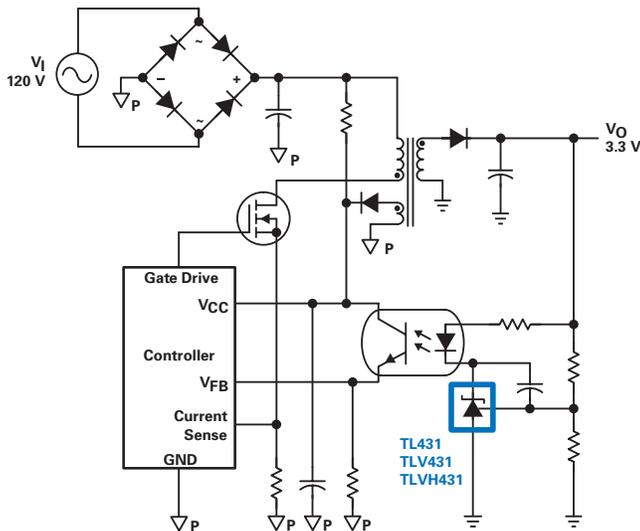

Benefits

- Multiple initial tolerances from 0.4% to 2%
- Three temperature ranges: including -40 to 125°C
- Alternate pinouts with TL432 and TLVH432 (for SOT23-3, SOT23-5 and SOT-89 packages) to accommodate different board layouts
 - **TL432**: same as TL431, but has different pinouts for SOT23-3 and SOT23-5
 - **TLVH432**: same as TLVH431, but has different pinouts for SOT23-3 and SOT-89
- SOT-89: best thermal performance
- SC-70: smallest plastic package with $\sim 40\%$ space savings vs. SOT23-3

Important Notice: The products and services of Texas Instruments Incorporated and its subsidiaries described herein are sold subject to TI's standard terms and conditions of sale. Customers are advised to obtain the most current and complete information about TI products and services before placing orders. TI assumes no liability for applications assistance, customer's applications or product designs, software performance, or infringement of patents. The publication of information regarding any other company's products or services does not constitute TI's approval, warranty or endorsement thereof.

The curving stream design, Technology for Innovators and the red/black banner are trademarks of Texas Instruments.