

TPS65090A

Frontend PMU With Switchmode Charger for 2-3 Cells In Series

Data Manual



PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Literature Number: SLVSBO6A
January 2013–Revised July 2013

Frontend PMU With Switchmode Charger for 2-3 Cells In Series

1 INTRODUCTION

1.1 FEATURES

- **Wide Input Voltage Charger/Power Path Management:**
 - V_{IN} Range From 6 V to 17 V
 - Up to 4 A Output Current on the Power Path
 - Switchmode Charger; up to 4 A Maximum Charge Current
 - JEITA Compliant Charging Control
 - Thermal Regulation, Safety Timers
 - 2 Temperature Sense Inputs
- **3 Step-Down Converters:**
 - High Efficiency over a wide Output Current Range
 - V_{IN} Range From 6 V to 17 V
 - 2 Fixed Output Voltages (5 V and 3.3 V)
 - Up to 5 A of Continuous Output Current
 - 1 Adjustable Output Voltage (between 1.0V and 5.0V)
 - Up to 4 A of Continuous Output Current
 - Output Voltage Accuracy $\pm 1\%$
 - Typical 30 μ A Quiescent Current per Converter
- **2 Always On LDO's:**
 - 2 Fixed Output Voltages (5 V and 3.3 V)
 - Output Voltage Accuracy $\pm 1\%$
 - Typical 10 μ A Quiescent Current per LDO
- **7 Current Limited Load Switches:**
 - One System Voltage Switch with 1 A Current Limit
 - One 5 V Switch with 200 mA Current Limit, reverse voltage protected
 - One 3.3 V Switch with 3 A Current Limit
 - Four 3.3 V Switches with 1 A Current Limit
 - All Switches Controlled by I²C Interface
- **I²C Interface**
 - Standard-mode (100 kHz) supported
 - Fast-mode (400 kHz) supported
 - Fast-mode Plus (1000 kHz) supported
 - High speed (3.4 MHz) supported
- **16 Channel 10 Bit A/D Converter**
- **Available in a 9 x 9-mm, VQFN-100 Package**

1.2 APPLICATIONS

- **Battery Powered Products using 2 to 3 Li-Cells in Series**
- **Notebook Computer**
- **Mobile PC's and Mobile Internet Devices**
- **Industrial Metering Equipment**
- **Personal Medical Products**

1.3 DESCRIPTION

The TPS65090A is a single chip Power Management ICs for portable applications consisting of a battery charger with power path management for a dual or triple Li-Ion or Li-Polymer cell battery pack. The charger can be directly connected to an external wall adapter. Three highly efficient step-down converters are targeted for providing a fixed 5 V system voltage, a fixed 3.3 V system voltage and an adjustable voltage rail. The step-down converters enter a low power mode at light load for maximum efficiency across the widest possible range of load currents. The step-down converters allow the use of small inductors and capacitors to achieve a small solution size. The TPS65090A also integrates two general purpose always on LDOs for powering circuit blocks which control the system while shut down. Each LDO operates with an input voltage range between 6 V and 17 V allowing them to be supplied from the wall adapter or directly from the main battery pack.

The device also has 7 load switches built-in. They can be used to control the power supply individually for certain circuit blocks in the application circuit. The current flowing through the load switches, as well as the output current of the step-down converters, the input current from the AC adaptor and the charge current is monitored and can be read out using the digital interface.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

2 DEVICE SPECIFICATION

2.1 ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
POWER PATH CONTROL				
Voltage range ⁽²⁾	VAC, VACS	-0.3	30	V
	ACP, ACN, ACS, BATG	-0.3	20	V
Differential Voltage	between ACP and ACN	-0.5	0.5	V
	between ACG and ACS	-0.3	7	V
CHARGER				
Voltage range ⁽²⁾	VSYS, VBAT, LC, SRP, SRN, STAT	-0.3	20	V
	FBC, TS1, TS2, VREFT	-0.3	7	V
	ENC	-0.3	3.6	V
Differential Voltage	between SRP and SRN	-0.5	0.5	V
	between CBC and LC	-0.3	7	V
DC-DC1				
Voltage range ⁽²⁾	VSYS1, L1	-0.3	20	V
	FB1, VDCDC1	-0.3	7	V
	EN1	-0.3	3.6	V
Differential Voltage	between CB1 and L1	-0.3	7	V
DC-DC2				
Voltage range ⁽²⁾	VSYS2, L2	-0.3	20	V
	FB2, VDCDC2	-0.3	3.6	V
	EN2	-0.3	3.6	V
Differential Voltage	between CB2 and L2	-0.3	7	V
DC-DC3				
Voltage range ⁽²⁾	VSYS3, L3	-0.3	20	V
	FB3, VDCDC3	-0.3	7	V
	EN3	-0.3	3.6	V
Differential Voltage	between CB3 and L3	-0.3	7	V
LDO1				
Voltage range ⁽²⁾	VSYS_L1	-0.3	20	V
	VLDO1, FB_L1	-0.3	7	V
LDO2				
Voltage range ⁽²⁾	VSYS_L2	-0.3	20	V
	VLDO2, FB_L2	-0.3	3.6	V
FET1				
Voltage range ⁽²⁾	INFET1, VFET1	-0.3	20	V
FET2				
Voltage range ⁽²⁾	INFET2, VFET2	-0.3	6	V
FET3				
Voltage range ⁽²⁾	INFET3, VFET3	-0.3	6	V
FET4				
Voltage range ⁽²⁾	INFET4, VFET4	-0.3	6	V
FET5				

(1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) All voltages are with respect to network ground terminal.

ABSOLUTE MAXIMUM RATINGS (continued)

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
Voltage range ⁽²⁾	INFET5, VFET5	–0.3	6	V
FET6				
Voltage range ⁽²⁾	INFET6, VFET6	–0.3	6	V
FET7				
Voltage range ⁽²⁾	INFET7, VFET7	–0.3	6	V
Digital Interface / Control				
Voltage range ⁽²⁾	SDAT, SCLK, IRQ, VCTRL, VCTRL2, VACG, VSYSG, VBATG	–0.3	7	V
	VREFADC, VREF	–0.3	3.6	V
GENERAL				
Temperature range	Operating junction, T _J	–40	150	°C
	Storage, T _{stg}	–65	150	°C
ESD rating ⁽³⁾	Human Body Model - (HBM)		2	kV
	Charge Device Model - (CDM)		0.5	kV

(3) ESD testing is performed according to the respective JESD22 JEDEC standard.

2.2 RECOMMENDED OPERATING CONDITIONS

	MIN	NOM	MAX	UNIT
POWER PATH CONTROL				
Supply voltage at VAC	6.0		17	V
Differential voltage between ACP and ACN	–0.2		0.2	V
CHARGER				
Supply voltage at VSYSC, VBAT	6.0		17	V
Differential voltage between SRP and SRN	–0.2		0.2	V
DCDC1				
Supply voltage at VSYS1	6.0		17	V
DCDC2				
Supply voltage at VSYS2	6.0		17	V
DCDC3				
Supply voltage at VSYS3	6.0		17	V
LDO1				
Supply voltage at VSYS_L1	6.0		17	V
LDO2				
Supply voltage at VSYS_L2	6.0		17	V
FET1				
Supply voltage at INFET1	5.0		17	V
FET2				
Supply voltage at INFET2	4.5		5.5	V
FET3				
Supply voltage at INFET3	3.0		5.5	V
FET4				
Supply voltage at INFET4	3.0		5.5	V
FET5				
Supply voltage at INFET5	3.0		5.5	V
FET6				
Supply voltage at INFET6	3.0		5.5	V

RECOMMENDED OPERATING CONDITIONS (continued)

	MIN	NOM	MAX	UNIT
FET7				
Supply voltage at INFET7	3.0		5.5	V
CONTROL				
Supply voltage at VCTRL2	3.0		5.5	V
GENERAL				
Operating free air temperature range, T_A	–40		85	°C
Operating junction temperature range, T_J	–40		125	°C

2.3 THERMAL INFORMATION

THERMAL METRIC ⁽¹⁾		TPS65090A	UNITS
		RVN	
		100 PINS	
θ_{JA}	Junction-to-ambient thermal resistance	24.8	°C/W
$\theta_{JC(top)}$	Junction-to-case(top) thermal resistance	5.6	
θ_{JB}	Junction-to-board thermal resistance	3.9	
Ψ_{JT}	Junction-to-top characterization parameter	0.1	
Ψ_{JB}	Junction-to-board characterization parameter	3.9	
$\theta_{JC(bottom)}$	Junction-to-case(bottom) thermal resistance	0.1	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

2.4 ELECTRICAL CHARACTERISTICS - POWER PATH CONTROL

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
VAC overvoltage disconnect		17	17.6	18.2	V
VAC overvoltage hysteresis			550		mV
VAC undervoltage lockout	V_{AC} voltage decreasing	5.0	5.5	6.0	V
VAC undervoltage lockout hysteresis			550		mV
Maximum input DPM current programming range		1000		4000	mA
($V_{ACP} - V_{ACN}$) voltage to maximum input DPM current gain			100		A / V
Input DPM current regulation	$V_{ACP} - V_{ACN}$, IACSET = 0	40	44	48	mV
	$V_{ACP} - V_{ACN}$, IACSET = 1	36	40	44	mV
Maximum battery discharge current comparator threshold	$V_{BAT} - V_{SRN}$, IBATSET = 0, $T_A = 25^\circ\text{C}$	17.5	20	21	mV
	$V_{BAT} - V_{SRN}$, IBATSET = 1, $T_A = 25^\circ\text{C}$	15	17.5	18.5	mV
VACS input impedance			1000		kΩ
VAC input impedance			25		kΩ
Gate drive current on ACG		12			μA
Gate drive current on BATG	turn on	500			μA
Gate drive current on BATG	turn off	25			mA
BATG turn off delay time after adapter is detected			30		ms
Quiescent current into VAC	charging enabled, $V_{AC} = 11.5\text{ V}$		2.5	5	mA
	charging disabled, $V_{AC} = 11.5\text{ V}$		1	1.5	mA
Leakage current into ACP and ACN	charging disabled			80	μA
V_{SUPP_L} Supplement threshold to turn on battery switch	$V_{SRN} - V_{ACN}$ rising	13	45	84	mV

ELECTRICAL CHARACTERISTICS - POWER PATH CONTROL (continued)

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _{SUPP} L _{HYS}	Supplement mode hysteresis to turn off battery switch	V _{SRN} - V _{ACN} falling		20		mV
I _{ACRC}	Reverse adapter current threshold	V _{ACN} - V _{ACP} rising		45		mV
V _{SLEEP} P	SLEEP mode threshold	V _{AC} - V _{SRN} falling	20	90	150	mV
V _{SLEEP} P _{HYS}	SLEEP mode hysteresis	V _{AC} - V _{SRN} rising		200		mV

2.5 ELECTRICAL CHARACTERISTICS - CHARGER

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
CHARGER - POWER						
V _{FBC}	Charger feedback voltage	VSET = 00, default for T ₀₁ and T ₄₀	1.98	2.0	2.02	V
		VSET = 01, default for T ₁₂	2.03	2.05	2.07	
		VSET = 10, default for T ₃₄	2.055	2.075	2.095	
		VSET = 11, default for T ₂₃	2.08	2.1	2.12	
Leakage current into FBC			0.1			μA
V _{FBCR}	Charger feedback voltage for automatic charge restart	VSET = 00, ENRECG = 1	1.925	1.950	1.975	V
		VSET = 01, ENRECG = 1	1.975	2.0	2.025	
		VSET = 10, ENRECG = 1	2.0	2.025	2.05	
		VSET = 11, ENRECG = 1	2.025	2.05	2.075	
I _{CHARGE}	Maximum charge current programming range		1000	4000		mA
(V _{SRP} - V _{SRN}) voltage to maximum charge current gain			100			A / V
I _{2C}	programmable charge current	ISET = 000	0			%
		ISET = 001	25			%
		ISET = 010	37.5			%
		ISET = 011, default for T ₁₂ and T ₃₄ battery temperature range	50			%
		ISET = 100	62.5			%
		ISET = 101	75			%
		ISET = 110	87.5			%
		ISET = 111, default for T ₂₃ battery temperature range	100			%
Charge current sense regulation voltage	V _{SRP} - V _{SRN} = 40 mV typical, T _J < 100 °C	38.5	40	42.5	mV	
	V _{SRP} - V _{SRN} = 20 mV typical, T _J < 100 °C	18.5	20	22.0		
	V _{SRP} - V _{SRN} = 4 mV typical, T _J < 100 °C	2.3	4	5.9		
minimum programmable charge current			100			mA
Precharge current			0.1 * I _{CHARGE}			
Termination current			0.1 * I _{CHARGE}			
Leakage current into SRN and SRP		V _{BAT} < 12 V	45			μA
Switching frequency			1360	1600	1840	kHz
R _{DS(on)}	High side switch on resistance		25			mΩ

ELECTRICAL CHARACTERISTICS - CHARGER (continued)

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
R _{DS(on)}	Low side switch on resistance			60		mΩ
CHARGER - CONTROL						
	Precharge timer		1600	1800	2000	s
	Fastcharge safety timer programming range		2		10	h
	Fastcharge safety timer accuracy				10%	
	I2C programmable values for fastcharge safety timer	FASTTIME = 000, default setting		2		h
		FASTTIME = 001		3		h
		FASTTIME = 010		4		h
		FASTTIME = 011		5		h
		FASTTIME = 100		6		h
		FASTTIME = 101		7		h
		FASTTIME = 110		8		h
		FASTTIME = 111		10		h
	Battery detection discharge timer			1		s
	Battery detection discharge current		5		20	mA
	Battery detection discharge current after timer fault			2		mA
V _{FBCL}	Battery detection discharge feedback voltage threshold for battery ok		1.43	1.45	1.47	V
	Battery feedback voltage threshold for precharge to fastcharge transition		1.43	1.45	1.47	V
	Battery detection charge timer			0.5		s
	Battery detection charge current sense regulation voltage	V _{SRP} - V _{SRN} = 2 mV typical, T _J < 100 °C	0.5	2	3.8	mV
	Battery detection charge feedback voltage threshold for battery ok	VSET = 00	1.925	1.95	1.975	V
		VSET = 01	1.975	2.0	2.025	
		VSET = 10	2.0	2.025	2.05	
		VSET = 11	2.025	2.05	2.075	
	Minimum battery feedback voltage for battery good detection	voltage at FBC increasing	1.44	1.5	1.54	V
	Maximum battery feedback voltage for battery good detection	voltage at FBC increasing	2.18	2.25	2.28	V
	Battery cell temperature measurement, ratio of V _{TS1,2} compared to V _{REFTS} , I2C programming option for T ₁	sensor temperature is -10°C, T _{SET} = 000	71.9	72.4	72.9	%
	Voltage ratio threshold hysteresis	sensor temperature is -10°C, voltage decreasing		0.2		%
T ₁	Battery cell temperature measurement, ratio of V _{TS1,2} compared to V _{REFTS}	default value, Sensor temperature is 0°C, T _{SET} = 001	70.4	71.0	71.5	%
	Voltage ratio threshold hysteresis	sensor temperature is 0°C, voltage decreasing		0.2		%
T ₂	Battery cell temperature measurement, ratio of V _{TS1,2} compared to V _{REFTS}	default value, Sensor temperature is 10°C, T _{SET} = 010	68.1	68.7	69.2	%
	Voltage ratio threshold hysteresis	sensor temperature is 10°C, voltage decreasing		0.4		%
	Battery cell temperature measurement, ratio of V _{TS1,2} compared to V _{REFTS} , I2C programming option for T ₂	sensor temperature is 15°C, T _{SET} = 011	67.0	67.4	67.9	%
	Voltage ratio threshold hysteresis	sensor temperature is 15°C, voltage decreasing		0.4		%

ELECTRICAL CHARACTERISTICS - CHARGER (continued)

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
	Battery cell temperature measurement, ratio of $V_{TS1,2}$ compared to V_{REFTS} , I2C programming option for T_3	sensor temperature is 40°C, $T_{SET} = 100$	59.3	59.7	60.1	%
	Voltage ratio threshold hysteresis	sensor temperature is 40°C, voltage increasing		0.9		%
T_3	Battery cell temperature measurement, ratio of $V_{TS1,2}$ compared to V_{REFTS}	default value, Sensor temperature is 45°C, $T_{SET} = 101$	57.1	57.6	57.9	%
	Voltage ratio threshold hysteresis	sensor temperature is 45°C, voltage increasing		0.9		%
	Battery cell temperature measurement, ratio of $V_{TS1,2}$ compared to V_{REFTS} , I2C programming option for T_3 or T_4	sensor temperature is 50°C, $T_{SET} = 110$	54.7	55.2	55.8	%
	Voltage ratio threshold hysteresis	sensor temperature is 50°C, voltage increasing		1.1		%
T_4	Battery cell temperature measurement, ratio of $V_{TS1,2}$ compared to V_{REFTS}	default value, Sensor temperature is 60°C, $T_{SET} = 111$	49.6	50.1	50.5	%
	Voltage ratio threshold hysteresis	sensor temperature is 60°C, voltage increasing		1.1		%
	Output voltage at V_{REFT}	internally connected to $VLDO2$		3.3		V
	Output impedance of V_{REFT}			4		kΩ
	Quiescent current into $VBAT$	charging active			25	μA
	Quiescent current into $VBAT$	charging suspended			150	μA
V_{IL}	ENC input low voltage				0.4	V
V_{IH}	ENC input high voltage		1.2			V
	ENC input current	Clamped on GND or 3.3V		0.01	0.1	μA
	Charge current derating starting temperature	junction temperature increasing		100		°C
	Charge current derating starting voltage	V_{SYS} decreasing	6.7	7.3	7.6	V
	Overtemperature protection		125	140	150	°C
	Overtemperature hysteresis			20		°C

2.6 ELECTRICAL CHARACTERISTICS - DCDC CONVERTERS

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
DCDC1 - POWER						
	Output voltage	Power save mode disabled	5.0	5.05	5.125	V
	Switch valley current limit	$T_A = 25^\circ\text{C}$	5500			mA
	High side switch on resistance			20		mΩ
	Low side switch on resistance			20		mΩ
	Maximum line regulation			0.5		%
	Maximum load regulation			0.5		%
	Output auto discharge resistance			300	400	Ω
	FB1 input impedance	$V_{EN1} = 1$		1		MΩ
	Shutdown current into V_{SYS1}	$V_{SYS1} = 7.2\text{ V}$, $EN1 = 0$			1	μA
DCDC1 - CONTROL						
V_{IL}	EN1 input low voltage				0.4	V
V_{IH}	EN1 input high voltage		1.2			V
	EN1 input current	Clamped on GND or 3.3 V		0.01	0.1	μA

ELECTRICAL CHARACTERISTICS - DCDC CONVERTERS (continued)

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Overtemperature protection				140		°C
Overtemperature hysteresis				20		°C
DCDC2 - POWER						
Output voltage		Power save mode disabled	3.3	3.333	3.383	V
Switch valley current limit		$T_A = 25^\circ\text{C}$	5500			mA
High side switch on resistance				20		mΩ
Low side switch on resistance				20		mΩ
Maximum line regulation				0.5		%
Maximum load regulation				0.5		%
Output auto discharge resistance				300	400	Ω
FB2 input impedance		$V_{EN2} = 1$		1		MΩ
Shutdown current into VSYS2		$V_{SYS2} = 7.2\text{ V}$, $EN2 = 0$			1	μA
DCDC2 - CONTROL						
V_{IL}	EN2 input low voltage				0.4	V
V_{IH}	EN2 input high voltage		1.2			V
EN2 input current		Clamped on GND or 3.3 V		0.01	0.1	μA
Overtemperature protection				140		°C
Overtemperature hysteresis				20		°C
DCDC3 - POWER						
Feedback voltage			792	800	808	mV
Switch valley current limit		$T_A = 25^\circ\text{C}$	4200			mA
High side switch on resistance				20		mΩ
Low side switch on resistance				20		mΩ
Maximum line regulation				0.5		%
Maximum load regulation				0.5		%
Output auto discharge resistance				300	400	Ω
Leakage current into FB3					0.1	μA
Shutdown current into VSYS3		$V_{SYS3} = 7.2\text{ V}$, $EN3 = 0$			1	μA
DCDC3 - CONTROL						
V_{IL}	EN3 input low voltage				0.4	V
V_{IH}	EN3 input high voltage		1.2			V
EN3 input current		Clamped on GND or 3.3 V		0.01	0.1	μA
Overtemperature protection				140		°C
Overtemperature hysteresis				20		°C

2.7 ELECTRICAL CHARACTERISTICS - LINEAR REGULATORS

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
LDO1						
Output voltage		$I_{OUTLDO1} = 1\text{ mA}$	4.90	4.95	5.0	V
LDO1 current limit		$T_A = 25^\circ\text{C}$	30	50	120	mA
LDO1 maximum output current		DCDC1 active (bypass switch turned on), $V_{SYS} = 7.5\text{ V}$		120		mA
Maximum line regulation				0.5		%

ELECTRICAL CHARACTERISTICS - LINEAR REGULATORS (continued)

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Maximum load regulation			0.5		%
FB_L1 input impedance			1		MΩ
Quiescent current into VSYS_L1 and VSYS_L2	DCDC1 and DCDC2 are enabled			35	μA
Overtemperature protection			140		°C
Overtemperature hysteresis			20		°C
LDO2					
Output voltage	$I_{OUTLDO2} = 1 \text{ mA}$	3.233	3.267	3.3	V
LDO2 current limit	$T_A = 25^\circ\text{C}$	30	50	120	mA
LDO2 maximum output current	DCDC2 active (bypass switch turned on), $V_{SYS} = 7.5 \text{ V}$		120		mA
Maximum line regulation			0.5		%
Maximum load regulation			0.5		%
FB_L2 input impedance			1		MΩ
Quiescent current into VSYS_L2 and VSYS_L1	DCDC1 and DCDC2 are enabled			35	μA
Overtemperature protection			140		°C
Overtemperature hysteresis			20		°C

2.8 ELECTRICAL CHARACTERISTICS - LOAD SWITCHES

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
FET1					
Overcurrent detect threshold	$T_A = 25^\circ\text{C}$	1000		1200	mA
Switch on resistance				120	mΩ
Output auto discharge resistance			800		Ω
Maximum output voltage slew rate after turn on		0.1	0.5	1	V / μs
Switch current limit - timeout	multiplier set to 1, WTFET1 = 00	200		250	μs
Switch current limit - timeout	multiplier set to 4, WTFET1 = 01	800		1000	μs
Switch current limit - timeout	multiplier set to 8, WTFET1 = 10	1600		2000	μs
Switch current limit - timeout	multiplier set to 16, WTFET1 = 11	3200		4000	μs
Leakage current into INFET1	FET1 disabled, $V_{FET1} = 0 \text{ V}$		1		μA
FET2					
Overcurrent detect threshold	$T_A = 25^\circ\text{C}$	200		240	mA
Switch on resistance				500	mΩ
Output auto discharge resistance			300		Ω
Maximum output voltage slew rate after turn on		0.1	0.5	1	V / μs
Switch current limit - timeout	multiplier set to 1, WTFET2 = 00	200		250	μs
Switch current limit - timeout	multiplier set to 4, WTFET2 = 01	800		1000	μs
Switch current limit - timeout	multiplier set to 8, WTFET2 = 10	1600		2000	μs
Switch current limit - timeout	multiplier set to 16, WTFET2 = 11	3200		4000	μs
Shutdown current into INFET2	FET2 disabled, $V_{FET2} = 0 \text{ V}$		5		μA
Reverse leakage current	FET disabled, $V_{FET2} > V_{INFET2}$		10		μA
FET3					
Overcurrent detect threshold	$T_A = 25^\circ\text{C}$	3000		3600	mA
Switch on resistance				45	mΩ

ELECTRICAL CHARACTERISTICS - LOAD SWITCHES (continued)

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output auto discharge resistance			300		Ω
Maximum output voltage slew rate after turn on		0.1	0.5	1	V / μs
Switch current limit - timeout	multiplier set to 1, WTFET3 = 00	200		250	μs
Switch current limit - timeout	multiplier set to 4, WTFET3 = 01	800		1000	μs
Switch current limit - timeout	multiplier set to 8, WTFET3 = 10	1600		2000	μs
Switch current limit - timeout	multiplier set to 16, WTFET3 = 11	3200		4000	μs
Leakage current into INFET3	FET3 disabled, V _{FET3} = 0 V		3		μA
FET4					
Overcurrent detect threshold	T _A = 25°C	1000		1200	mA
Switch on resistance				80	mΩ
Output auto discharge resistance			300		Ω
Maximum output voltage slew rate after turn on		0.1	0.5	1	V / μs
Switch current limit - timeout	multiplier set to 1, WTFET4 = 00	200		250	μs
Switch current limit - timeout	multiplier set to 4, WTFET4 = 01	800		1000	μs
Switch current limit - timeout	multiplier set to 8, WTFET4 = 10	1600		2000	μs
Switch current limit - timeout	multiplier set to 16, WTFET4 = 11	3200		4000	μs
Leakage current into INFET4	FET4 disabled, V _{FET4} = 0 V		1		μA
FET5					
Overcurrent detect threshold	T _A = 25°C	1000		1200	mA
Switch on resistance				80	mΩ
Output auto discharge resistance			300		Ω
Maximum output voltage slew rate after turn on		0.1	0.5	1	V / μs
Switch current limit - timeout	multiplier set to 1, WTFET5 = 00	200		250	μs
Switch current limit - timeout	multiplier set to 4, WTFET5 = 01	800		1000	μs
Switch current limit - timeout	multiplier set to 8, WTFET5 = 10	1600		2000	μs
Switch current limit - timeout	multiplier set to 16, WTFET5 = 11	3200		4000	μs
Leakage current into INFET5	FET5 disabled, V _{FET5} = 0 V		1		μA
FET6					
Overcurrent detect threshold	T _A = 25°C	1000		1200	mA
Switch on resistance				80	mΩ
Output auto discharge resistance			300		Ω
Maximum output voltage slew rate after turn on		0.1	0.5	1	V / μs
Switch current limit - timeout	multiplier set to 1, WTFET6 = 00	200		250	μs
Switch current limit - timeout	multiplier set to 4, WTFET6 = 01	800		1000	μs
Switch current limit - timeout	multiplier set to 8, WTFET6 = 10	1600		2000	μs
Switch current limit - timeout	multiplier set to 16, WTFET6 = 11	3200		4000	μs
Leakage current into INFET6	FET6 disabled, V _{FET6} = 0 V		1		μA
FET7					
Overcurrent detect threshold	T _A = 25°C	1000		1200	mA
Switch on resistance				80	mΩ
Output auto discharge resistance			300		Ω
Maximum output voltage slew rate after turn on		0.1	0.5	1	V / μs
Switch current limit - timeout	multiplier set to 1, WTFET7 = 00	200		250	μs
Switch current limit - timeout	multiplier set to 4, WTFET7 = 01	800		1000	μs
Switch current limit - timeout	multiplier set to 8, WTFET7 = 10	1600		2000	μs

ELECTRICAL CHARACTERISTICS - LOAD SWITCHES (continued)

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Switch current limit - timeout	multiplier set to 16, WTFET7 = 11	3200		4000	μs
Leakage current into INFET7	FET7 disabled, $V_{FET7} = 0$ V		1		μA

2.9 ELECTRICAL CHARACTERISTICS - CONTROL

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
SYSTEM - CONTROL					
VBATG, VACG, VSYSG, IRQ output low voltage	$I_{VxxxGL} = 1$ mA		0.04	0.4	V
VBATG, VACG, VSYSG, IRQ output leakage current			0.01	0.4	μA
STAT output low voltage	$I_{STAT} = 1$ mA		0.04	0.4	V
STAT output low voltage	$I_{STAT} = 5$ mA			0.6	V
STAT output leakage current			0.01	0.1	μA
System under voltage lockout threshold	V_{SYS} voltage decreasing	5.5	5.6	5.7	V
System under voltage lockout threshold hysteresis			300		mV
LDO under voltage lockout threshold	V_{SYS} voltage decreasing	4.4	4.6	4.7	V
LDO under voltage lockout threshold hysteresis			300		mV
V_{IL} SDA, SCL input low voltage				0.4	V
V_{IH} SDA, SCL input high voltage		1.2			V
SDA, SCL input current	Clamped on GND or 3.3 V		0.01	0.3	μA
SDA output low voltage	$I_{SDA} = 5$ mA		0.04	0.4	V
AD - CONVERTER					
ADC resolution			10		Bits
Differential linearity error			±1		LSB
Offset error			1	5	LSB
Offset error, voltage				12.7	mV
Gain error			±8		LSB
Sampling time			150		μs
Conversion time			20		μs
Wait time after enable	Time needed to stabilize the internal voltages			10	ms
Quiescent current, ADC enabled by I ² C	includes current needed for I2C block		500		μA
AD - CONVERTER - MEASUREMENT RANGES					
Voltage on VAC		0		17	V
Battery voltage VBAT		0		17	V
Input current IAC	$V_{ACP} - V_{ACN}$ is measured	0		33	mV
Battery charge current IBAT	$V_{SRP} - V_{SRN}$ is measured	0		40	mV
DCDC1 output current IDCDC1		0		4	A
DCDC2 output current IDCDC2		0		4	A
DCDC3 output current IDCDC3		0		4	A
FET1 output current IFET1		0		1.1	A
FET2 output current IFET2		0		220	mA
FET3 output current IFET3		0		3.3	A
FET4 output current IFET4		0		1.1	A

ELECTRICAL CHARACTERISTICS - CONTROL (continued)

over recommended free-air temperature range and over recommended input voltage range (typical at an ambient temperature range of 25°C) (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
FET5 output current IFET5		0		1.1	A
FET6 output current IFET6		0		1.1	A
FET7 output current IFET7		0		1.1	A
AD - CONVERTER - SIGNAL CONDITIONING					
Voltage sense error referenced to maximum value				2	%
Current sense error referenced to maximum value for IAC and IBAT				20	%
Current sense error referenced to maximum value for DCDC converter currents	measurements at VSYS > 7.2 V, low side switch duty cycle at DCDC1-3 > 30%			15	%
Current sense error referenced to maximum value for Load switch currents				10	%

2.10 ELECTRICAL CHARACTERISTICS - I²C INTERFACE TIMING⁽¹⁾

over recommended free-air temperature range and over recommended input voltage range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	MAX	UNIT
f _(SCL)	Standard-mode		100	kHz
	Fast-mode		400	kHz
	Fast-mode Plus		1000	kHz
	High-speed mode, C _b – 100 pF max		3.4	MHz
	High-speed mode, C _b – 400 pF max ⁽²⁾		1.7	MHz
t _{BUF}	Standard-mode	4.7		μs
	Fast-mode	1.3		μs
	Fast-mode Plus	0.5		μs
t _{HD; STA}	Standard-mode	4		μs
	Fast-mode	600		ns
	Fast-mode Plus	260		ns
	High-speed mode	160		ns
t _{LOW}	Standard-mode	4.7		μs
	Fast-mode	1.3		μs
	Fast-mode Plus	0.5		μs
	High-speed mode, C _b – 100 pF max	160		ns
	High-speed mode, C _b – 400 pF max ⁽²⁾	320		ns
t _{HIGH}	Standard-mode	4		μs
	Fast-mode	600		ns
	Fast-mode Plus	260		ns
	High-speed mode, C _b – 100 pF max	60		ns
	High-speed mode, C _b – 400 pF max ⁽²⁾	120		ns
t _{SU; STA}	Standard-mode	4.7		μs
	Fast-mode	600		ns
	Fast-mode Plus	260		ns
	High-speed mode	160		ns

(1) All values referred to V_{IH} min and V_{IH} max levels.

(2) For bus line loads C_b between 100 pF and 400 pF, the timing parameters must be linearly interpolated.

ELECTRICAL CHARACTERISTICS - I²C INTERFACE TIMING⁽¹⁾ (continued)

over recommended free-air temperature range and over recommended input voltage range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	MAX	UNIT
t _{SU; DAT}	Data setup time	Standard-mode	250		ns
		Fast-mode	100		ns
		Fast-mode Plus	50		ns
		High-speed mode	10		ns
t _{HD; DAT}	Data hold time	Standard-mode	1	3450	ns
		Fast-mode	1	900	ns
		Fast-mode Plus	1		ns
		High-speed mode, C _b – 100 pF max	1 ⁽³⁾	70	ns
		High-speed mode, C _b – 400 pF max ⁽²⁾	1 ⁽³⁾	150	ns
t _{rCL}	Rise time of SCL signal	Standard-mode		1000	ns
		Fast-mode	20	300	ns
		Fast-mode Plus		120	ns
		High-speed mode, C _b – 100 pF max	10	40	ns
		High-speed mode, C _b – 400 pF max ⁽²⁾	20	80	ns
t _{rCL1}	Rise time of SCL signal after a repeated START condition and after an acknowledge bit	Standard-mode		1000	ns
		Fast-mode	20	300	ns
		Fast-mode Plus		120	ns
		High-speed mode, C _B – 100 pF max	10	80	ns
		High-speed mode, C _B – 400 pF max ⁽²⁾	20	160	ns
t _{fCL}	Fall time of SCL signal	Standard-mode		300	ns
		Fast-mode	20 x (V _{DD} / 5.5 V)	300	ns
		Fast-mode Plus	20 x (V _{DD} / 5.5 V)	120	ns
		High-speed mode, C _b – 100 pF max	10	40	ns
		High-speed mode, C _b – 400 pF max ⁽⁴⁾	20	80	ns
t _{rDA}	Rise time of SDA signal	Standard-mode		1000	ns
		Fast-mode	20	300	ns
		Fast-mode Plus		120	ns
		High-speed mode, C _b – 100 pF max	10	80	ns
		High-speed mode, C _b – 400 pF max ⁽⁴⁾	20	160	ns
t _{fDA}	Fall time of SDA signal	Standard-mode		300	ns
		Fast-mode	20 x (V _{DD} / 5.5 V)	300	ns
		Fast-mode Plus	20 x (V _{DD} / 5.5 V)	120	ns
		High-speed mode, C _b – 100 pF max	10	80	ns
		High-speed mode, C _b – 400 pF max ⁽⁴⁾	20	160	ns
t _{SU; STO}	Setup time for STOP condition	Standard-mode	4		μs
		Fast-mode	600		ns
		Fast-mode Plus	260		ns
		High-speed mode	160		ns
C _b	Capacitive load for SDA and SCL			400	pF

(3) A device must internally provide a data hold time to bridge the undefined part between V_{IH} and V_{IL} of the falling edge of the SCLH signal. An input circuit with a threshold as low as possible for the falling edge of the SCLH signal minimizes this hold time.

(4) For bus line loads C_b between 100 pF and 400 pF, the timing parameters must be linearly interpolated.

2.11 PIN ASSIGNMENTS

**RVN PACKAGE
(TOP VIEW)**

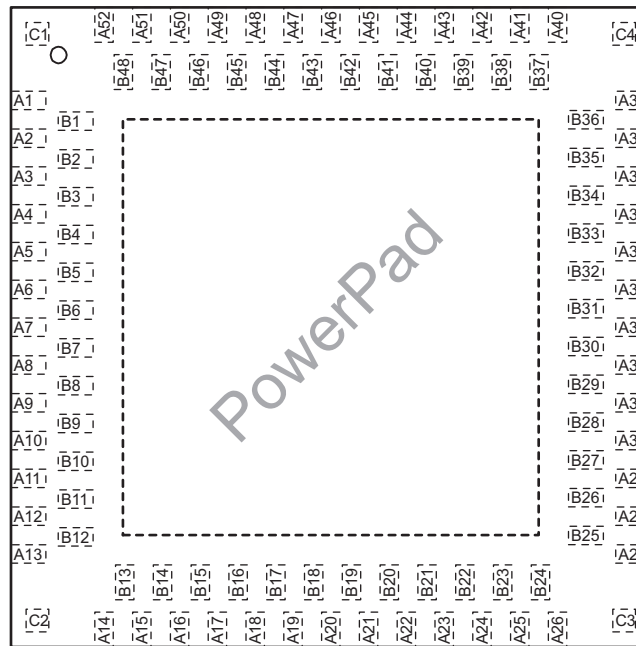


Table 2-1. Pin Functions

NAME	Pin NO.	I/O	DESCRIPTION
POWER PATH CONTROL			
VAC	A13	I	AC adaptor supply input for charger control
VACS	A14	I	AC adaptor sense input for the charger
ACG	A51	O	Gate connection for AC adaptor input switches
ACS	B48		Source connection for AC adaptor input switches
ACP	B47	I	Shunt resistor sense connection for input current sensing
ACN	A50	I	Shunt resistor sense connection for input current sensing
BATG	A2	O	Gate connection for the battery switch
CHARGER			
VSYS	A3, A4, B3	I	Switchmode battery charger step down converter supply voltage
LC	A5, B4, B5		Inductor connection for switchmode battery charger step down converter
PGNDC	A6, B6		
CBC	B2		Bootstrap capacitor connection for charger step down converter
FBC	A52	I	Voltage feedback input for charger step down converter. Must be connected to an external feedback divider to program charge voltage.
VBAT	A15	I	Battery sense connection
SRP	A1	I	Shunt resistor connection for battery charge current sensing
SRN	B1	I	Shunt resistor connection for battery charge current sensing
ENC	A41	I	Enable input for charger (1: enabled, 0: disabled), must be connected to a valid logic signal
VREFT	A25	I	Reference voltage output for temperature measurements
TS1	A24	I	Temperature sensor input for temperature sensor 1
TS2	B23	I	Temperature sensor input for temperature sensor 2
VACG	A39	O	VAC good pin, open drain (1, high impedance : voltage good; 0 : voltage not available)
VSYSG	B36	O	VSYS good pin, open drain (1, high impedance : voltage good; 0 : voltage not available)


Table 2-1. Pin Functions (continued)

NAME	Pin NO.	I/O	DESCRIPTION
VBATG	A38	O	VBAT good pin, open drain (1, high impedance : voltage good; 0 : voltage not available), pull up voltage should not be higher than voltage connected to VCTRL2
STAT	B13	O	Charge status pin, open drain (charge in progress, charge complete, sleep mode, fault)
DCDC1			
VSYS1	A46, A47, B43	I	Supply voltage input for DCDC1 step down converter
L1	A45, B41, B42		Inductor connection for DCDC1 step down converter
PGND1	A43, A44, B40		
CB1	B44		Bootstrap capacitor connection for DCDC1
FB1	B37	I	Output voltage sense input for DCDC1
VDCDC1	A48	I	Output voltage connection of DCDC1
EN1	B38	I	Enable input for DCDC1 (1: enabled, 0: disabled), must be connected to a valid logic signal
DCDC2			
VSYS2	A19, A20, B18	I	Supply voltage input for DCDC2 step down converter
L2	A21, B19, B20		Inductor connection for DCDC2 step down converter
PGND2	A22, A23, B21, B22		
CB2	B17		Bootstrap capacitor connection for DCDC2
FB2	B24	I	Output voltage sense input for DCDC2
VDCDC2	A18	I	Output voltage connection of DCDC2
EN2	A42	I	Enable input for DCDC2 (1: enabled, 0: disabled), must be connected to a valid logic signal
DCDC3			
VSYS3	A10, A11, B10, B11	I	Supply voltage input for DCDC3 step down converter
L3	A9, B8, B9		Inductor connection for DCDC3 step down converter
PGND3	A7, A8, B7		
CB3	A12		Bootstrap capacitor connection for DCDC3
FB3	B14	I	Output voltage feedback input for DCDC3, a resistive feedback divider must be connected
VDCDC3	A16	I	Output voltage sense input for DCDC3
EN3	A26	I	Enable input for DCDC3 (1: enabled, 0: disabled), must be connected to a valid logic signal
LDO1			
VSYS_L1	A49	I	Supply voltage input for LDO1 linear regulator
VLDO1	B45	O	Output of the LDO1 linear regulator
FB_L1	B46	I	Output voltage sense input for LDO1
LDO2			
VSYS_L2	A17	I	Supply voltage input for LDO2 linear regulator
VLDO2	B16	O	Output of the LDO2 linear regulator
FB_L2	B15	I	Output voltage sense input for LDO2
FET1			
INFET1	B28	I	Supply voltage input for load switch FET1, connect to GND, if not used
VFET1	A30	O	Output of load switch FET1, leave unconnected if not used
FET2			
INFET2	B29	I	Supply voltage input for load switch FET2, connect to GND, if not used
VFET2	A31	O	Output of load switch FET2, leave unconnected if not used

Table 2-1. Pin Functions (continued)

NAME	Pin NO.	I/O	DESCRIPTION
FET3			
INFET3	A34, B31	I	Supply voltage input for load switch FET3, connect to GND, if not used
VFET3	A32, B30	O	Output of load switch FET3, leave unconnected if not used
FET4			
INFET4	B34	I	Supply voltage input for load switch FET4, connect to GND, if not used
VFET4	A37	O	Output of load switch FET4, leave unconnected if not used
FET5			
INFET5	B33	I	Supply voltage input for load switch FET5, connect to GND, if not used
VFET5	A36	O	Output of load switch FET5, leave unconnected if not used
FET6			
INFET6	B32	I	Supply voltage input for load switch FET6, connect to GND, if not used
VFET6	A35	O	Output of load switch FET6, leave unconnected if not used
FET7			
INFET7	B27	I	Supply voltage input for load switch FET7, connect to GND, if not used
VFET7	A29	O	Output of load switch FET7, leave unconnected if not used
Digital Interface / Control			
SDA	A27	I/O	Data line for the I2C interface
SCL	B25	I/O	Clock input for the I2C interface
IRQ	B12	O	Interrupt output, open drain, (1, high impedance : no interrupt; 0 : interrupt) details on events available via I2C
AGND	A33		Analog ground
VCTRL	B39	O	Internal control supply decoupling capacitor connection
VREF	B35	O	Reference voltage decoupling capacitor connection
VREFADC	B26	O	ADC reference voltage decoupling capacitor connection
VCTRL2	A28		Not used, must be connected to either VLDO2 or VCTRL
GND	A40		Logic ground
PGND	C1, C2, C3, C4		internally connected to PowerPAD™
PowerPAD™			Must be soldered to achieve appropriate power dissipation. Must be connected to PGND.

FUNCTIONAL BLOCK DIAGRAM (TPS65090A)

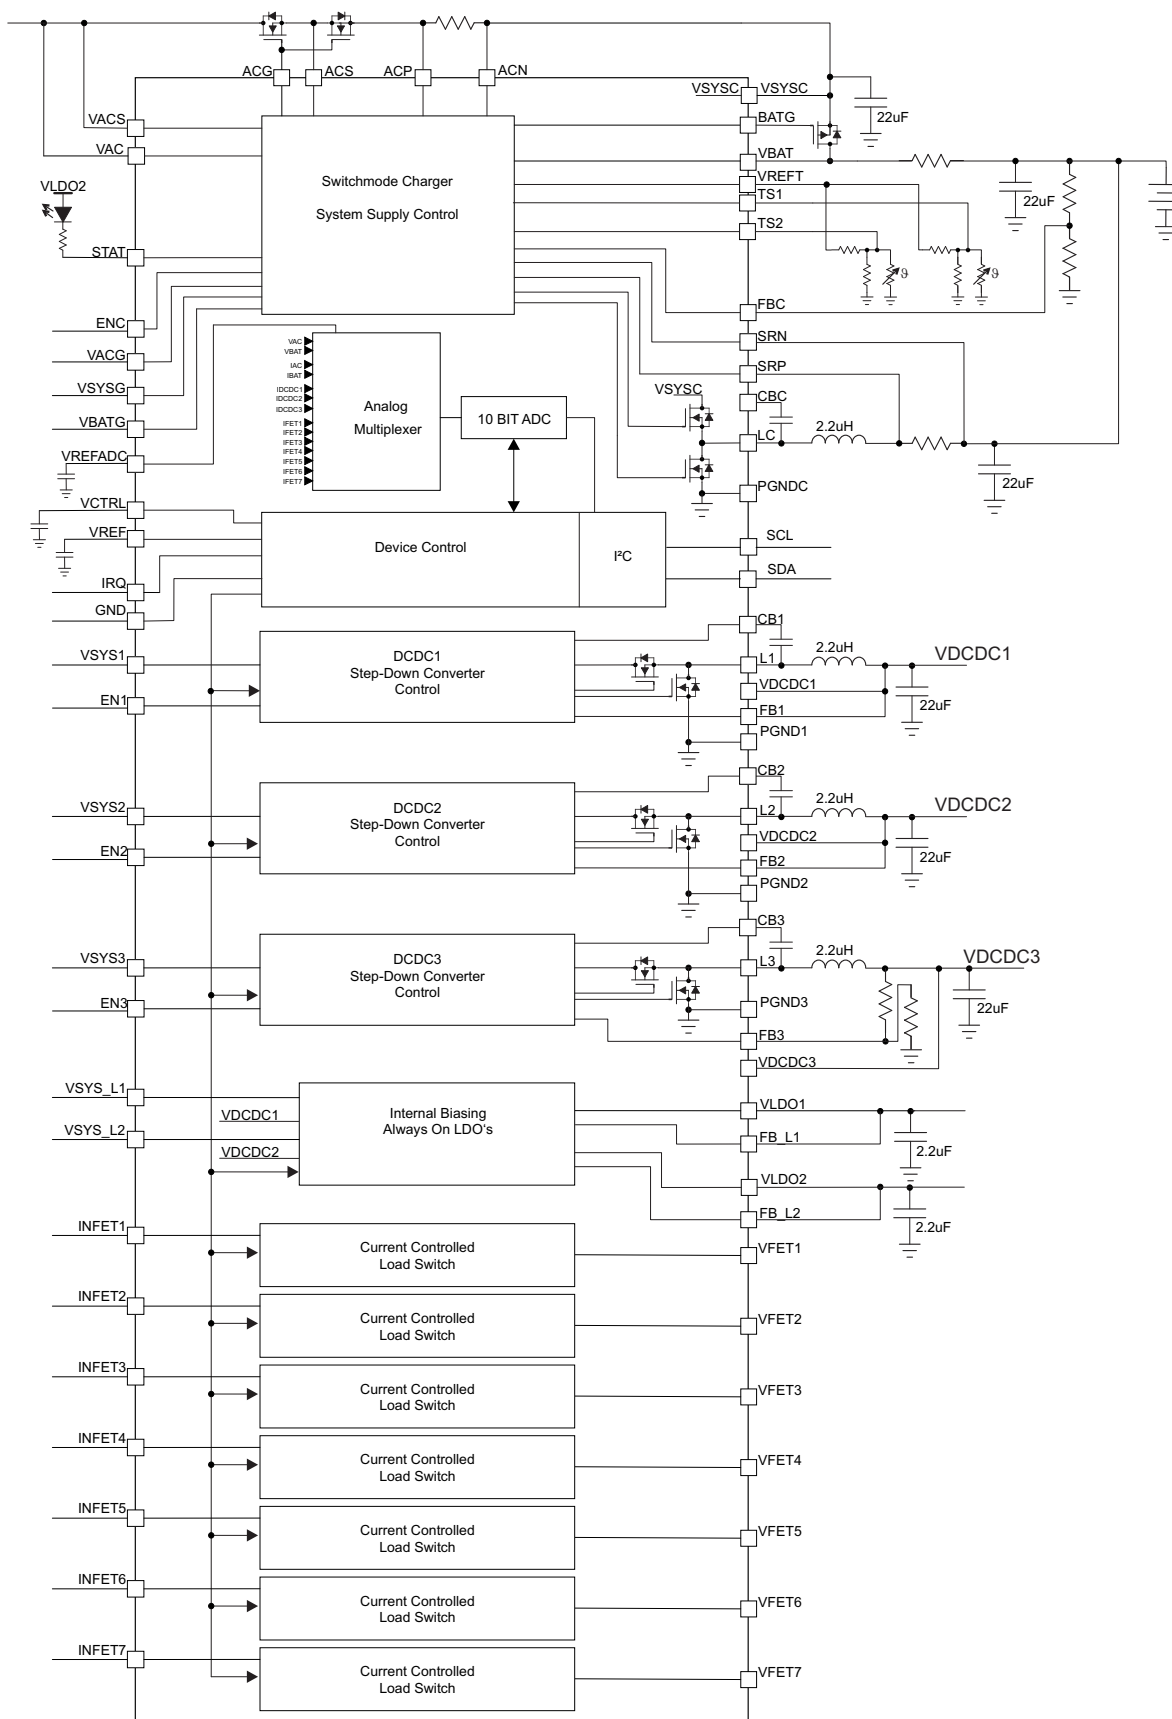

2.12 TYPICAL CHARACTERISTICS

Table 2-2. TABLE OF GRAPHS

	DESCRIPTION	REFERENCE
Efficiency	vs Output current, DCDC1, $V_{OUT} = 5\text{ V}$	Figure 2-1
	vs Output current, DCDC2, $V_{OUT} = 3.3\text{ V}$	Figure 2-1
	vs Output current, DCDC3, $V_{OUT} = 1.0\text{ V}$	Figure 2-3
	vs Output current, DCDC3, $V_{OUT} = 1.35\text{ V}$	Figure 2-4
	vs Output current, DCDC3, $V_{OUT} = 1.8\text{ V}$	Figure 2-5
	vs Output current, DCDC3, $V_{OUT} = 3.3\text{ V}$	Figure 2-6
	vs Output current, DCDC3, $V_{OUT} = 4.0\text{ V}$	Figure 2-7
	vs Output current, DCDC3, $V_{OUT} = 5.0\text{ V}$	Figure 2-8
Efficiency	vs Output current, Charger, $V_{OUT} = 8.4\text{ V}$	Figure 2-9
	vs Output current, Charger, $V_{OUT} = 12.6\text{ V}$	Figure 2-10
Efficiency	vs Input voltage, DCDC1, $V_{OUT} = 5\text{ V}$	Figure 2-11
	vs Input voltage, DCDC2, $V_{OUT} = 3.3\text{ V}$	Figure 2-12
	vs Input voltage, DCDC3, $V_{OUT} = 1.0\text{ V}$	Figure 2-13
	vs Input voltage, DCDC3, $V_{OUT} = 1.35\text{ V}$	Figure 2-14
	vs Input voltage, DCDC3, $V_{OUT} = 1.8\text{ V}$	Figure 2-15
	vs Input voltage, DCDC3, $V_{OUT} = 3.3\text{ V}$	Figure 2-16
	vs Input voltage, DCDC3, $V_{OUT} = 4.0\text{ V}$	Figure 2-17
	vs Input voltage, DCDC3, $V_{OUT} = 5.0\text{ V}$	Figure 2-18
Efficiency	vs Battery voltage, Charger, $I_{OUT} = 1.0\text{ A}$	Figure 2-19
	vs Battery voltage, Charger, $I_{OUT} = 2.0\text{ A}$	Figure 2-20
	vs Battery voltage, Charger, $I_{OUT} = 3.0\text{ A}$	Figure 2-21
	vs Battery voltage, Charger, $I_{OUT} = 4.0\text{ A}$	Figure 2-22
Switching frequency	vs Output current, DCDC1, $V_{OUT} = 5\text{ V}$	Figure 2-23
	vs Output current, DCDC2, $V_{OUT} = 3.3\text{ V}$	Figure 2-24
	vs Output current, DCDC3, $V_{OUT} = 1.35\text{ V}$	Figure 2-25
	vs Input voltage, DCDC1, $V_{OUT} = 5\text{ V}$	Figure 2-26
	vs Input voltage, DCDC2, $V_{OUT} = 3.3\text{ V}$	Figure 2-27
	vs Input voltage, DCDC3, $V_{OUT} = 1.35\text{ V}$	Figure 2-28
Inductor current ripple	vs Output current, DCDC1, $V_{OUT} = 5\text{ V}$	Figure 2-29
	vs Output current, DCDC2, $V_{OUT} = 3.3\text{ V}$	Figure 2-30
	vs Output current, DCDC3, $V_{OUT} = 1.35\text{ V}$	Figure 2-31
	vs Input voltage, DCDC1, $V_{OUT} = 5\text{ V}$	Figure 2-32
	vs Input voltage, DCDC2, $V_{OUT} = 3.3\text{ V}$	Figure 2-33
	vs Input voltage, DCDC3, $V_{OUT} = 1.35\text{ V}$	Figure 2-34

Table 2-2. TABLE OF GRAPHS (continued)

	DESCRIPTION	REFERENCE
Waveforms	Load transient response, DCDC1, $V_{IN} = 11.5\text{ V}$, load change from 400 mA to 5 A	Figure 2-35
	Load transient response, DCDC1, $V_{IN} = 15\text{ V}$, load change from 400 mA to 5 A	Figure 2-36
	Load transient response, DCDC2, $V_{IN} = 11.5\text{ V}$, load change from 400 mA to 5 A	Figure 2-37
	Load transient response, DCDC2, $V_{IN} = 15\text{ V}$, load change from 400 mA to 5 A	Figure 2-38
	Load transient response, DCDC3, $V_{OUT} = 1.35\text{ V}$, $V_{IN} = 11.5\text{ V}$, load change from 400 mA to 4.4 A	Figure 2-39
	Load transient response, DCDC3, $V_{OUT} = 1.35\text{ V}$, $V_{IN} = 15\text{ V}$, load change from 400 mA to 4.4 A	Figure 2-40
	Line transient response, DCDC1, V_{IN} change from 6 V to 8.4 V, $I_{OUT} = 4\text{ A}$	Figure 2-41
	Line transient response, DCDC2, V_{IN} change from 6 V to 8.4 V, $I_{OUT} = 4\text{ A}$	Figure 2-42
	Line transient response, DCDC3, $V_{OUT} = 1.35\text{ V}$, V_{IN} change from 6 V to 8.4 V, $I_{OUT} = 4\text{ A}$	Figure 2-43
	Startup after enable, DCDC1, $V_{IN} = 7.5\text{ V}$, $I_{OUT} = 4\text{ A}$	Figure 2-44
	Startup after enable, DCDC2, $V_{IN} = 7.5\text{ V}$, $I_{OUT} = 4\text{ A}$	Figure 2-45
	Startup after enable, DCDC3, $V_{OUT} = 1.35\text{ V}$, $V_{IN} = 7.5\text{ V}$, $I_{OUT} = 4\text{ A}$	Figure 2-46
	Startup after enable, Charger, $V_{IN} = 12\text{ V}$, $I_{OUT} = 4\text{ A}$	Figure 2-47
	Softstart, Charger, $V_{IN} = 12\text{ V}$, $I_{OUT} = 4\text{ A}$	Figure 2-48
	Shutdown after disable, Charger, $V_{IN} = 12\text{ V}$, $I_{OUT} = 4\text{ A}$	Figure 2-49
	Continuous current mode operation, Charger, $V_{IN} = 12\text{ V}$	Figure 2-50
	Discontinuous current mode operation, Charger, $V_{IN} = 12\text{ V}$	Figure 2-51
	Adapter input power up and power down, Charger, $V_{IN} = 12\text{ V}$	Figure 2-52
	Supplement mode operation, Charger, $V_{IN} = 12\text{ V}$	Figure 2-53
	Input DPM operation, Charger, $V_{IN} = 12\text{ V}$	Figure 2-54
	Battery removal and insertion, Charger, $V_{IN} = 12\text{ V}$	Figure 2-55
	Battery short, Charger, $V_{IN} = 12\text{ V}$	Figure 2-56

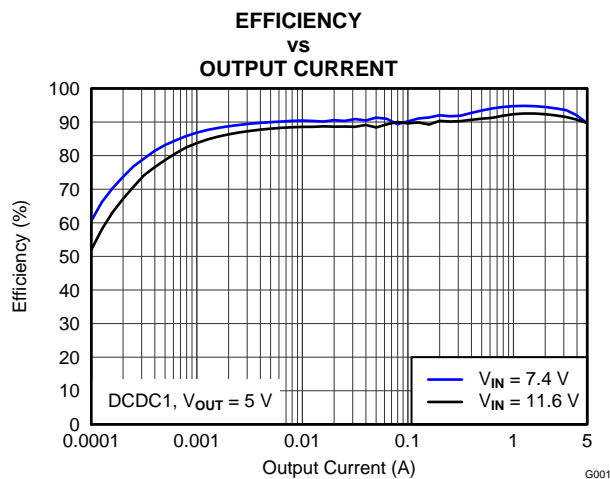


Figure 2-1.

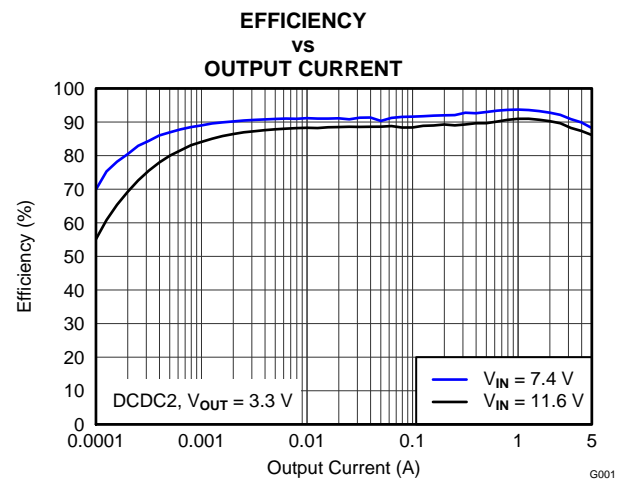


Figure 2-2.

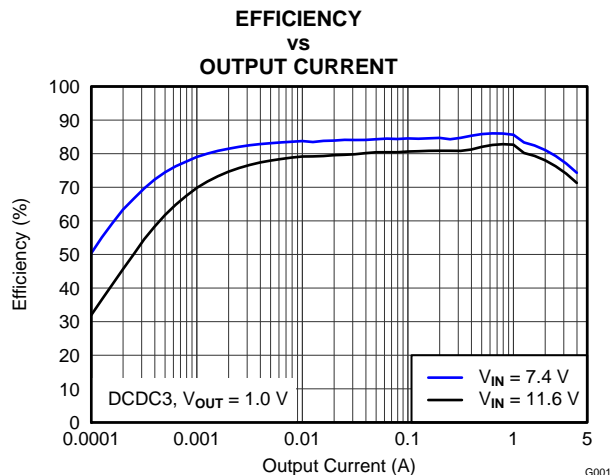


Figure 2-3.

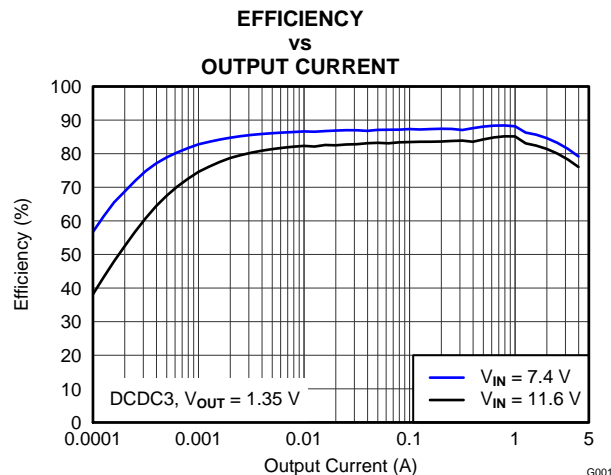


Figure 2-4.

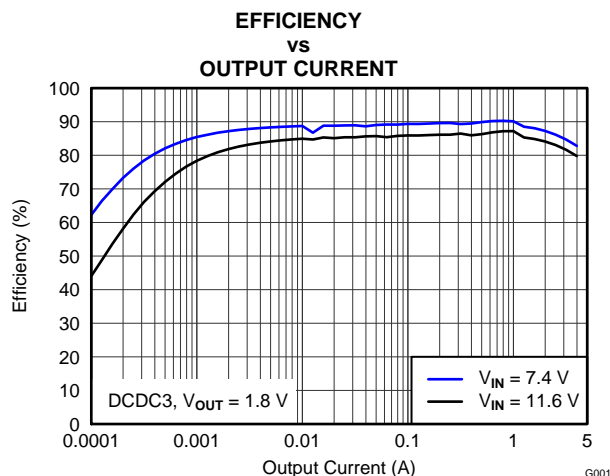


Figure 2-5.

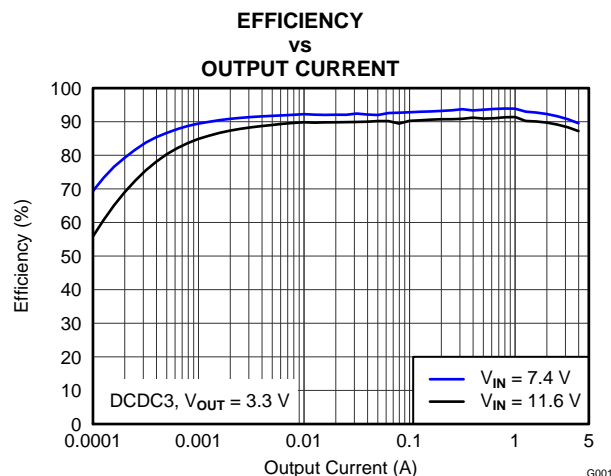


Figure 2-6.

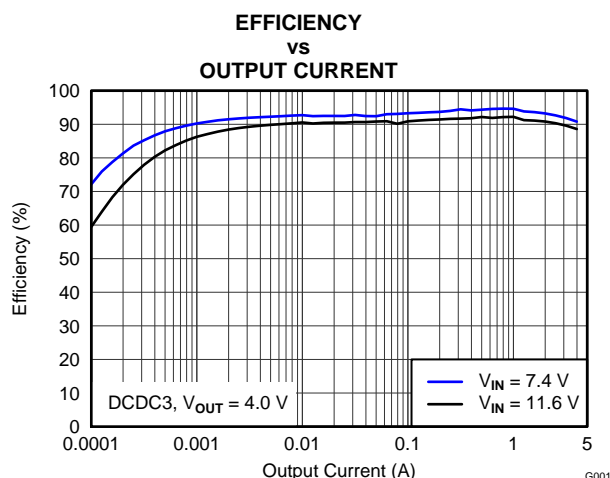


Figure 2-7.

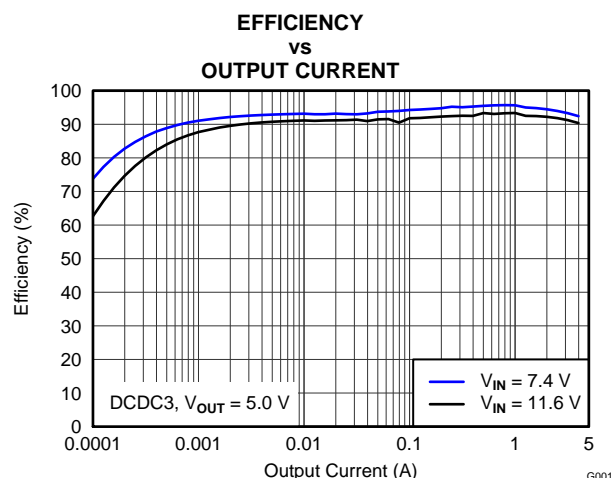


Figure 2-8.

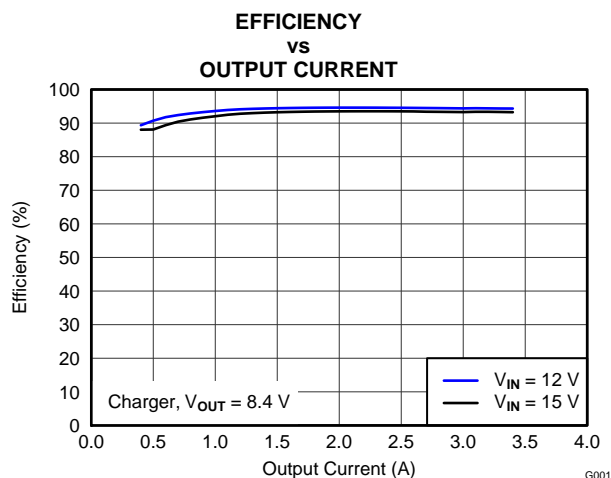


Figure 2-9.

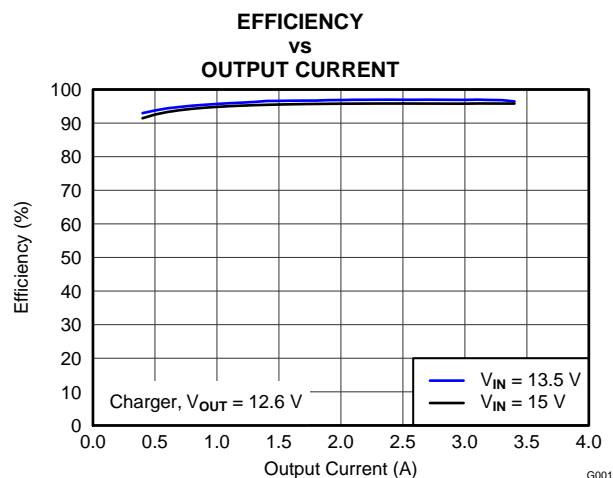


Figure 2-10.

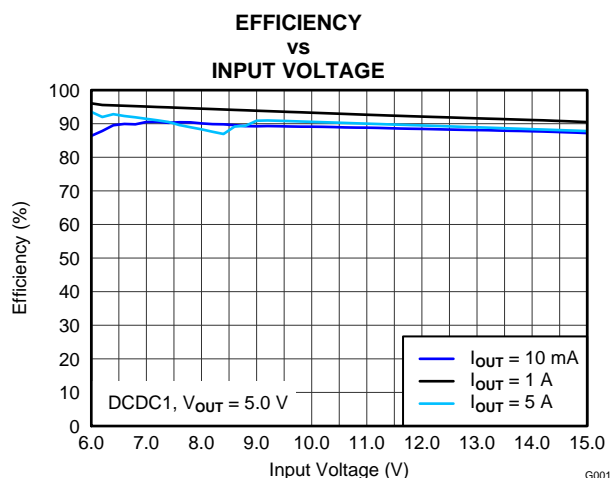


Figure 2-11.

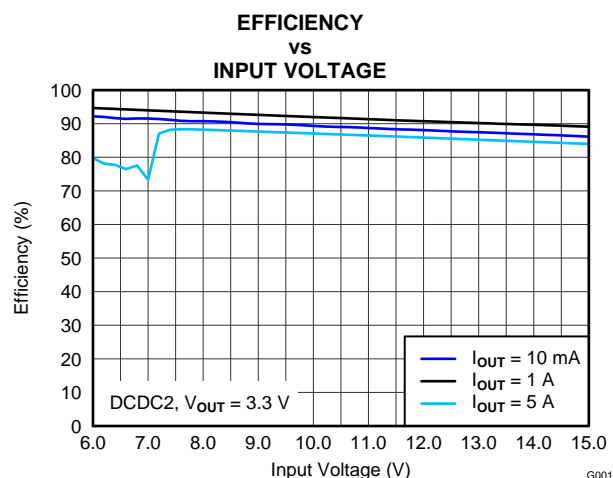


Figure 2-12.

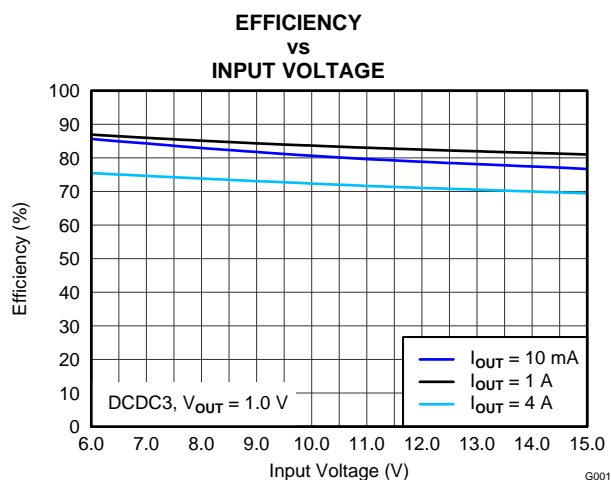


Figure 2-13.

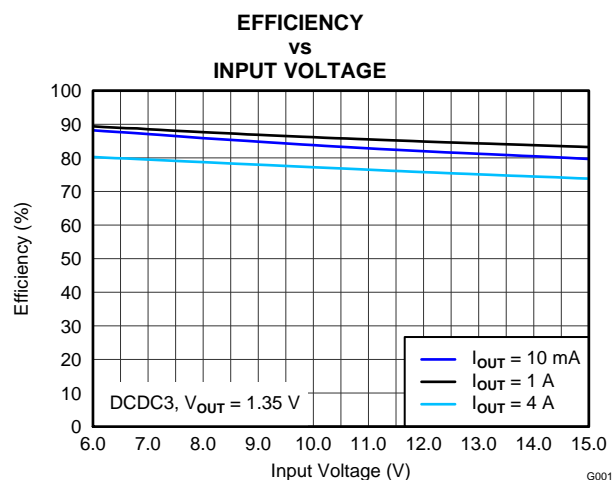


Figure 2-14.

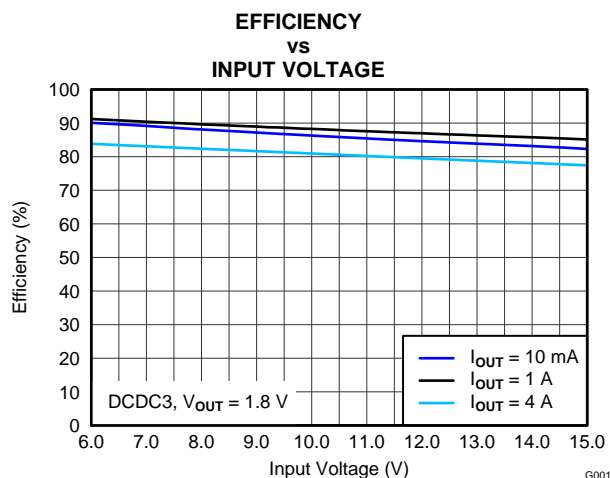


Figure 2-15.

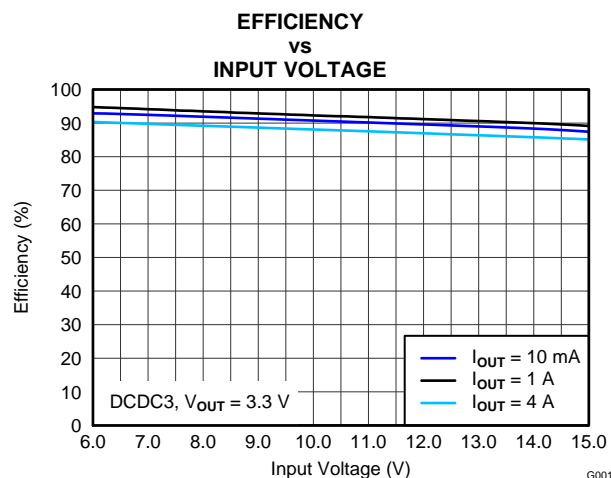


Figure 2-16.

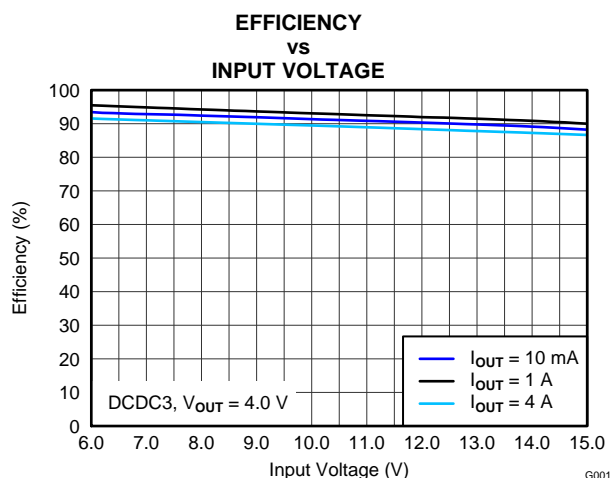


Figure 2-17.

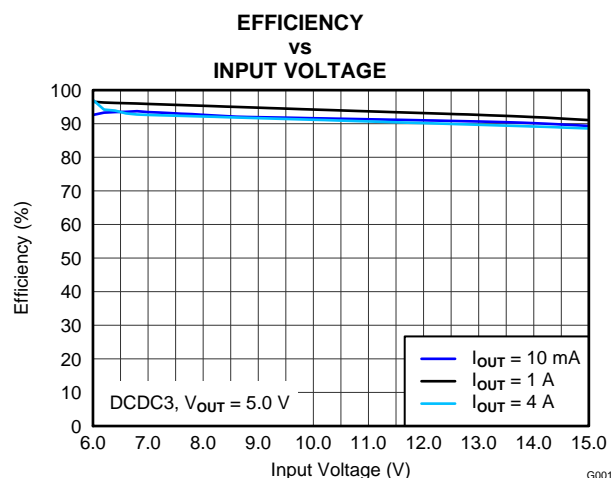


Figure 2-18.

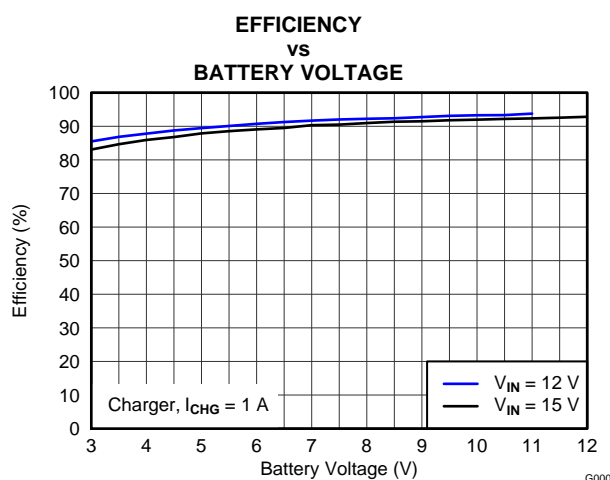


Figure 2-19.

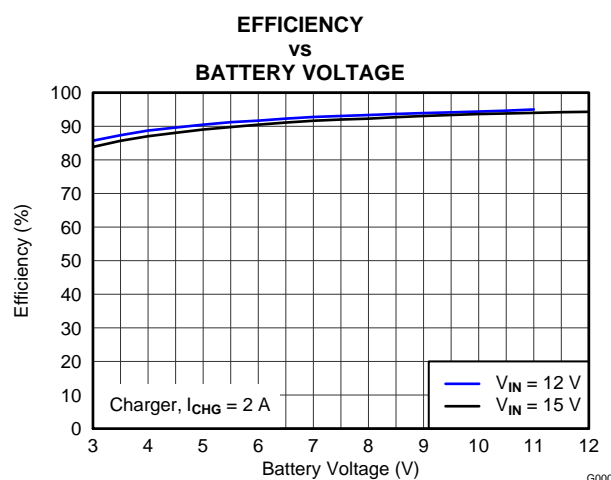


Figure 2-20.

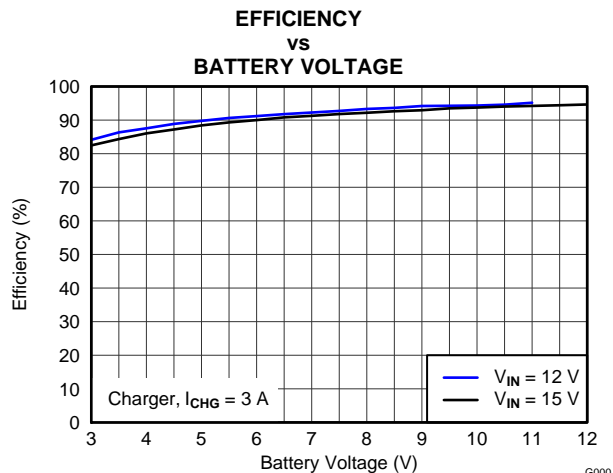


Figure 2-21.

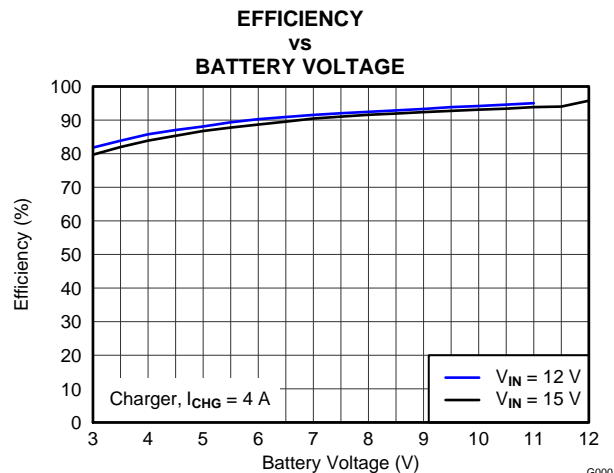


Figure 2-22.

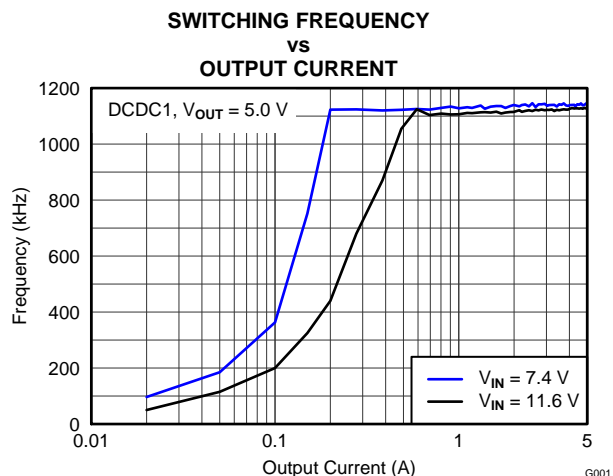


Figure 2-23.

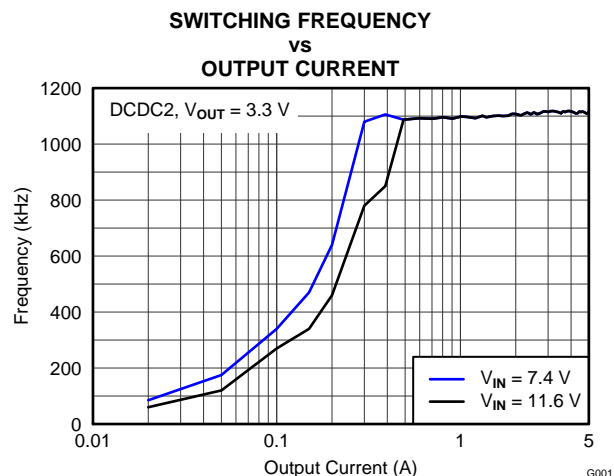


Figure 2-24.

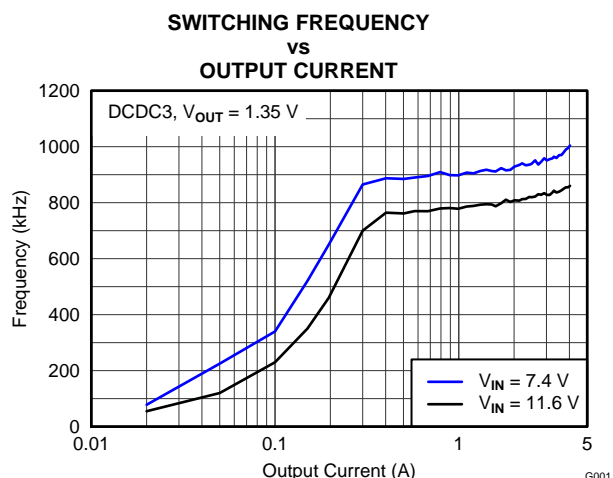


Figure 2-25.

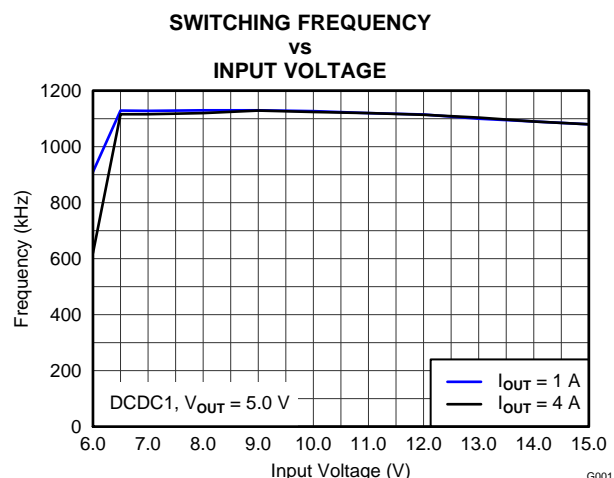


Figure 2-26.

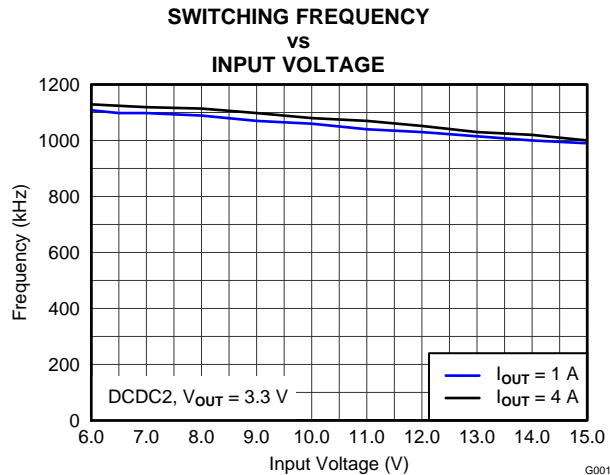


Figure 2-27.

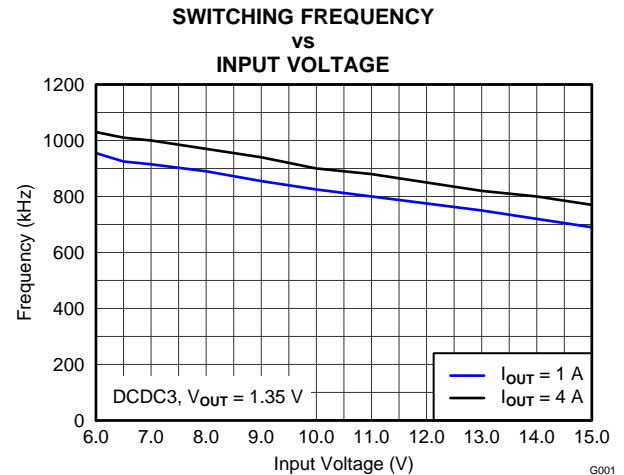


Figure 2-28.

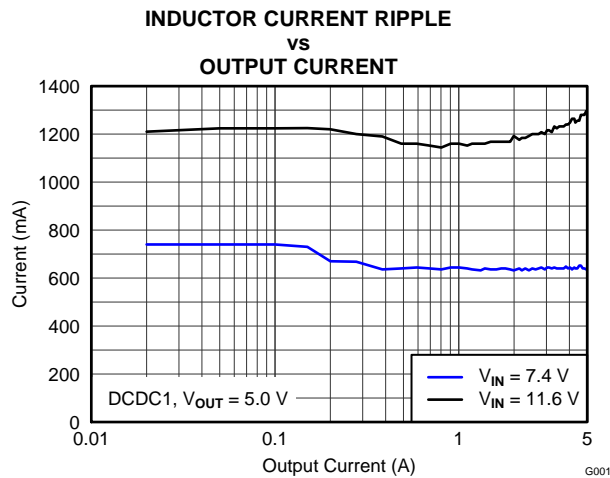


Figure 2-29.

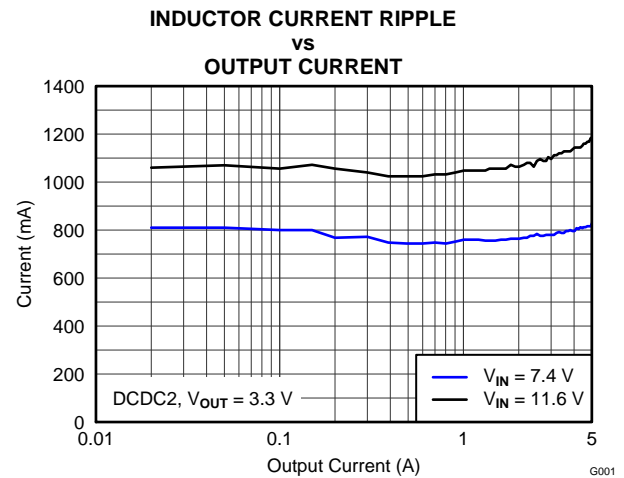


Figure 2-30.

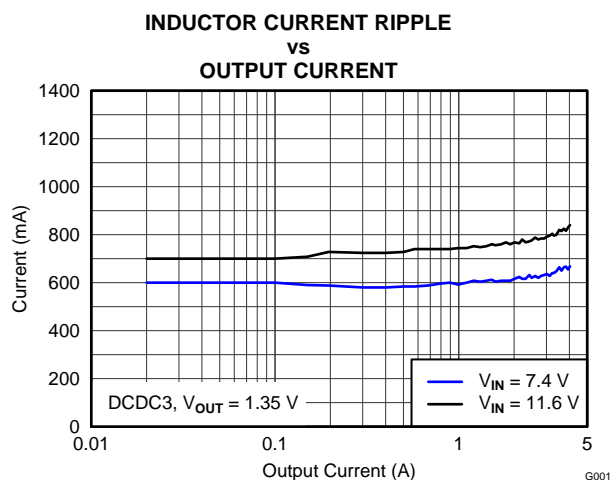


Figure 2-31.

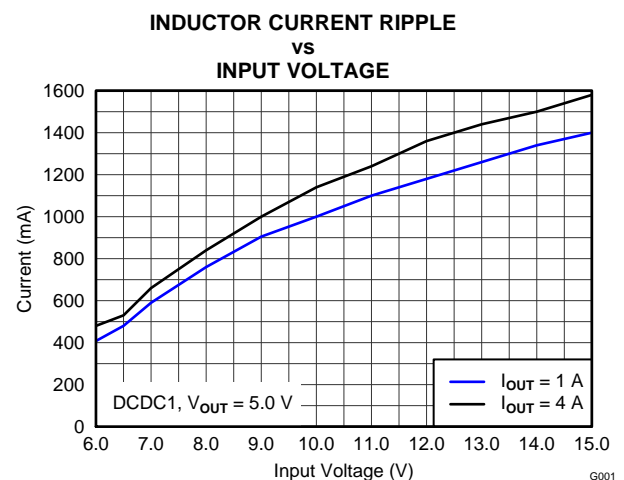


Figure 2-32.

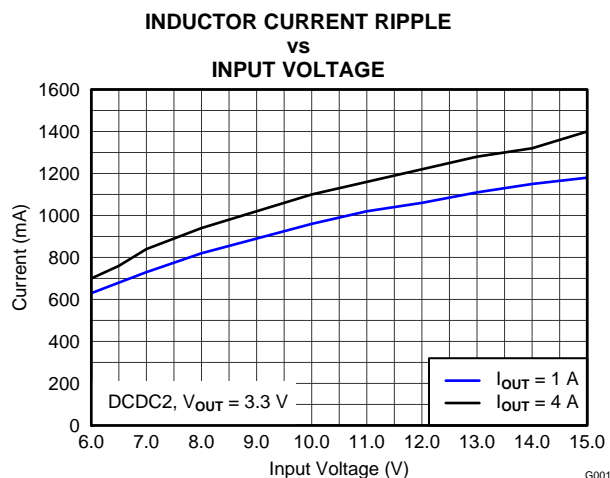


Figure 2-33.



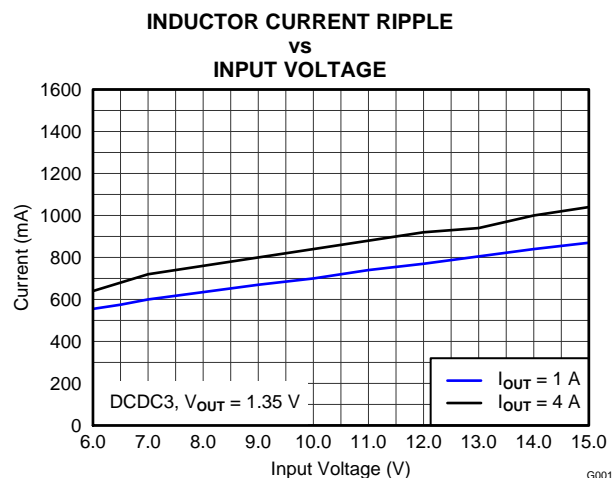



Figure 2-34.

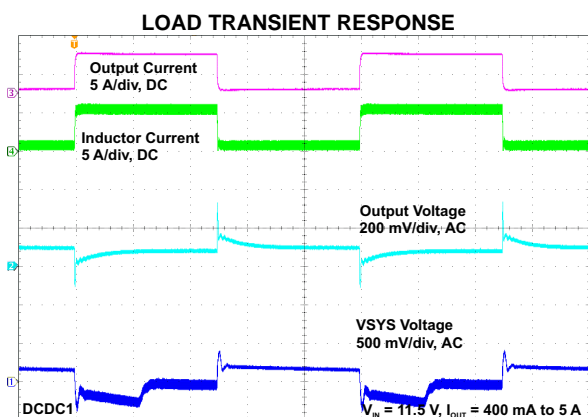


Time 200 $\mu\text{s/div}$
Figure 2-35.

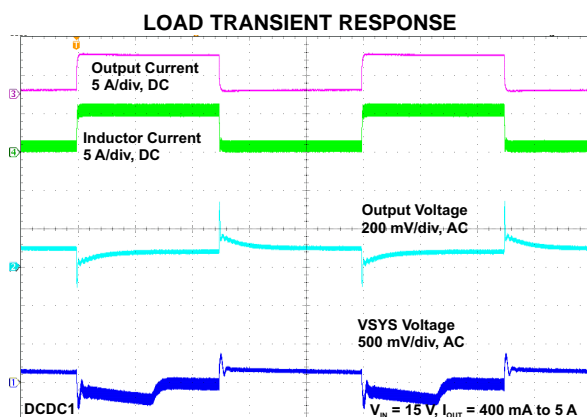


Time 200 $\mu\text{s/div}$
Figure 2-36.

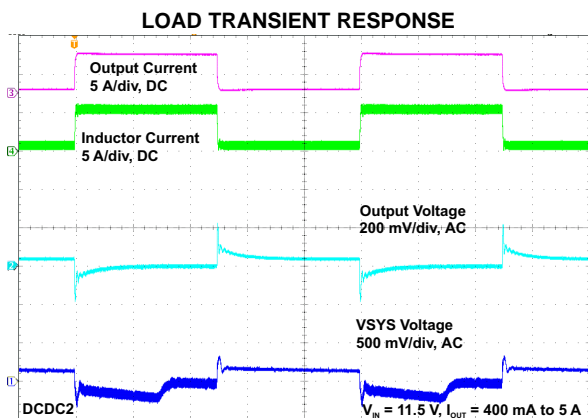


Time 200 $\mu\text{s/div}$
Figure 2-37.

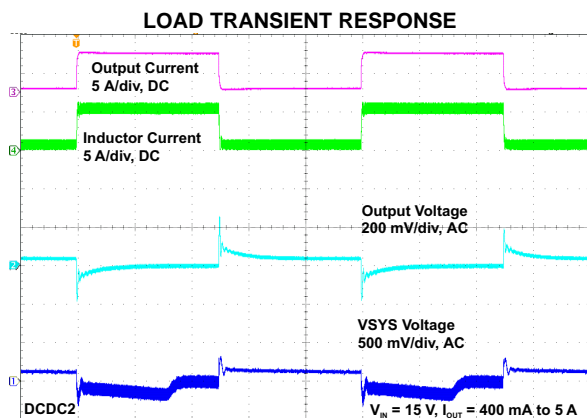


Time 200 $\mu\text{s/div}$
Figure 2-38.

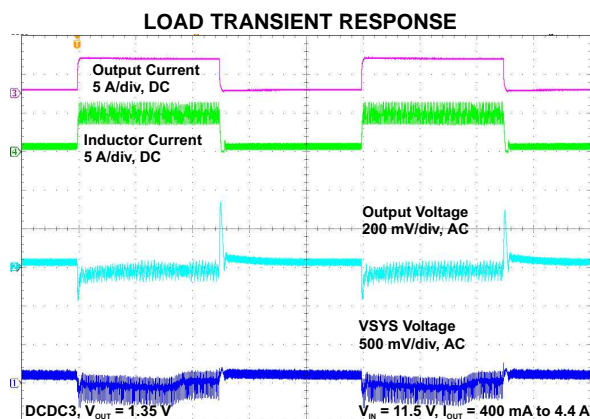


Time 200 $\mu\text{s/div}$
Figure 2-39.

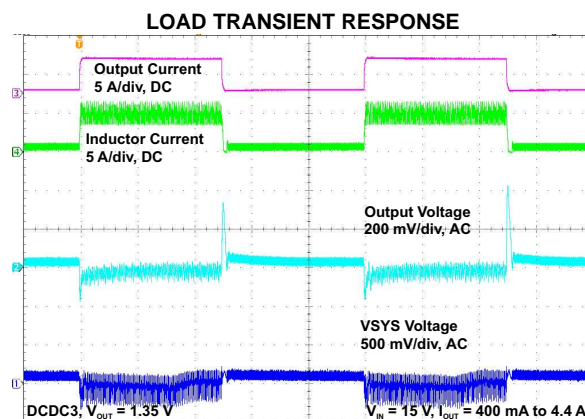


Time 200 $\mu\text{s/div}$
Figure 2-40.

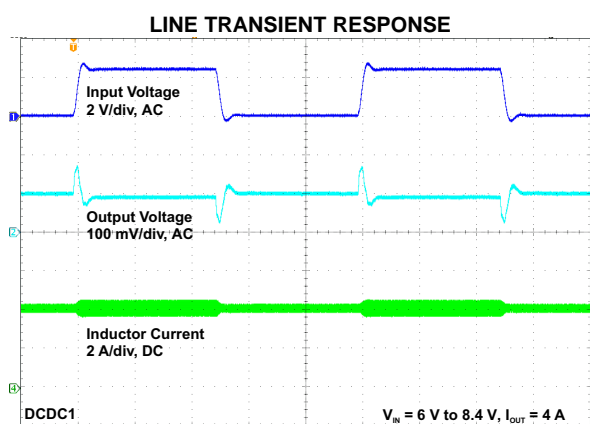


Time 200 $\mu\text{s/div}$
Figure 2-41.

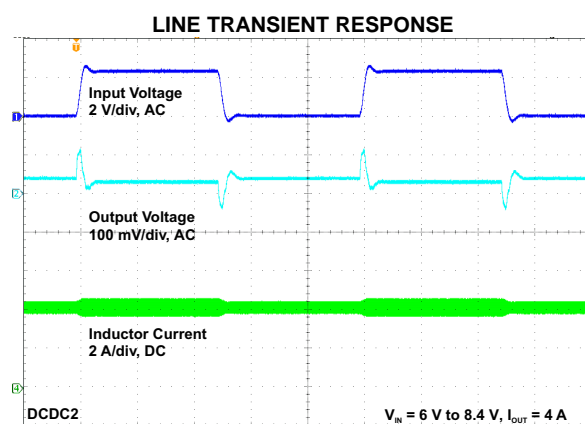


Time 200 $\mu\text{s/div}$
Figure 2-42.

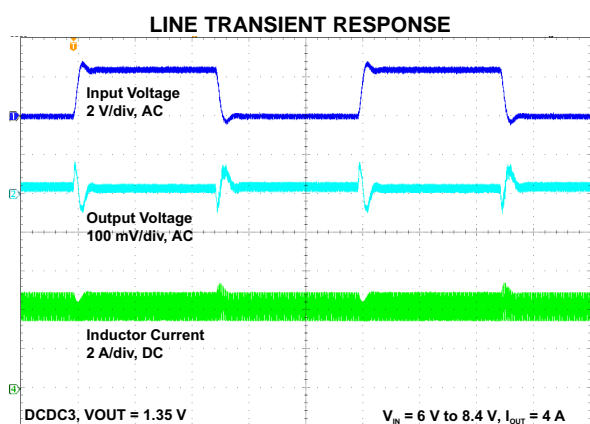


Time 200 $\mu\text{s/div}$
Figure 2-43.

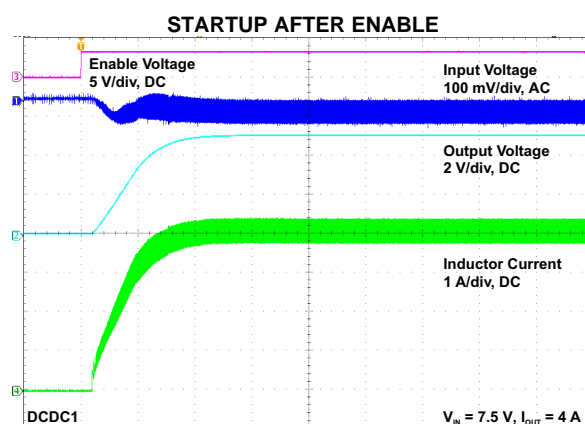


Time 200 $\mu\text{s/div}$
Figure 2-44.

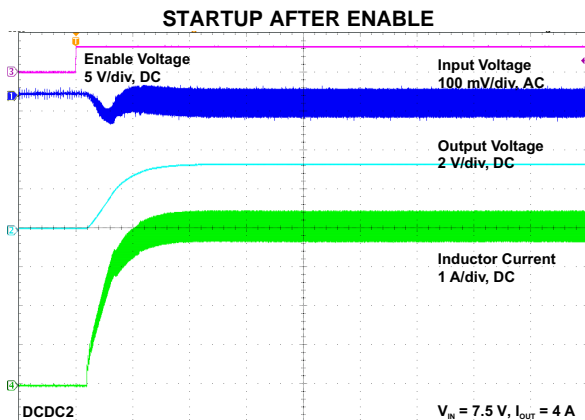


Time 200 $\mu\text{s}/\text{div}$
Figure 2-45.

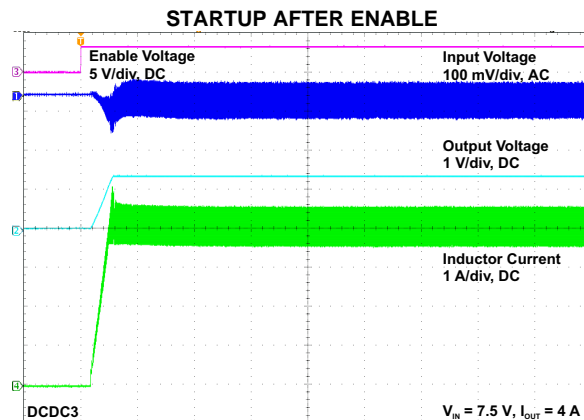


Time 200 $\mu\text{s}/\text{div}$
Figure 2-46.

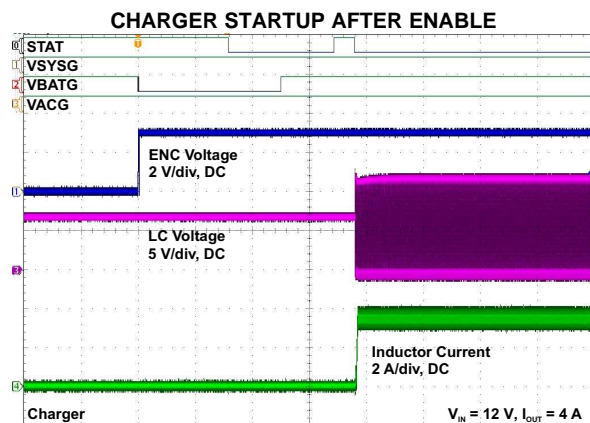


Time 400 ms/div
Figure 2-47.

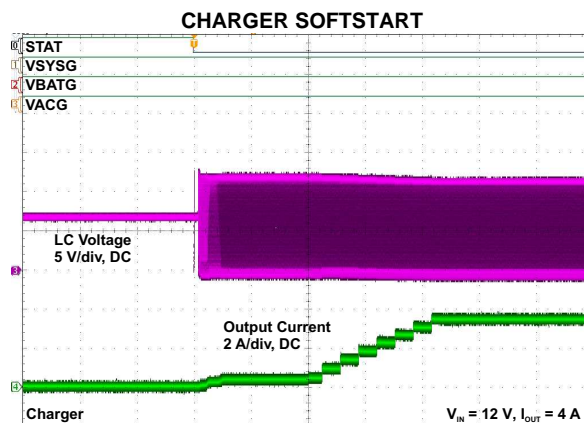

Time 4 ms/div
Figure 2-48.

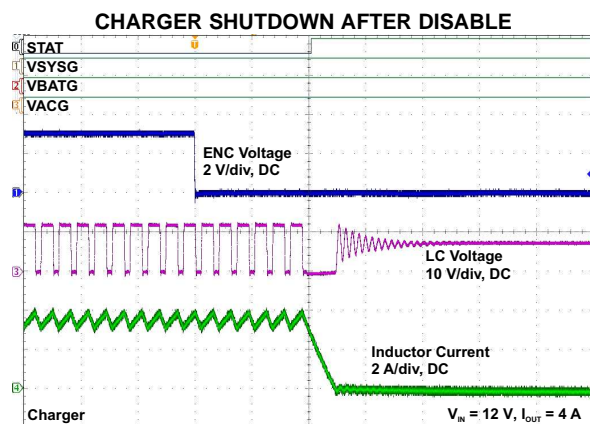

Time 2 $\mu\text{s}/\text{div}$
Figure 2-49.

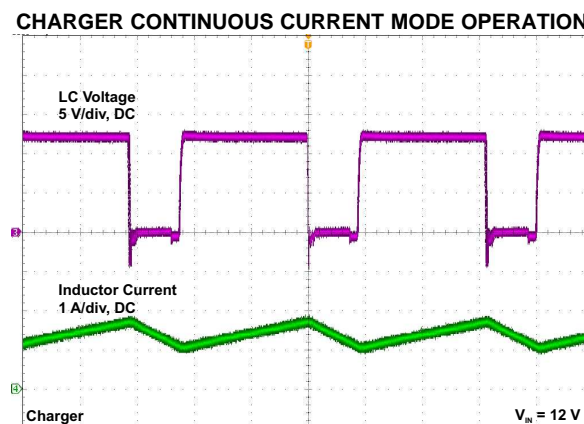

Time 200 ns/div
Figure 2-50.

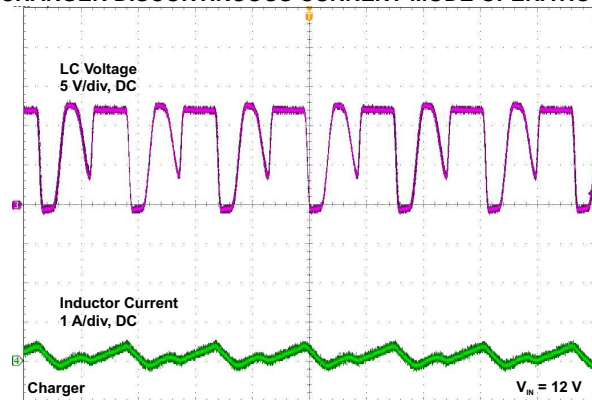
CHARGER DISCONTINUOUS CURRENT MODE OPERATION

Figure 2-51.

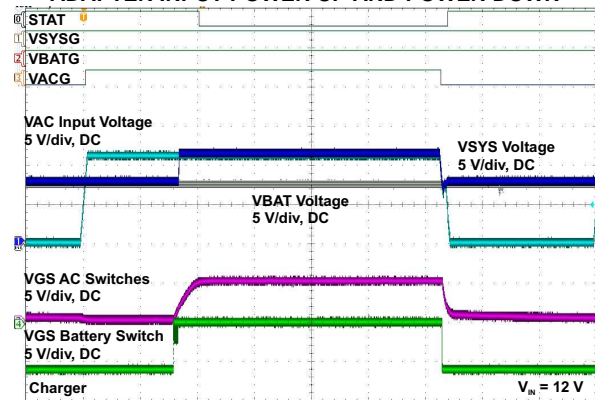
ADAPTER INPUT POWER UP AND POWER DOWN

Figure 2-52.

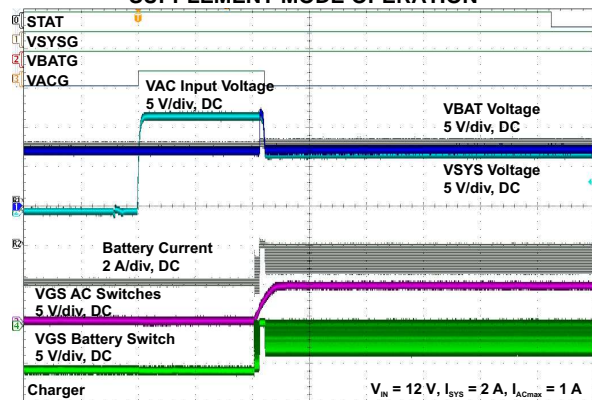
SUPPLEMENT MODE OPERATION

Figure 2-53.

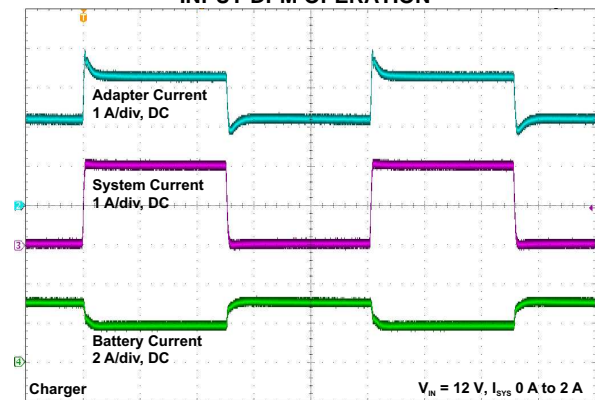
INPUT DPM OPERATION

Figure 2-54.

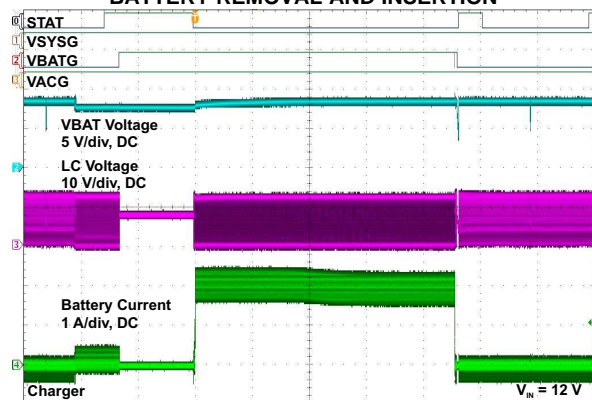
BATTERY REMOVAL AND INSERTION

Figure 2-55.


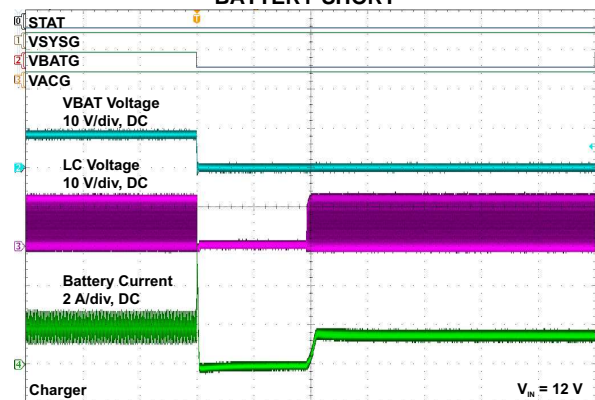
BATTERY SHORT

Figure 2-56.

2.13 PARAMETER MEASUREMENT INFORMATION - DCDC CONVERTERS

2.13.1 Circuit Drawing

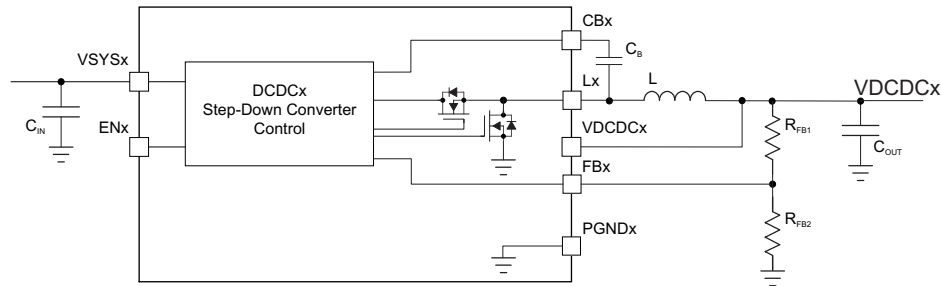

2.13.2 Lists of Components

Table 2-3. List of Components - DCDC1

REFERENCE	DESCRIPTION	MANUFACTURER
L	2.2 μ H, 5 mm x 5mm x 3 mm	XAL5030-222, Coilcraft
C _{IN}	10 μ F, 25 V, 0603, X7R ceramic in parallel to	GRM188R61E106ME73, Murata
	1 μ F, 25 V, 0402, X7R ceramic	GRM155R61E105MA12, Murata
C _{OUT}	4 x 10 μ F, 25 V, 0603, X7R ceramic in parallel to	GRM188R61E106ME73, Murata
	2.2 μ F 10 V, 0603, X7R ceramic	GRM155R61A225KE95, Murata
C _{B1}	4700 pF, X7R ceramic	
R _{FB1}	not used, FB1 is directly connected to VDCDC1	
R _{FB2}	not used	

Table 2-4. List of Components - DCDC2

REFERENCE	DESCRIPTION	MANUFACTURER
L	2.2 μ H, 5 mm x 5mm x 3 mm	XAL5030-222, Coilcraft
C _{IN}	10 μ F, 25 V, 0603, X7R ceramic in parallel to	GRM188R61E106ME73, Murata
	1 μ F, 25 V, 0402, X7R ceramic	GRM155R61E105MA12, Murata
C _{OUT}	4 x 10 μ F, 25 V, 0603, X7R ceramic in parallel to	GRM188R61E106ME73, Murata
	2.2 μ F 10 V, 0603, X7R ceramic	GRM155R61A225KE95, Murata
C _{B2}	4700 pF, X7R ceramic	
R _{FB1}	not used, FB2 is directly connected to VDCDC2	
R _{FB2}	not used	

Table 2-5. List of Components - DCDC3


REFERENCE	DESCRIPTION	MANUFACTURER	COMMENTS
L	2.2 μ H, 5 mm x 5mm x 3 mm	XAL5030-222, Coilcraft	
C _{IN}	10 μ F, 25 V, 0603, X7R ceramic in parallel to	GRM188R61E106ME73, Murata	
	1 μ F, 25 V, 0402, X7R ceramic	GRM155R61E105MA12, Murata	

Table 2-5. List of Components - DCDC3 (continued)

REFERENCE	DESCRIPTION	MANUFACTURER	COMMENTS
C _{OUT}	4 × 10 µF, 25 V, 0603, X7R ceramic in parallel to	GRM188R61E106ME73, Murata	
	2.2 µF 10 V, 0603, X7R ceramic	GRM155R61A225KE95, Murata	
C _{B1}	4700 pF, X7R ceramic	any	
R _{FB1}	162 kΩ, 1%, 0402	any	V _{DCDC3} = 1.0 V
	330 kΩ, 1%, 0402	any	V _{DCDC3} = 1.35 V
	453 kΩ, 1%, 0402	any	V _{DCDC3} = 1.8 V
	590 kΩ, 1%, 0402	any	V _{DCDC3} = 3.3 V
	649 kΩ, 1%, 0402	any	V _{DCDC3} = 4.0 V
	787 kΩ, 1%, 0402	any	V _{DCDC3} = 5.0 V
R _{FB2}	649 kΩ, 1%, 0402	any	V _{DCDC3} = 1.0 V
	470 kΩ, 1%, 0402	any	V _{DCDC3} = 1.35 V
	365 kΩ, 1%, 0402	any	V _{DCDC3} = 1.8 V
	187 kΩ, 1%, 0402	any	V _{DCDC3} = 3.3 V
	162 kΩ, 1%, 0402	any	V _{DCDC3} = 4.0 V
	150 kΩ, 1%, 0402	any	V _{DCDC3} = 5.0 V

2.14 PARAMETER MEASUREMENT INFORMATION - CHARGER

2.14.1 Circuit Drawing

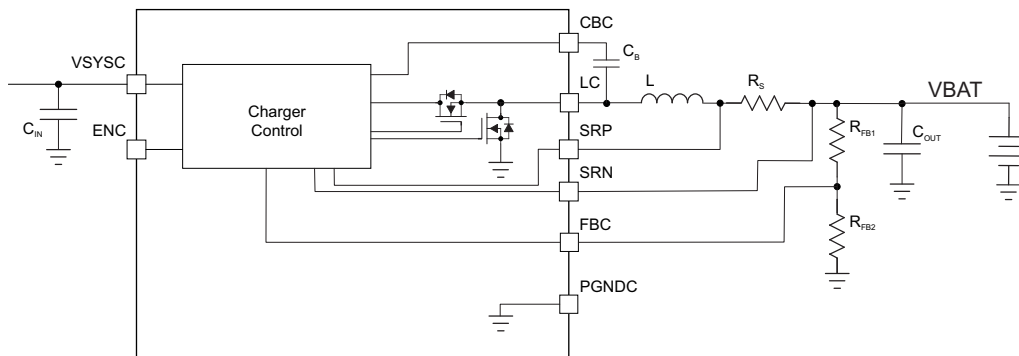

2.14.2 Lists of Components

Table 2-6. List of Components - Charger

REFERENCE	DESCRIPTION	MANUFACTURER	COMMENTS
L	2.2 µH, 5 mm x 5mm x 3 mm	XAL5030-222, Coilcraft	
C _{IN}	2 × 10 µF, 25 V, 0603, X7R ceramic in parallel to	GRM188R61E106ME73, Murata	
	1 µF, 25 V, 0402, X7R ceramic	GRM155R61E105MA12, Murata	
C _{OUT}	2 × 10 µF, 25 V, 0603, X7R ceramic in parallel to	GRM188R61E106ME73, Murata	
	1 µF, 25 V, 0402, X7R ceramic	GRM155R61E105MA12, Murata	
C _{BC}	4700 pF, X7R ceramic	any	
R _S	10 mΩ, 0.1%, 1206	any	maximum charge current 4 A

Table 2-6. List of Components - Charger (continued)

REFERENCE	DESCRIPTION	MANUFACTURER	COMMENTS
R _{FB1}	330 kΩ, 1%, 0402	any	charge termination voltage V _{BAT} = 8.4 V
	1100 kΩ, 1%, 0402	any	charge termination voltage V _{BAT} = 12.6 V
R _{FB2}	110 kΩ, 1%, 0402	any	charge termination voltage V _{BAT} = 8.4 V
	220 kΩ, 1%, 0402	any	charge termination voltage V _{BAT} = 12.6 V

3 DETAILED DESCRIPTION

3.1 I²C INTERFACE

I²C is a 2-wire serial interface developed by NXP (formerly Philips Semiconductor) (see I²C-Bus Specification and user manual, Rev 4, 13 February 2012). The bus consists of a data line (SDA) and a clock line (SCL) with pull-up structures. When the bus is idle, both SDA and SCL lines are pulled high. All the I²C compatible devices connect to the I²C bus through open drain I/O pins, SDA and SCL. A master device, usually a microcontroller or a digital signal processor, controls the bus. The master is responsible for generating the SCL signal and device addresses. The master also generates specific conditions that indicate the START and STOP of data transfer. A slave device receives and/or transmits data on the bus under control of the master device.

TPS6509x works as a slave and supports the following data transfer modes, as defined in the I²C-Bus Specification: standard mode (100 kbps), fast mode (400 kbps), and high-speed mode (up to 3.4 Mbps in write mode). The interface adds flexibility to the power supply solution, enabling most functions to be programmed to new values depending on the instantaneous application requirements. Register contents are loaded when voltage is applied to TPS6509x higher than the undervoltage lockout threshold. The I²C interface is running from an internal oscillator that is automatically enabled when there is an access to the interface.

The data transfer protocol for standard and fast modes is exactly the same, therefore, they are referred to as F/S-mode in this document. The protocol for high-speed mode is different from the F/S-mode, and it is referred to as H/S-mode.

The TPS6509x supports 7-bit addressing; 10-bit addressing and general call address are not supported. The default device address is set to *1001000*. The 2 LSB bits of the address are factory programmable. Please contact TI about availability of different default device addresses.

All registers are set to their default value when the supply voltage is below the UVLO threshold.

3.1.1 F/S-Mode Protocol

The master initiates data transfer by generating a start condition. The start condition is when a high-to-low transition occurs on the SDA line while SCL is high, see [Figure 3-1](#). All I²C-compatible devices should recognize a start condition.

The master then generates the SCL pulses, and transmits the 7-bit address and the read/write direction bit R/W on the SDA line. During all transmissions, the master ensures that data is valid. A valid data condition requires the SDA line to be stable during the entire high period of the clock pulse, see [Figure 3-2](#). All devices recognize the address sent by the master and compare it to their internal fixed addresses. Only the slave device with a matching address generates an *acknowledge*, see [Figure 3-3](#), by pulling the SDA line low during the entire high period of the ninth SCL cycle. Upon detecting this acknowledge, the master knows that the communication link with a slave has been established.

The master generates further SCL cycles to either transmit data to the slave (R/W bit = 0) or receive data from the slave (R/W bit = 1). In either case, the receiver needs to acknowledge the data sent by the transmitter. An acknowledge signal can either be generated by the master or by the slave, depending on which one is the receiver. 9-bit valid data sequences consisting of 8-bit data and 1-bit acknowledge can continue as long as necessary.

To signal the end of the data transfer, the master generates a stop condition by pulling the SDA line from low to high while the SCL line is high, see [Figure 3-1](#). This releases the bus and stops the communication link with the addressed slave. All I²C compatible devices must recognize the stop condition. Upon the receipt of a stop condition, all devices know that the bus is released, and they wait for a start condition followed by a matching address.

Attempting to read data from register addresses not listed in this section results in FFh being read out.

3.1.2 H/S-Mode Protocol

When the bus is idle, both SDA and SCL lines are pulled high by the pull-up devices.

The master generates a start condition followed by a valid serial byte containing HS master code 00001XXX. This transmission is made in F/S-mode at no more than 400 Kbps. No device is allowed to acknowledge the HS master code, but all devices must recognize it and switch their internal setting to support 3.4-Mbps operation.

The master then generates a repeated start condition (a repeated start condition has the same timing as the start condition). After this repeated start condition, the protocol is the same as F/S-mode, except that transmission speeds up to 3.4 Mbps are allowed. A stop condition ends the HS-mode and switches all the internal settings of the slave devices to support the F/S-mode. Instead of using a stop condition, repeated start conditions are used to secure the bus in HS-mode.

Attempting to read data from register addresses not listed in this section results in FFh being read out.

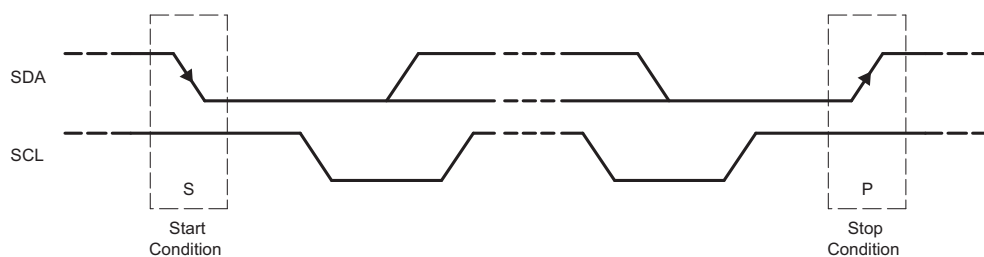


Figure 3-1. START and STOP Conditions

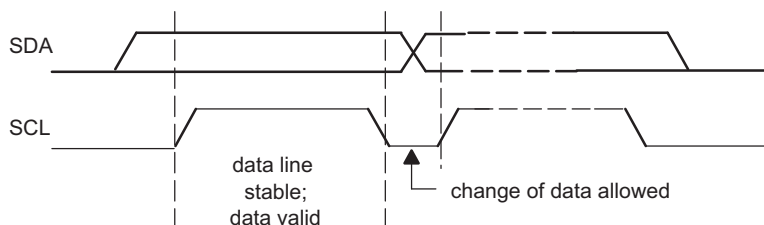


Figure 3-2. Bit Transfer on the I²C-bus

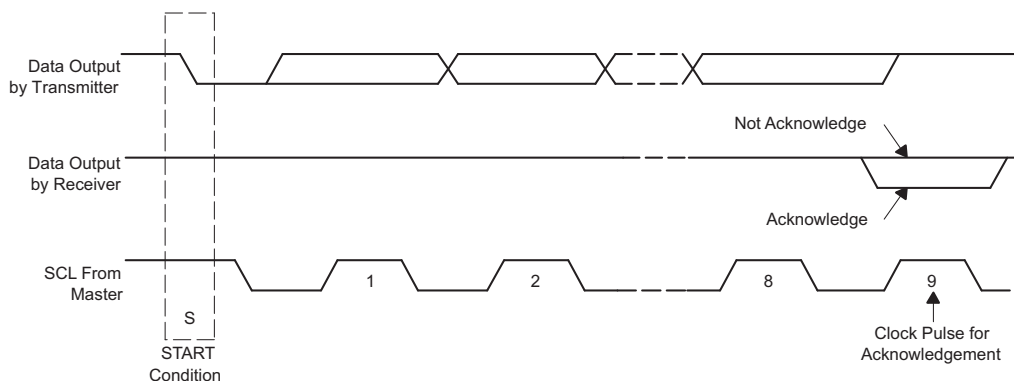


Figure 3-3. Acknowledge on the I²C-bus



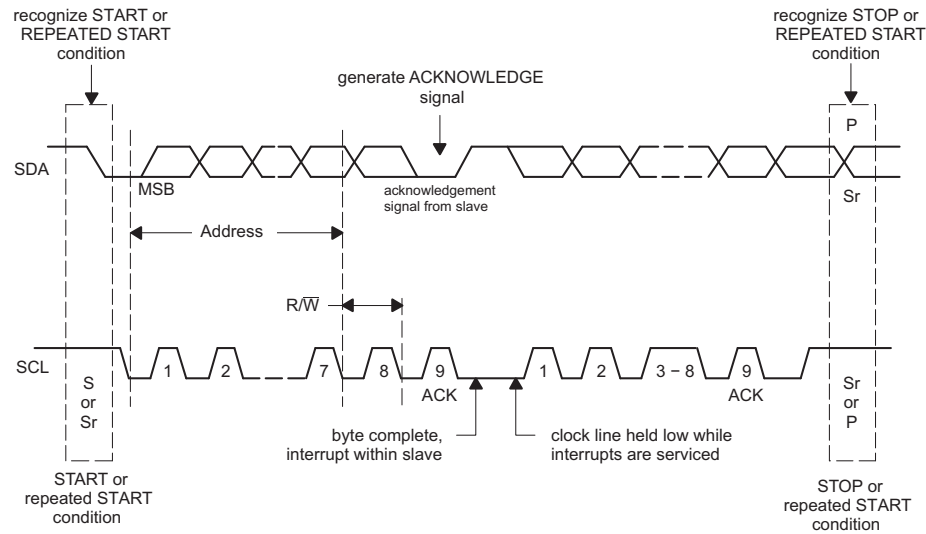


Figure 3-4. Bus Protocol

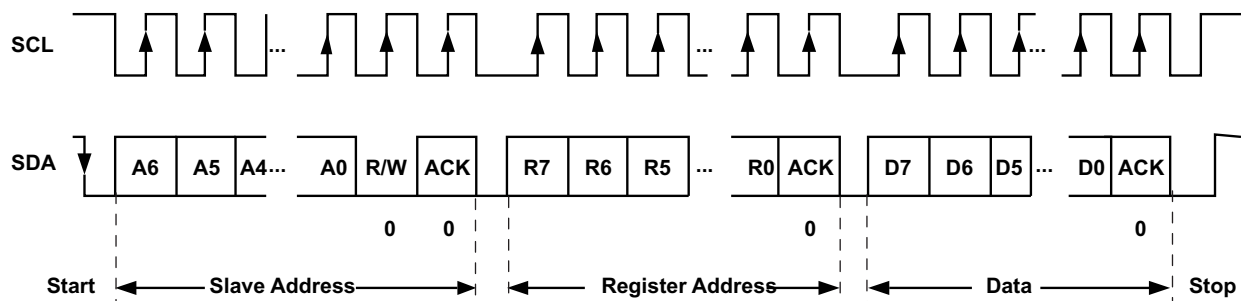

NOTE: SLAVE=This Device

Figure 3-5. I2C Interface WRITE to TPS65090A in F/S Mode

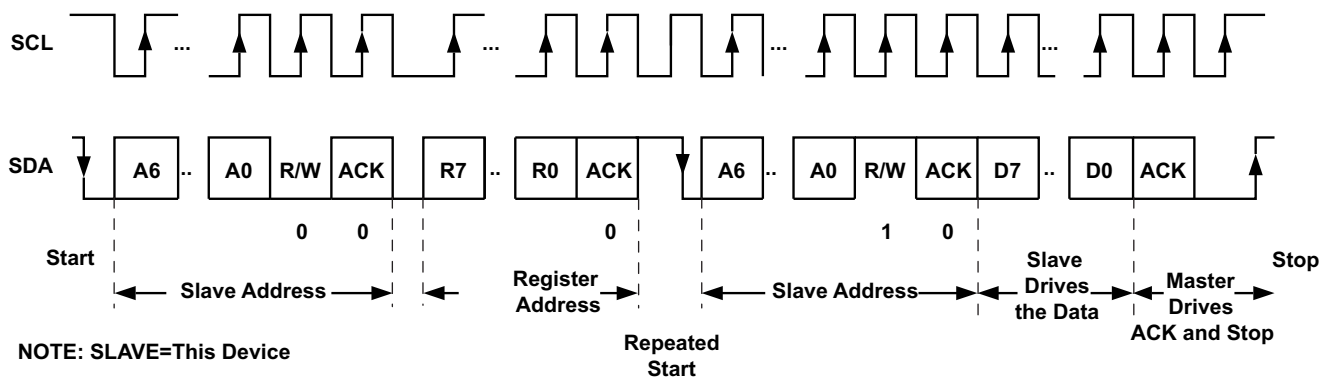

NOTE: SLAVE=This Device

Figure 3-6. I2C Interface READ from TPS65090A in F/S Mode

3.2 REGISTER DEFINITION

IRQ1 Register Address: 0x00							
B7	B6	B5	B4	B3	B2	B1	B0
OLDCDC2	OLDCDC1	CGCPL	CGACT	VBATG	VSYSG	VACG	IRQ
0	0	0	0	0	0	0	0
r	r	r	r	r	r	r	r/w
OLDCDC2		Overload on DCDC2, IRQ on change to 1, cleared on interrupt clear 0: normal operation 1: overload					
OLDCDC1		Overload on DCDC1, IRQ on change to 1, cleared on interrupt clear 0: normal operation 1: overload					
CGCPL		Charging completed, IRQ on change to 1, cleared on interrupt clear 0: charging not completed 1: charging completed					
CGACT		Charging status, interrupt on change 0: charging suspended 1: charging active					
VBATG		VBAT status, interrupt on change 0: VBAT not available 1: VBAT available and useable					
VSYSG		VSYS status, interrupt on change 0: VSYS not available 1: VSYS available and useable					
VACG		VAC status, interrupt on change 0: VAC not available 1: VAC available and useable					
IRQ		Interrupt 0: interrupt cleared 1: interrupt asserted					

IRQ2 Register Address: 0x01							
B7	B6	B5	B4	B3	B2	B1	B0
OLFET7	OLFET6	OLFET5	OLFET4	OLFET3	OLFET2	OLFET1	OLDCDC3
0	0	0	0	0	0	0	0
r	r	r	r	r	r	r	r
OLFET7		Overload on FET7, IRQ on change to 1, cleared on interrupt clear 0: normal operation 1: overload					
OLFET6		Overload on FET6, IRQ on change to 1, cleared on interrupt clear 0: normal operation 1: overload					
OLFET5		Overload on FET5, IRQ on change to 1, cleared on interrupt clear 0: normal operation 1: overload					
OLFET4		Overload on FET4, IRQ on change to 1, cleared on interrupt clear 0: normal operation 1: overload					
OLFET3		Overload on FET3, IRQ on change to 1, cleared on interrupt clear 0: normal operation 1: overload					
OLFET2		Overload on FET2, IRQ on change to 1, cleared on interrupt clear 0: normal operation 1: overload					
OLFET1		Overload on FET1, IRQ on change to 1, cleared on interrupt clear 0: normal operation 1: overload					
OLDCDC3		Overload on DCDC3, IRQ on change to 1, cleared on interrupt clear 0: normal operation 1: overload					

IRQ1MASK Register Address: 0x02							
B7	B6	B5	B4	B3	B2	B1	B0
OLDCDC2MASK	OLDCDC1MASK	CGCPLMASK	CGACTMASK	VBATGMASK	VSYSGMASK	VACGMASK	reserved
0	0	0	0	0	0	0	0
r/w	r/w	r/w	r/w	r/w	r/w	r/w	r
OLDCDC2MASK	Enable overload on DCDC2 interrupt 0: disabled 1: enabled						
OLDCDC1MASK	Enable overload on DCDC1 interrupt 0: disabled 1: enabled						
CGCPLMASK	Enable charging completed status interrupt 0: disabled 1: enabled						
CGACTMASK	Enable charging status interrupt 0: disabled 1: enabled						
VBATGMASK	Enable VBAT status interrupt 0: disabled 1: enabled						
VSYSGMASK	Enable VSYS status interrupt 0: disabled 1: enabled						
VACGMASK	Enable VAC status interrupt 0: disabled 1: enabled						
reserved							

IRQ2MASK Register Address: 0x03							
B7	B6	B5	B4	B3	B2	B1	B0
OLFET7MASK	OLFET6MASK	OLFET5MASK	OLFET4MASK	OLFET3MASK	OLFET2MASK	OLFET1MASK	OLDCDC3MASK
0	0	0	0	0	0	0	0
r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w
OLFET7MASK	Enable overload on FET7 interrupt 0: disabled 1: enabled						
OLFET6MASK	Enable overload on FET6 interrupt 0: disabled 1: enabled						
OLFET5MASK	Enable overload on FET5 interrupt 0: disabled 1: enabled						
OLFET4MASK	Enable overload on FET4 interrupt 0: disabled 1: enabled						
OLFET3MASK	Enable overload on FET3 interrupt 0: disabled 1: enabled						
OLFET2MASK	Enable overload on FET2 interrupt 0: disabled 1: enabled						
OLFET1MASK	Enable overload on FET1 interrupt 0: disabled 1: enabled						
OLDCDC3MASK	Enable overload on DCDC3 interrupt 0: disabled 1: enabled						

CG_CTRL0 Register Address: 0x04							
B7	B6	B5	B4	B3	B2	B1	B0
reserved	IBATSET	IACSET	FASTTIME[2]	FASTTIME[1]	FASTTIME[0]	ENCMASK	ENC
0	0	0	0	0	0	1	0
r	r/w	r/w	r/w	r/w	r/w	r/w	r/w
reserved							
IBATSET		Maximum battery discharge current 0: 100% of programmed current 1: 90% of programmed current					
IACSET		Maximum adapter current 0: 100% of programmed current 1: 90% of programmed current					
FASTTIME[2:0]		Fastcharge safety timer 000: 2 hrs 001: 3 hrs 010: 4 hrs 011: 5 hrs 100: 6 hrs 101: 7 hrs 110: 8 hrs 111: 10 hrs					
ENCMASK		Enable external charge enable pin 0: external control off 1: external control on					
ENC		Enable charger 0: disabled 1: enabled					

CG_CTRL1 Register Address: 0x05							
B7	B6	B5	B4	B3	B2	B1	B0
T1_SET[2]	T1_SET[1]	T1_SET[0]	T01_VSET[1]	T01_VSET[0]	T01_ISET[2]	T01_ISET[1]	T01_ISET[0]
0	0	1	0	0	0	0	0
r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w
T1_SET[2:0]		Temperature threshold for T1 000: -10 °C (for a default NTC resistor network) 001: 0 °C (for a default NTC resistor network) 010: 10 °C (for a default NTC resistor network) 011: 15 °C (for a default NTC resistor network) 100: 40 °C (for a default NTC resistor network) 101: 45 °C (for a default NTC resistor network) 110: 50 °C (for a default NTC resistor network) 111: 60 °C (for a default NTC resistor network)					
T01_VSET[1:0]		Charge termination feedback voltage for T01 temperature range 00: 2.0 V 01: 2.05 V 10: 2.075 V 11: 2.1 V					
T01_ISET[2:0]		Maximum fast charge current for T01 temperature range 000: 0% of resistor programmed current 001: 25% of resistor programmed current 010: 37.5% of resistor programmed current 011: 50% of resistor programmed current 100: 62.5% of resistor programmed current 101: 75% of resistor programmed current 110: 87.5% of resistor programmed current 111: 100% of resistor programmed current					

CG_CTRL2 Register Address: 0x06							
B7	B6	B5	B4	B3	B2	B1	B0
T2_SET[2]	T2_SET[1]	T2_SET[0]	T12_VSET[1]	T12_VSET[0]	T12_ISET[2]	T12_ISET[1]	T12_ISET[0]
0	1	0	0	1	0	1	1
r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w
T2_SET[2:0]	Temperature threshold for T2 000: -10 °C (for a default NTC resistor network) 001: 0 °C (for a default NTC resistor network) 010: 10 °C (for a default NTC resistor network) 011: 15 °C (for a default NTC resistor network) 100: 40 °C (for a default NTC resistor network) 101: 45 °C (for a default NTC resistor network) 110: 50 °C (for a default NTC resistor network) 111: 60 °C (for a default NTC resistor network)						
T12_VSET[1:0]	Charge termination feedback voltage for T12 temperature range 00: 2.0 V 01: 2.05 V 10: 2.075 V 11: 2.1 V						
T12_ISET[2:0]	Maximum fast charge current for T12 temperature range 000: 0% of resistor programmed current 001: 25% of resistor programmed current 010: 37.5% of resistor programmed current 011: 50% of resistor programmed current 100: 62.5% of resistor programmed current 101: 75% of resistor programmed current 110: 87.5% of resistor programmed current 111: 100% of resistor programmed current						

CG_CTRL3 Register Address: 0x07							
B7	B6	B5	B4	B3	B2	B1	B0
T3_SET[2]	T3_SET[1]	T3_SET[0]	T23_VSET[1]	T23_VSET[0]	T23_ISET[2]	T23_ISET[1]	T23_ISET[0]
1	0	1	1	1	1	1	1
r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w
T3_SET[2:0]	Temperature threshold for T3 000: -10 °C (for a default NTC resistor network) 001: 0 °C (for a default NTC resistor network) 010: 10 °C (for a default NTC resistor network) 011: 15 °C (for a default NTC resistor network) 100: 40 °C (for a default NTC resistor network) 101: 45 °C (for a default NTC resistor network) 110: 50 °C (for a default NTC resistor network) 111: 60 °C (for a default NTC resistor network)						
T23_VSET[1:0]	Charge termination feedback voltage for T23 temperature range 00: 2.0 V 01: 2.05 V 10: 2.075 V 11: 2.1 V						
T23_ISET[2:0]	Maximum fast charge current for T23 temperature range 000: 0% of resistor programmed current 001: 25% of resistor programmed current 010: 37.5% of resistor programmed current 011: 50% of resistor programmed current 100: 62.5% of resistor programmed current 101: 75% of resistor programmed current 110: 87.5% of resistor programmed current 111: 100% of resistor programmed current						

CG_CTRL4 Register Address: 0x08							
B7	B6	B5	B4	B3	B2	B1	B0
T4_SET[2]	T4_SET[1]	T4_SET[0]	T34_VSET[1]	T34_VSET[0]	T34_ISET[2]	T34_ISET[1]	T34_ISET[0]
1	1	1	1	0	0	1	1
r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w
T4_SET[2:0]	Temperature threshold for T4 000: -10 °C (for a default NTC resistor network) 001: 0 °C (for a default NTC resistor network) 010: 10 °C (for a default NTC resistor network) 011: 15 °C (for a default NTC resistor network) 100: 40 °C (for a default NTC resistor network) 101: 45 °C (for a default NTC resistor network) 110: 50 °C (for a default NTC resistor network) 111: 60 °C (for a default NTC resistor network)						
T34_VSET[1:0]	Charge termination feedback voltage for T34 temperature range 00: 2.0 V 01: 2.05 V 10: 2.075 V 11: 2.1 V						
T34_ISET[2:0]	Maximum fast charge current for T34 temperature range 000: 0% of resistor programmed current 001: 25% of resistor programmed current 010: 37.5% of resistor programmed current 011: 50% of resistor programmed current 100: 62.5% of resistor programmed current 101: 75% of resistor programmed current 110: 87.5% of resistor programmed current 111: 100% of resistor programmed current						

CG_CTRL5 Register Address: 0x09							
B7	B6	B5	B4	B3	B2	B1	B0
reserved	ENRECG	NOITERM	T40_VSET[1]	T40_VSET[0]	T40_ISET[2]	T40_ISET[1]	T40_ISET[0]
1	1	0	0	0	0	0	0
r	r/w	r/w	r/w	r/w	r/w	r/w	r/w
reserved							
ENRECG	Enable of automatic recharge based on battery voltage detected 0: disabled 1: enabled						
NOITERM	Disable charging termination based on low charge current detected 0: charging stops when low charge current is detected 1: charging continues when low charge current is detected						
T40_VSET[1:0]	Charge termination feedback voltage for T40 temperature range 00: 2.0 V 01: 2.05 V 10: 2.075 V 11: 2.1 V						
T40_ISET[2:0]	Maximum fast charge current for T40 temperature range 000: 0% of resistor programmed current 001: 25% of resistor programmed current 010: 37.5% of resistor programmed current 011: 50% of resistor programmed current 100: 62.5% of resistor programmed current 101: 75% of resistor programmed current 110: 87.5% of resistor programmed current 111: 100% of resistor programmed current						

CG_STATUS1 Register Address: 0x0A							
B7	B6	B5	B4	B3	B2	B1	B0
STATECG[3]	STATECG[2]	STATECG[1]	STATECG[0]	TOC[1]	TOC[0]	OCC	OTC
0	0	0	0	0	0	0	0
r	r	r	r	r	r	r	r
STATECG[3:0] Charger status indication: 0000: not used 0001: not used 0010: charger idle 0011: battery detection 0100: battery detection 0101: charging in precharge 0110: charging in fastcharge 0111: not used 1000: not used 1001: not used 1010: charging completed 1011: not used 1100: not used 1101: battery detection, wait for start charging 1110: not used 1111: not used							
TOC[1:0] Charger timeout indication 00: no timeout 01: precharge timeout 10: fastcharge timeout 11: no timeout							
OCC Overcurrent charger 0: no overcurrent detected 1: overcurrent detected							
OTC Overtemperature charger 0: no overtemperature detected 1: overtemperature detected							

CG_STATUS2 Register Address: 0x0B							
B7	B6	B5	B4	B3	B2	B1	B0
reserved	reserved	TS2_ZONE[2]	TS2_ZONE[1]	TS2_ZONE[0]	TS1_ZONE[2]	TS1_ZONE[1]	TS1_ZONE[0]
0	0	0	0	0	0	0	0
r	r	r	r	r	r	r	r
reserved[1:0]							
TS2_ZONE[2:0] Temperature zone reading for TS2 000: temperature zone 01 001: temperature zone 12 010: temperature zone 23 011: temperature zone 34 100: temperature zone 40 101: not used 110: not used 111: not used							
TS1_ZONE[2:0] Temperature zone reading for TS1 000: temperature zone 01 001: temperature zone 12 010: temperature zone 23 011: temperature zone 34 100: temperature zone 40 101: not used 110: not used 111: not used							

DCDC1_CTRL Register Address: 0x0C							
B7	B6	B5	B4	B3	B2	B1	B0
reserved	OC	OT	PG	ADENDCDC	reserved	ENMASK	EN
1	0	0	0	1	1	1	0
r	r	r	r	r/w	r	r/w	r/w
reserved							
OC	Overcurrent DCDC1 0: no overcurrent detected 1: overcurrent detected						
OT	Overtemperature DCDC1 0: no overtemperature detected 1: overtemperature detected						
PG	Power good of DCDC1 status 0: no output voltage power good 1: output voltage power good						
ADENDCDC	Enable output auto discharge of DCDC1 0: disabled 1: enabled						
reserved							
ENMASK	Enable external DCDC1 enable pin 0: external control off 1: external control on						
EN	Enable DCDC1 0: disabled 1: enabled						

DCDC2_CTRL Register Address: 0x0D							
B7	B6	B5	B4	B3	B2	B1	B0
reserved	OC	OT	PG	ADENDCDC	reserved	ENMASK	EN
1	0	0	0	1	1	1	0
r	r	r	r	r/w	r	r/w	r/w
reserved							
OC	Overcurrent DCDC2 0: no overcurrent detected 1: overcurrent detected						
OT	Overtemperature DCDC2 0: no overtemperature detected 1: overtemperature detected						
PG	Power good of DCDC2 status 0: no output voltage power good 1: output voltage power good						
ADENDCDC	Enable output auto discharge of DCDC2 0: disabled 1: enabled						
reserved							
ENMASK	Enable external DCDC2 enable pin 0: external control off 1: external control on						
EN	Enable DCDC2 0: disabled 1: enabled						

DCDC3_CTRL Register Address: 0x0E							
B7	B6	B5	B4	B3	B2	B1	B0
reserved	OC	OT	PG	ADENDCDC	reserved	ENMASK	EN
1	0	0	0	1	1	1	0
r	r	r	r	r/w	r	r/w	r/w
reserved							
OC	Overcurrent DCDC3 0: no overcurrent detected 1: overcurrent detected						
OT	Overtemperature DCDC3 0: no overtemperature detected 1: overtemperature detected						
PG	Power good of DCDC3 status 0: no output voltage power good 1: output voltage power good						
ADENDCDC	Enable output auto discharge of DCDC3 0: disabled 1: enabled						
reserved							
ENMASK	Enable external DCDC3 enable pin 0: external control off 1: external control on						
EN	Enable DCDC3 0: disabled 1: enabled						

FET1_CTRL Register Address: 0x0F							
B7	B6	B5	B4	B3	B2	B1	B0
TOFET1	OCFET1	OTFET1	PGFET1	WTFET1[1]	WTFET1[0]	ADENFET1	ENFET1
0	0	0	0	0	0	1	0
r	r	r	r	r/w	r/w	r/w	r/w
TOFET1	Timeout FET1, startup, overload 0: no timeout detected 1: timeout detected						
OCFET1	Overcurrent FET1 0: no overcurrent detected 1: overcurrent detected						
OTFET1	Overtemperature FET1 0: no overtemperature detected 1: overtemperature detected						
PGFET1	Power good of FET1 status 0: no output voltage power good 1: output voltage power good						
WTFET1[1:0]	Wait time for current limited timeout of FET1 00: 200 us minimum wait time 01: 800 us minimum wait time 10: 1600 us minimum wait time 11: 3200 us minimum wait time						
ADENFET1	Enable output auto discharge of FET1 0: disabled 1: enabled						
ENFET1	Enable FET1 0: disabled 1: enabled						

FET2_CTRL Register Address: 0x10							
B7	B6	B5	B4	B3	B2	B1	B0
TOFET2	OCFET2	OTFET2	PGFET2	WTFET2[1]	WTFET2[0]	ADENFET2	ENFET2
0	0	0	0	0	0	1	0
r	r	r	r	r/w	r/w	r/w	r/w
TOFET2 Timeout FET2, startup, overload 0: no timeout detected 1: timeout detected							
OCFET2 Overcurrent FET2 0: no overcurrent detected 1: overcurrent detected							
OTFET2 Overtemperature FET2 0: no overtemperature detected 1: overtemperature detected							
PGFET2 Power good of FET2 status 0: no output voltage power good 1: output voltage power good							
WTFET2[1:0] Wait time for current limited timeout of FET2 00: 200 us minimum wait time 01: 800 us minimum wait time 10: 1600 us minimum wait time 11: 3200 us minimum wait time							
ADENFET2 Enable output auto discharge of FET2 0: disabled 1: enabled							
ENFET2 Enable FET2 0: disabled 1: enabled							

FET3_CTRL Register Address: 0x11							
B7	B6	B5	B4	B3	B2	B1	B0
TOFET3	OCFET3	OTFET3	PGFET3	WTFET3[1]	WTFET3[0]	ADENFET3	ENFET3
0	0	0	0	0	0	1	0
r	r	r	r	r/w	r/w	r/w	r/w
TOFET3 Timeout FET3, startup, overload 0: no timeout detected 1: timeout detected							
OCFET3 Overcurrent FET3 0: no overcurrent detected 1: overcurrent detected							
OTFET3 Overtemperature FET3 0: no overtemperature detected 1: overtemperature detected							
PGFET3 Power good of FET3 status 0: no output voltage power good 1: output voltage power good							
WTFET3[1:0] Wait time for current limited timeout of FET3 00: 200 us minimum wait time 01: 800 us minimum wait time 10: 1600 us minimum wait time 11: 3200 us minimum wait time							
ADENFET3 Enable output auto discharge of FET3 0: disabled 1: enabled							
ENFET3 Enable FET3 0: disabled 1: enabled							

FET4_CTRL Register Address: 0x12							
B7	B6	B5	B4	B3	B2	B1	B0
TOFET4	OCFET4	OTFET4	PGFET4	WTFET4[1]	WTFET4[0]	ADENFET4	ENFET4
0	0	0	0	0	0	1	0
r	r	r	r	r/w	r/w	r/w	r/w
TOFET4 Timeout FET4, startup, overload 0: no timeout detected 1: timeout detected							
OCFET4 Overcurrent FET4 0: no overcurrent detected 1: overcurrent detected							
OTFET4 Overtemperature FET4 0: no overtemperature detected 1: overtemperature detected							
PGFET4 Power good of FET4 status 0: no output voltage power good 1: output voltage power good							
WTFET4[1:0] Wait time for current limited timeout of FET4 00: 200 us minimum wait time 01: 800 us minimum wait time 10: 1600 us minimum wait time 11: 3200 us minimum wait time							
ADENFET4 Enable output auto discharge of FET4 0: disabled 1: enabled							
ENFET4 Enable FET4 0: disabled 1: enabled							

FET5_CTRL Register Address: 0x13							
B7	B6	B5	B4	B3	B2	B1	B0
TOFET5	OCFET5	OTFET5	PGFET5	WTFET5[1]	WTFET5[0]	ADENFET5	ENFET5
0	0	0	0	0	0	1	0
r	r	r	r	r/w	r/w	r/w	r/w
TOFET5 Timeout FET5, startup, overload 0: no timeout detected 1: timeout detected							
OCFET5 Overcurrent FET5 0: no overcurrent detected 1: overcurrent detected							
OTFET5 Overtemperature FET5 0: no overtemperature detected 1: overtemperature detected							
PGFET5 Power good of FET5 status 0: no output voltage power good 1: output voltage power good							
WTFET5[1:0] Wait time for current limited timeout of FET5 00: 200 us minimum wait time 01: 800 us minimum wait time 10: 1600 us minimum wait time 11: 3200 us minimum wait time							
ADENFET5 Enable output auto discharge of FET5 0: disabled 1: enabled							
ENFET5 Enable FET5 0: disabled 1: enabled							

FET6_CTRL Register Address: 0x14							
B7	B6	B5	B4	B3	B2	B1	B0
TOFET6	OCFET6	OTFET6	PGFET6	WTFET6[1]	WTFET6[0]	ADENFET6	ENFET6
0	0	0	0	0	0	1	0
r	r	r	r	r/w	r/w	r/w	r/w
TOFET6 Timeout FET6, startup, overload 0: no timeout detected 1: timeout detected							
OCFET6 Overcurrent FET6 0: no overcurrent detected 1: overcurrent detected							
OTFET6 Overtemperature FET6 0: no overtemperature detected 1: overtemperature detected							
PGFET6 Power good of FET6 status 0: no output voltage power good 1: output voltage power good							
WTFET6[1:0] Wait time for current limited timeout of FET6 00: 200 us minimum wait time 01: 800 us minimum wait time 10: 1600 us minimum wait time 11: 3200 us minimum wait time							
ADENFET6 Enable output auto discharge of FET6 0: disabled 1: enabled							
ENFET6 Enable FET6 0: disabled 1: enabled							

FET7_CTRL Register Address: 0x15							
B7	B6	B5	B4	B3	B2	B1	B0
TOFET7	OCFET7	OTFET7	PGFET7	WTFET7[1]	WTFET7[0]	ADENFET7	ENFET7
0	0	0	0	0	0	1	0
r	r	r	r	r/w	r/w	r/w	r/w
TOFET7 Timeout FET7, startup, overload 0: no timeout detected 1: timeout detected							
OCFET7 Overcurrent FET7 0: no overcurrent detected 1: overcurrent detected							
OTFET7 Overtemperature FET7 0: no overtemperature detected 1: overtemperature detected							
PGFET7 Power good of FET7 status 0: no output voltage power good 1: output voltage power good							
WTFET7[1:0] Wait time for current limited timeout of FET7 00: 200 us minimum wait time 01: 800 us minimum wait time 10: 1600 us minimum wait time 11: 3200 us minimum wait time							
ADENFET7 Enable output auto discharge of FET7 0: disabled 1: enabled							
ENFET7 Enable FET7 0: disabled 1: enabled							

AD_CTRL Register Address: 0x16							
B7	B6	B5	B4	B3	B2	B1	B0
reserved	ADSTART	ADEOC	ENADREF	ADC[3]	ADC[2]	ADC[1]	ADC[0]
0	0	1	0	0	0	0	0
r	r/w	r	r/w	r/w	r/w	r/w	r/w
reserved							
ADSTART A/D converter conversion start, bit is set to 0 if conversion is completed 0: no conversion in progress, conversion completed 1: start conversion							
ADEOC A/D converter end of conversion 0: conversion not finished 1: conversion finished							
ENADREF Enable A/D converter reference voltage 0: disabled 1: enabled							
ADC[3:0] A/D converter input channel select 0000: VAC 0001: VBAT 0010: IAC 0011: IBAT 0100: IDCDC1 0101: IDCDC2 0110: IDCDC3 0111: IFET1 1000: IFET2 1001: IFET3 1010: IFET4 1011: IFET5 1100: IFET6 1101: IFET7 1110: not used 1111: not used							

AD_OUT1 Register Address: 0x17							
B7	B6	B5	B4	B3	B2	B1	B0
AD0	AD0	AD0	AD0	AD0	AD0	AD0	AD0
0	0	0	0	0	0	0	0
r	r	r	r	r	r	r	r
AD0[7:0] ADC result data [7:0]							

AD_OUT2 Register Address: 0x18							
B7	B6	B5	B4	B3	B2	B1	B0
reserved	reserved	reserved	reserved	reserved	reserved	AD0	AD0
0	0	0	0	0	0	0	0
r	r	r	r	r	r	r	r
reserved[5:0]							
AD0[9:8] ADC result data [9:8]							

SPARE2 Register Address: 0x1B							
B7	B6	B5	B4	B3	B2	B1	B0
OTP_RELOAD	SPARE2[6]	SPARE2[5]	SPARE2[4]	SPARE2[3]	SPARE2[2]	SPARE2[1]	SPARE2[0]
0	0	0	0	0	0	0	0
r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w
OTP_RELOAD Register reset, bit is set to 0 after reset 0: no reset 1: reset register content							
SPARE2[6:0] Spare user register cells							

3.3 ALWAYS ON LDO's

As soon as a valid voltage at VSYS is applied the LDO's start operating and providing a regulated output voltage at each of them. If DCDC1 is started the output of the DCDC1 converter will be connected to the output of LDO1 with an internal bypass switch to ensure seamless transition. Finally LDO1 will stop operating. It will start again when the voltage at its output drops below its regulation voltage. In this case both outputs will be disconnected from each other. There will be no current flowing backwards from the LDO1 output to the DCDC1 output. The same function is implemented for DCDC2 and LDO2.

3.4 POWER PATH CONTROL

The device automatically switches adapter or battery power to the system load. The battery is connected to the system by default during power up or if the adapter power is not available. As soon as a valid voltage is detected on VACS and the voltage at VAC is higher than the battery voltage the battery is disconnected and the AC power path switches controlled through the pins ACG and ACS are turned on. The system is powered through the adapter input. If the voltage on VACS is higher than the overvoltage protection threshold the AC power path switches are turned off or not turned on to protect the system from damage. Any voltage on VACS lower than the input undervoltage lockout threshold voltage will cause the AC power path switches to be off.

To protect the device and the system against reverse voltage additional external components are required to protect the pins VAC, VACS ACG and ACS which would be exposed to the reverse voltage. Please check the [EVM documentation](#) for more details.

In case the maximum adapter output current is not high enough to supply the complete system the system can be powered through the adapter and the battery at the same time. If the adapter current is limited the adapter voltage will drop to the battery voltage level and the backgate diode of the battery switch will conduct current.

To minimize the losses in this mode of operation the battery switch is turned on. To detect whether there is still a power source connected at the AC input the AC power path switches are turned off every 0.5 s for a few milliseconds. While the AC power path switches are off VAC is discharged through a 1 kΩ resistor to GND. If the voltage at VACS did not drop below the input undervoltage lockout threshold voltage the AC power path switches are turned on again to allow the power source connected to the AC input to supply the system again.

3.5 SUPPLY STATUS OUTPUTS

The status of the power supply is indicated through the status pins VACG, VBATG and VSYSG. All pins are open drain outputs and need a pull up resistor to the respective logic supply voltage they are connected to.

VACG will be high if a voltage is detected at VAC and VACS which is in a useable window. This means the voltage detected at VACS must be lower than the overvoltage threshold and it must be higher than the input undervoltage lockout threshold voltage. Also the voltage at VAC must be higher than battery voltage. If no battery is connected the minimum voltage is above the undervoltage lockout threshold.

VSYSG will be high as soon as the system voltage, detected at VSYS_L1 and VSYS_L2 is above its undervoltage thresholds.

VBATG will be high if the voltage detected at FBC is between the minimum and the maximum voltage for battery good detection and the differential voltage $V_{SRN} - V_{VBAT}$ is lower than 20 mV. This indicates that the battery discharge current is not exceeding the programmed maximum level.

3.6 CHARGER

Charging can be enabled by using the ENC pin or by programming the respective register through I2C. The charger will then start working when VACG is detected. If the battery is completely charged or charging has been terminated for any other reason, the charger will stay idle. Charging can be restarted by disabling the charger and enabling it again.

As soon as the charger is enabled it starts with battery detection as shown in [Figure 3-7](#). If no battery or a battery short is detected the charger will continue with battery detection. If the battery is detected it will start charging.

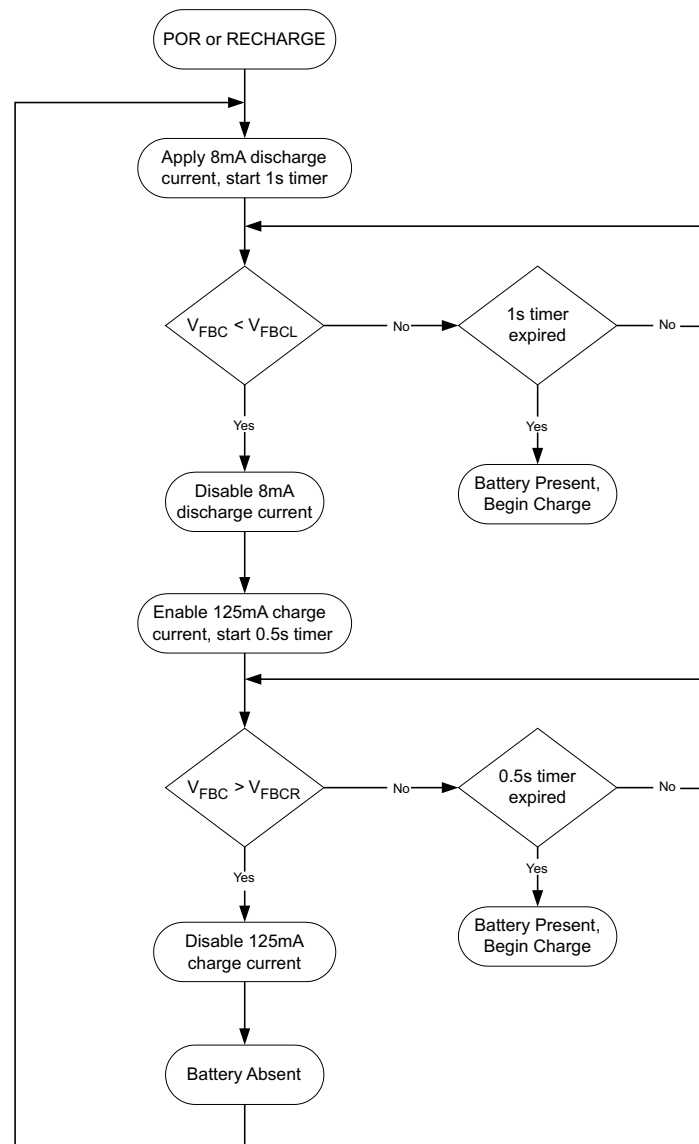


Figure 3-7. Battery Detection

The charger controls a low constant charge current during a precharge phase when the battery is at a very low voltage and needs to be recovered. It controls a high fastcharge current if the battery voltage is above the low voltage threshold and below the charge termination voltage. If the battery voltage has reached the charge termination voltage the charger controls this voltage until the charge current has decayed below the charge termination threshold or the fastcharge safety timer has timed out. Precharge current and charge termination current are either 10% of the programmed fastcharge current if the fastcharge current is set to 1A or higher. Otherwise they will be controlled to 100mA. A complete charging cycle is shown in [Figure 3-8](#).

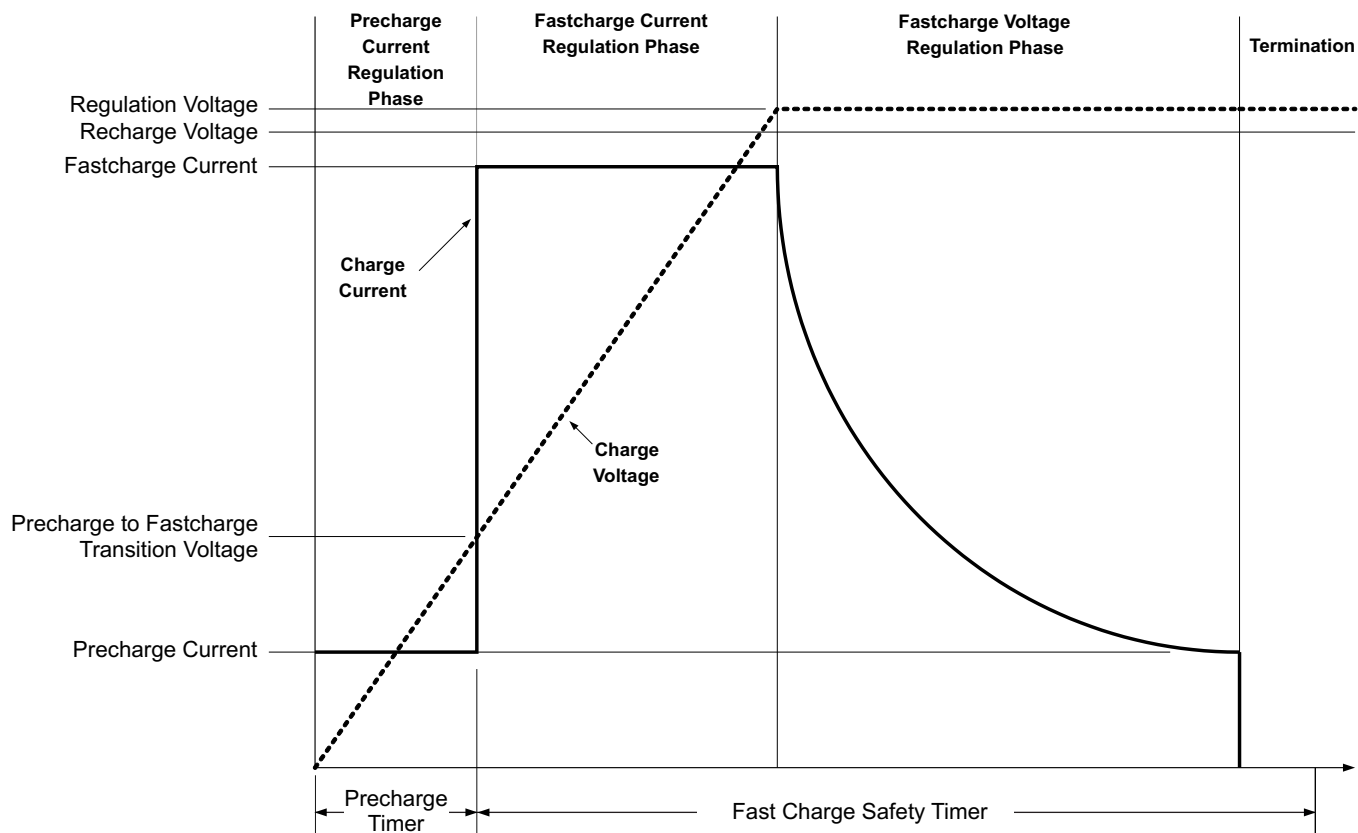


Figure 3-8. Charging Cycle

To support charging with weak power sources the charger stays in operation even if it can not control the charge current at the programmed level. For this operating condition the charge termination based on low charge current can be turned off by programming the respective register.

The fastcharge safety timer is programmed to its lowest value by default. The timeout time can be increased by programming higher values in the respective registers. It cannot be turned off.

All charge currents are defined depending on the current sense resistor connected between the pins SRN and SRP. The maximum fastcharge current generates a 40 mV voltage drop across this resistor. All other currents are lower.

The charge termination voltage is defined by a resistive voltage divider connected between battery, feedback input of the charger (FBC) and GND. The maximum voltage at FBC which is controlled is typically 2.1 V.

The charger has also inputs to measure the battery cell temperature. It supports using 2 different temperature sensors which can be placed at different locations in the battery pack. For more details on the temperature sensing circuit please refer to the applications section. For biasing the temperature sense resistor networks and the internal comparator reference the voltage at the VREFT pin is used. It is turned off if the charger is disabled.

Charge current and charge termination voltage can be programmed to lower than the maximum values using the digital interface. They are also controlled and forced to lower values depending on the measured battery cell temperature. The respective values for the 5 different temperature regions can be programmed in the charge control registers (CG_CTRLx) using the digital interface. Default settings for temperature thresholds and the respective fastcharge current and charge termination voltages are defined according to JEITA recommendations for multicell battery packs. The definitions for the thresholds and temperature

zones are shown in [Figure 3-9](#). [Figure 3-9](#) also shows the default values for temperature thresholds, charge current and charge termination voltage, which are programmed in TPS65090A. The optional values which can be programmed via the digital interface, can be found in the electrical characteristics table. The actual temperature zones the charger operates in, can be read out from the charge status register CG_STATUS1.

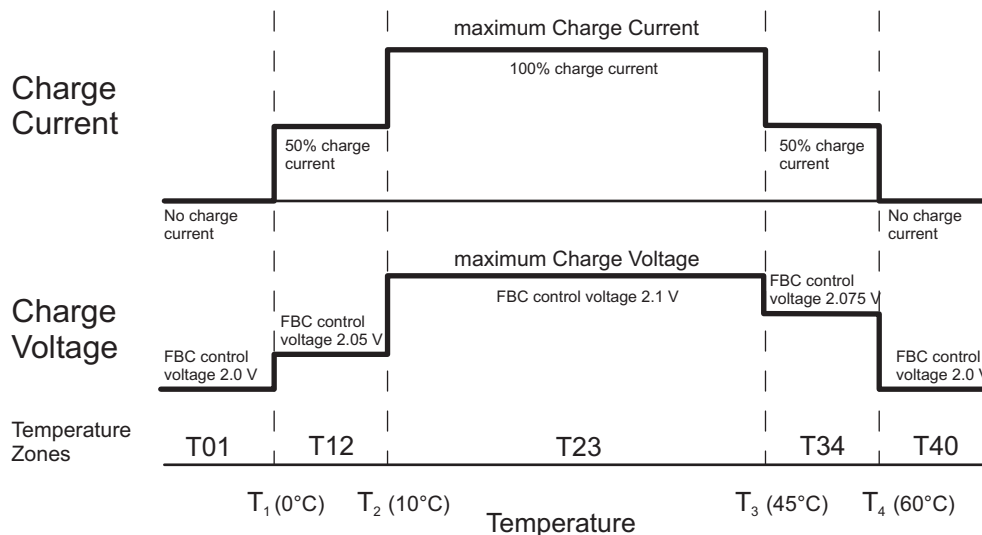


Figure 3-9. JEITA Charging Profile

If the adapter current measured with a sense resistor between the pins ACN and ACP exceeds its programmed value or the adapter voltage measured at VACS drops below a certain level (typically 7V, see electrical characteristics table) the charge current is reduced automatically to avoid an overload condition of the AC adapter and an undervoltage condition for the system. The charge current is also reduced if the charger temperature measured in the IC is exceeding 100°C.

The charger indicates its current status of operation in 2 different ways. One is the STAT output pin which can be used to drive an LED. It can have 3 different states as described in [Table 3-1](#). To get details about the current state of charging the charging status register CG_STATUS1 can be read.

Table 3-1. Charger status pin STAT

Charging State	STAT pin state
charging complete sleep mode charging disabled	HIGH
charging in progress (including recharging)	LOW
charging suspended no battery detected safety timer fault (precharge, fastcharge)	blinking with 0.5 Hz

A status change from charging suspended to charging active and back sets the interrupt CGACT and charging completed sets the interrupt CGCPL. Both interrupts can be masked. If not masked, they will trigger IRQ pin to go low when they are set.

3.7 DCDC CONVERTERS

The built in DCDC converters are completely integrated except the required passive components. To maintain high efficiency they are implemented as synchronous step down converters. At medium and heavy loads they are operating in a PWM mode. As soon as the inductor current gets discontinuous, which means that the output current gets lower than half of the inductor ripple current the converters enter Power Save Mode. In Power Save Mode the switching frequency decreases linearly with the load current maintaining high efficiency. The transition into and out of Power Save Mode happens within the entire regulation scheme and is seamless in both directions.

All DCDC converters can be enabled using their ENx pins. If they should be enabled using the digital interface the enable pin function can be masked in the DCDCx_CTRL register. If masked enable only works by writing a 1 to the EN bit in the DCDCx_CTRL register.

As soon as the output voltage reaches 80% of the input voltage the power good register bit for this converter is set to 1. If the output voltage drops below this threshold the power good bit is set back to 0.

The startup of the converter is controlled by an internal softstart to make sure the output voltage is built up smoothly and the inrush current during startup is kept at minimum.

All converters are current limited. The current limit is controlling the maximum output current. If the current limit is controlling the converter its respective OLDCDCx interrupt bits are set to 1. The OLDCDCx interrupt bits can be masked. If not masked, they will trigger IRQ pin to go low when they are set.

To make sure that the output voltage of the DCDC converters is decreasing fast to a safe low value a built in output auto discharge function can be enabled using the ADENDCDC bit in the respective DCDCx_CTRL register. If enabled the output capacitors are actively discharged as soon as the converter is disabled. While the converter is enabled its output discharge circuit is off to save power.

3.8 LOAD SWITCHES

Load switches are turned on using the digital control interface by writing a 1 in the ENFETx bit of their load switch control register FETx_CTRL. They can not be enabled before DCDC1 and DCDC2 have been started and their output voltage is above their power good level. If DCDC1 or DCDC2 will be disabled load switches will be immediately disabled as well and enabled if both DCDC converters are enabled again.

After being turned on the output voltage of the load switch is ramped up with a controlled slope ($< 1.0 \text{ V} / \mu\text{s}$). The current limit is active during that time and does not allow the current to overshoot. This means the slope can be slower if controlled by the current limit.

After being turned on a timer is started. If the timer terminates the output voltage must have reached the input voltage. Otherwise the load switch is turned off again expecting an overload condition. The minimum value of the timer is 200 μs . This timer is used as well if the load switch control limits the current. It can be extended via the digital control interface using 4 steps (max factor 16 up to 3 ms). If the load switch has been turned off by this safety timer it can only be turned on again by reprogramming its ENFETx bit to 1 again.

As soon as the output voltage reaches 80% of the input voltage the power good register bit for this load switch is set to 1. If the output voltage drops below this threshold the power good bit is set back to 0.

All load switches are current limited. The current limit is regulating the maximum output current. A temperature sensor can trigger the turn off of the load switch as well. If the current limit is controlling the switch their respective OLFETx interrupt bits are set to 1. The OLFETx interrupt bits can be masked. If not masked, they will trigger IRQ pin to go low when they are set.

To make sure that a voltage on the output of FET2 is not supplying its input while turned off it is reverse current protected. This feature is only available at FET2 to support controlling circuit blocks which can get power from an external source while the system is turned off, like HDMI.

To make sure that the output voltage of the load switches is decreasing fast to a safe low value a built in output auto discharge function can be enabled using the ADENFETx bit in the respective FETx_CTRL register. If enabled the output capacitors are actively discharged as soon as the load switch is disabled. While the load switch is enabled its output discharge circuit is off to save power.

3.9 A/D CONVERTER

A/D conversion is controlled according to the flowchart shown in Figure 3-10. After enabling the A/D converter the channel which should be measured must be defined in the A/D converter control register. A/D conversion is started by writing the start command in the A/D control register. As soon as conversion is finished ADEOC is set to 1 and the data is available in the ADOUT registers.

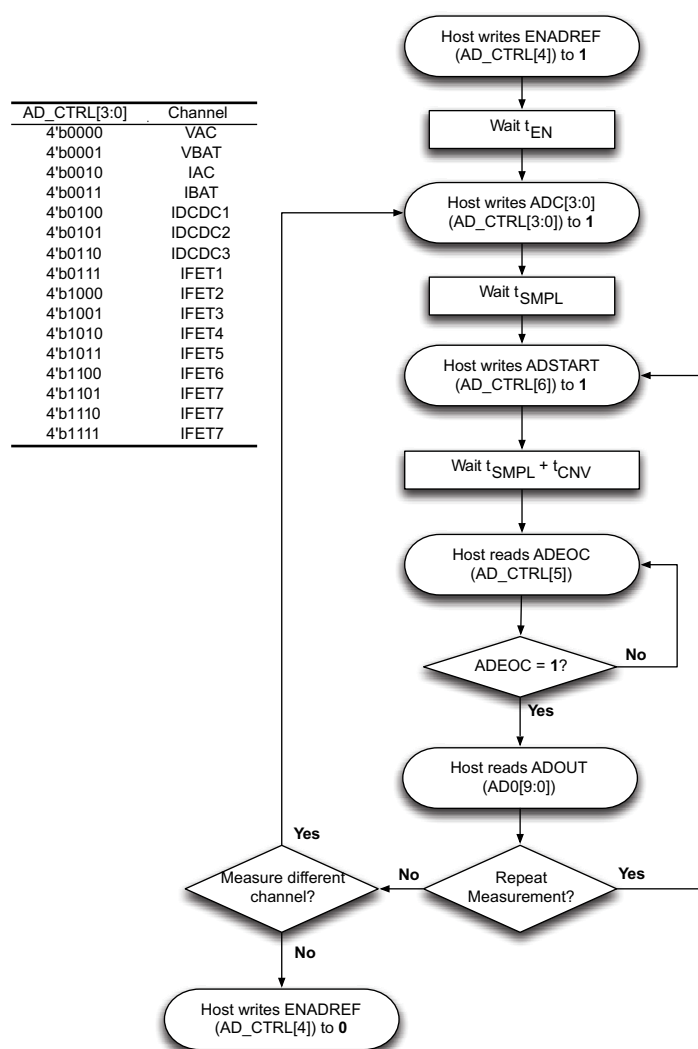


Figure 3-10. A/D Conversion

3.10 PROTECTION

The device has 2 built in under voltage detectors. If the system voltage is not high enough to safely operate the DCDC converters they are shut down with the higher undervoltage threshold which also sets VSYSG high as soon as the system voltage has increased above this threshold. At this condition the LDO's are still on to supply the internal control circuitry. If the system voltage further decreases and hits the second lower undervoltage threshold the LDO's are turned off as well and the internal control circuit is disabled. The control circuit is reset and started again if the supply voltage increases above the lower undervoltage threshold.

The device has a built-in temperature sensor which monitors the internal IC temperature. If the temperature exceeds the programmed threshold (see electrical characteristics table) the device stops operating. As soon as the IC temperature has decreased below the programmed threshold, it starts operating again. There is a built-in hysteresis to avoid unstable operation at IC temperatures at the overtemperature threshold.

3.11 INTERRUPTS

The device monitors several internal states of power path, charger, DCDC converters and load switches. If any of those states changes, an interrupt can be asserted. By default all states are masked, so any state which should generate an interrupt needs to be unmasked. If an unmasked state changes it will generate an interrupt, which means the output impedance of the IRQ pin will go low and, if properly connected the voltage will go low. What has caused the interrupt can be read out from the interrupt status registers IRQ1 and IRQ2. The interrupt will be cleared by writing a zero to the IRQ bit in the interrupt status register IRQ1. The content of the status registers are refreshed only after an interrupt has occurred.

3.1 APPLICATION INFORMATION

3.1.1 DESIGN PROCEDURE

The TPS65090A Front-end PMU Integrated circuit is intended for systems powered by a two or three-cell Li-Ion or Li-Polymer battery with a typical voltage between 6 V and 17 V. Additionally, any other voltage source with a typical output voltage between 6 V and 17 V can power systems where the TPS65090A is used.

3.1.2 PROGRAMMING THE CONVERTER OR CHARGER OUTPUT VOLTAGE

Within the TPS65090A device, there are fixed and adjustable outputs. In the case where the voltage is adjustable, an external resistor divider is used to set the output voltage. The resistor divider must be connected between the output, the feedback pin and GND. When the output voltage is regulated properly, the voltage at the feedback pin will be in the range as defined in the electrical characteristics, i.e. 800 mV for DCDC3 and 2.1 V for the charger. The feedback pin typically has 0.1 μ A of leakage; to meet this current requirement and maintain the feedback voltage, it is recommend to set the feedback divider current by at least a factor of ten to one-hundred times that of the pin leakage. Using the feedback voltage of 2.1 V and 10 μ A ($100 \times 0.1 \mu\text{A}$), the resistor between the feedback pin and GND can be calculated to need to be less than 210k Ω . This value for the resistor will provide sufficient current through the resistor divider at the typical feedback voltage. Selecting resistor values is a trade off between noise immunity and light load efficiency. The lower the resistor value, the higher the noise immunity; however, the more current through the resistor, the less efficient the converter is at light loads. Consider R1 is connected from the output of the inductor to the feedback pin and R2 from the feedback pin to ground. From the recommendations for R2, less than 210k Ω , the value of the resistor connected between the output and feedback, R1, depending on the desired output voltage V_{OUT} , can be calculated using [Equation 1](#).

$$R1 = R2 \cdot \left(\frac{V_{\text{OUT}}}{V_{\text{FB}}} - 1 \right) \quad (1)$$

The following table contains recommended values for the feedback divider for the most common output voltages.

Table 3-1. Feedback Resistor Values for Common Converter Output Voltages

Output Voltage	1.2 V	1.35 V	1.8 V	3.3 V
R1 [k Ω]	260	330	510	750
R2 [k Ω]	510	470	400	240

Table 3-2. Feedback Resistor Value for Common Charger Output Voltages

Output Voltage	8.4 V	12.6 V
R1 [k Ω]	330	1100
R2 [k Ω]	110	220

3.1.3 PROGRAMMING INPUT DPM CURRENT AND CHARGE CURRENT

Maximum input DPM current and charge current are defined by the values of the sense resistors used. The sense resistor value RS can be calculated using [Equation 2](#).

$$RS = \frac{V_s}{I_s} \quad (2)$$

V_s is the differential voltage at the sense input pins, for input current DPM it is the differential voltage between ACP and ACN and for charge current regulation between SRP and SRN. The maximum value for the differential voltage which is recommended to be used here is 40 mV. More details can be found in the electrical characteristics section of power path control and charger.

I_S is the maximum current which needs to be controlled, for input current DPM it is the maximum input current where charging is still allowed and for charge current regulation it is the maximum charge current.

3.1.4 OUTPUT FILTER DESIGN (INDUCTOR AND OUTPUT CAPACITOR)

The external components have to fulfill the needs of the application, but also the stability criteria of the devices control loop. The TPS65090A is optimized to work within a range of L and C combinations. The LC output filter inductance and capacitance have to be considered together, creating a double pole, responsible for the corner frequency of the converter.

3.1.5 INDUCTOR SELECTION

At the L pins of the DCDC converters and the charger, connecting an inductor is required.

At the DCDC converters it is recommended to use a 2.2 μH inductor with an appropriate current rating for the application. The derated inductance at high currents should not drop lower than 1 μH .

At the charger it is recommended to use a 2.2 μH inductor for fast charge currents of 3 A and above. For lower fast charge currents, 3.3 μH can be used. The current rating of the inductor must be suitable for the maximum fast charge current required in the application.

The inductor value affects its peak-to-peak ripple current, the PWM-to-PSM transition point, the output voltage ripple and the efficiency. The selected inductor has to be rated for its DC resistance and saturation current. The inductor ripple current decreases with higher inductance and increases with higher V_{IN} or V_{OUT} .

To properly configure the converter, an inductor must be connected between pin L the output capacitors. To estimate the inductance value, Equation 3 can be used.

$$L = (V_{IN} - V_{OUT}) \cdot 0.5 \cdot \frac{\mu\text{S}}{\text{A}} \quad (3)$$

In Equation 3, the minimum inductance value, L , is calculated. V_{IN} is the minimum input voltage. As an example, a suitable inductor for generating 1.35V from a two-cell Li-Ion battery is 2.2 μH .

With the chosen inductance value, the peak current for the inductor in steady state operation can be calculated. Equation 4 shows how to calculate the peak current I_{MAX} in step down mode operation.

$$I_{MAX} = \frac{I_{OUT}}{0.8} + \frac{V_{OUT} \cdot (V_{IN} - V_{OUT})}{2 \cdot V_{IN} \cdot f \cdot L} \quad (4)$$

In the equation, f is the minimum switching frequency, which typically is in the range of 1 MHz. V_{IN} is the minimum input voltage. The critical current value for selecting the right inductor is the value of I_{MAX} . Consideration must be given to the load transients and error conditions that can cause higher inductor currents. This must be taken into consideration when selecting an appropriate inductor.

In DC/DC converter applications, the efficiency is essentially affected by the inductor AC resistance (i.e. quality factor) and by the inductor DCR value. To achieve high efficiency operation, care should be taken in selecting inductors featuring a quality factor above 25 at the switching frequency. Increasing the inductor value produces lower RMS currents, but degrades transient response. For a given physical inductor size, increased inductance usually results in an inductor with lower saturation current.

The following inductor types from different suppliers have been used with TPS65090 converters:

Table 3-3. List of Inductors

VENDOR	INDUCTOR SERIES
Coilcraft	XAL4020-222, XAL5030-222
Cyntec	PILE061E-2R2MS-11

Table 3-3. List of Inductors (continued)

VENDOR	INDUCTOR SERIES
Toko	FDV0530-2R2M
Würth Elektronik	WE 74437324022

3.1.6 CAPACITOR SELECTION

3.1.6.1 Input Capacitor

Because of the nature of the switching converter and charger with a pulsating input current, a low ESR input capacitor is required for best input voltage filtering and minimizing the interference with other circuits caused by high input voltage spikes. For most applications, at least 10µF ceramic capacitor is recommended. The voltage rating and DC bias characteristic of ceramic capacitors need to be considered. The input capacitor can be increased without any limit for better input voltage filtering. A ceramic capacitor placed as close as possible to the respective VSYS and PGND pins of the IC is recommended.

3.1.6.2 DCDC Converter and Charger Bootstrap Capacitors

To make sure that the internal high side gate drivers are supplied with a stable low noise supply voltage, a capacitor must be connected between the CBx pins and the respective Lx pins.

Using a ceramic capacitor with a value of 4700 pF is recommended. The value of this capacitor should not be lower than 2200 pF or higher than 0.01 µF. For testing, a 4700 pF, size 0402, 6.3 V capacitor was used.

3.1.6.3 DCDC Converter and Charger Output Capacitors

Ceramic capacitors with low ESR values provide the lowest output voltage ripple and are recommended. The output capacitor requires either an X7R or X5R dielectric. Y5V and Z5U dielectric capacitors, aside from their wide variation in capacitance over temperature, become resistive at high frequencies.

At light load currents, the converter operates in Power Save Mode and the output voltage ripple is dependent on the output capacitor value and the PFM peak inductor current. Higher output capacitor values minimize the voltage ripple in PFM Mode and tighten DC output accuracy in PFM Mode. In order to achieve specified regulation performance and low output voltage ripple, the DC-bias characteristic of ceramic capacitors must be considered. The effective capacitance of ceramic capacitors drops with increasing DC - bias voltage.

For the output capacitors of the DCDC converters and the charger use of a small ceramic capacitors placed as close as possible to the output pins and the respective PGND pins of the IC is recommended. If, for any reason, the application requires the use of large capacitors which can not be placed close to the IC, use a smaller ceramic capacitor in parallel to the large capacitor. The small capacitor should be placed as close as possible to the output pins and the respective PGND pins of the IC.

At the DCDC converters the capacitance close to the IC is recommended to be close to 22 µF. It should not be lower than 10 µF or higher than 47 µF.

At the charger 22 µF capacitance is recommended.

To get an estimate of the recommended minimum output capacitance, [Equation 5](#) can be used.

$$C_{OUT} \geq \frac{22 \cdot \mu F \cdot \mu H}{L} \quad (5)$$

A capacitor with a value in the range of or higher than the calculated minimum should be used. This is required to maintain control loop stability.

3.1.6.4 LDO Output Capacitors

To achieve stable and accurate output voltage regulation of the LDO's, a small ceramic capacitor is required at their outputs. It is recommended to use at least 2.2 μF .

3.1.6.5 Load Switches Output Capacitors

The maximum expected output capacitance at the load switches is 47 μF . Any lower value can be used.

3.1.7 CHARGER BATTERY TEMPERATURE SENSING

To measure the battery cell temperature, resistors with temperature dependent resistance (NTC) need to be placed close to the cells which need to be measured. The device supports using two independent measuring points with its TS1 and TS2 input pins. The temperature sense resistor and the linearizing resistor network must be the same. If only one temperature sense resistor is used, the sense resistor network must be connected to TS1 and TS2.

As a default, the internal circuit is optimized to work with a 10 k Ω NTC resistor with a temperature characteristic described with a B value in the range of 3450 with one resistor in parallel and one resistor in series for linearization and to define the resistor divider connected to VREFT, TSx and AGND. A possible default example would be NTCS0805E3103FLT from Vishay in parallel with a 6.8 k Ω resistor and a 2.2 k Ω resistor in series.

3.1.8 REVERSE VOLTAGE PROTECTION

To protect the design against reverse voltage at the AC adapter input, additional external components are required. The pins VAC, VACS and the input path switches are exposed to the negative voltage and need some protection.

To protect the VAC pin, using a small signal diode between the adapter input and the VAC pin is recommended.

Protecting VACS can be done either by connecting this pin to the protected VAC with the tradeoff of losing accuracy or connecting VACS to the adapter input with a 10 k Ω resistor.

To make sure that the AC switches are not turned on with the reverse voltage at the AC adapter input, a small signal n-channel FET can be used to short the voltage at ACG to ACS. The source of this FET must be connected to ACS, the drain to ACG. The gate must be connected to the AC adapter input GND either direct or, if the maximum gate voltage rating does not match the maximum input voltage, with a resistor divider between AC adapter input GND and ACS. An example for the small signal FET would be BSS138W-7-F. To protect the ACS and the ACG pin resistors with values in the range of 4.7 k Ω or higher between the pins and the gate and source pins of the AC FET's must be used.

An example for this additional reverse protection circuit can be found in the [TPS65090EVM User's Guide](#).

3.1.9 AC SWITCHES

The AC adapter protection switches are recommended as CSD17304Q3: MOSFET, NChan, 30V, 56A, 9.8 milliOhm.

3.1.10 BATTERY SWITCHES

The battery switches are recommended as CSD25401Q3: MOSFET, PChan, -20V, 60A, 8.7 milliOhm.

3.1.11 LAYOUT CONSIDERATIONS

For all switching power supplies, the layout is an important step in the design, especially at high peak currents and high switching frequencies. If the layout is not carefully done, the regulator could show stability problems as well as EMI problems. Therefore, use wide and short traces for the main current path and for the power ground tracks. The input capacitor, output capacitor, and the inductor should be placed as close as possible to the IC. Use a common ground node for power ground and a different one for control ground to minimize the effects of ground noise. Connect these ground nodes at any place close to one of the ground pins of the IC.

The feedback divider should be placed as close as possible to the control ground pin of the IC. To lay out the control ground, short traces are recommended as well, separation from the power ground traces. This avoids ground shift problems, which can occur due to superimposition of power ground current and control ground current.

A layout example can be found in the [TPS65090EVM User's Guide](#).

3.1.12 THERMAL INFORMATION

Implementation of integrated circuits in low-profile and fine-pitch surface-mount packages typically requires special attention to power dissipation. Many system-dependent issues such as thermal coupling, airflow, added heat sinks and convection surfaces, and the presence of other heat-generating components affect the power-dissipation limits of a given component.

Three basic approaches for enhancing thermal performance are listed below.

- Improving the power dissipation capability of the PCB design
- Improving the thermal coupling of the component to the PCB by soldering the PowerPAD™
- Introducing airflow in the system

For more details on how to use the thermal parameters in the dissipation ratings table please check the [Thermal Characteristics Application Note \(SZZA017\)](#) and the [IC Package Thermal Metrics Application Note \(SPRA953\)](#).

Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Original (January 2013) to Revision A	Page
<ul style="list-style-type: none"> Added Differential Voltage spec condition "between CBC and LC", –0.3 MIN and 7 MAX Changed graph title from "ADAPTER INPUT POWER UP AND POWER DOWN" to "SUPPLEMENT MODE OPERATION" Changed text in ALWAYS ON LDOs and POWER PATH CONTROL sections for clarification. Changed text in CHARGER section for clarification. Added INTERRUPTS section for clarification. Added text to REVERSE VOLTAGE PROTECTION section for clarification. Added text to THERMAL INFORMATION section for clarification. 	4 30 49 51 55 59 60

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPS65090ARVNR	ACTIVE	VQFN	RVN	100	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	TPS65090A	Samples
TPS65090ARVNT	ACTIVE	VQFN	RVN	100	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	TPS65090A	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS65090ARVNR	VQFN	RVN	100	2500	330.0	16.4	9.3	9.3	1.5	12.0	16.0	Q2
TPS65090ARVNT	VQFN	RVN	100	250	180.0	16.4	9.3	9.3	1.5	12.0	16.0	Q2

TAPE AND REEL BOX DIMENSIONS




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS65090ARVNR	VQFN	RVN	100	2500	367.0	367.0	38.0
TPS65090ARVNT	VQFN	RVN	100	250	210.0	185.0	35.0

RVN (S-PVQFN-N100)

PLASTIC QUAD FLATPACK NO-LEAD

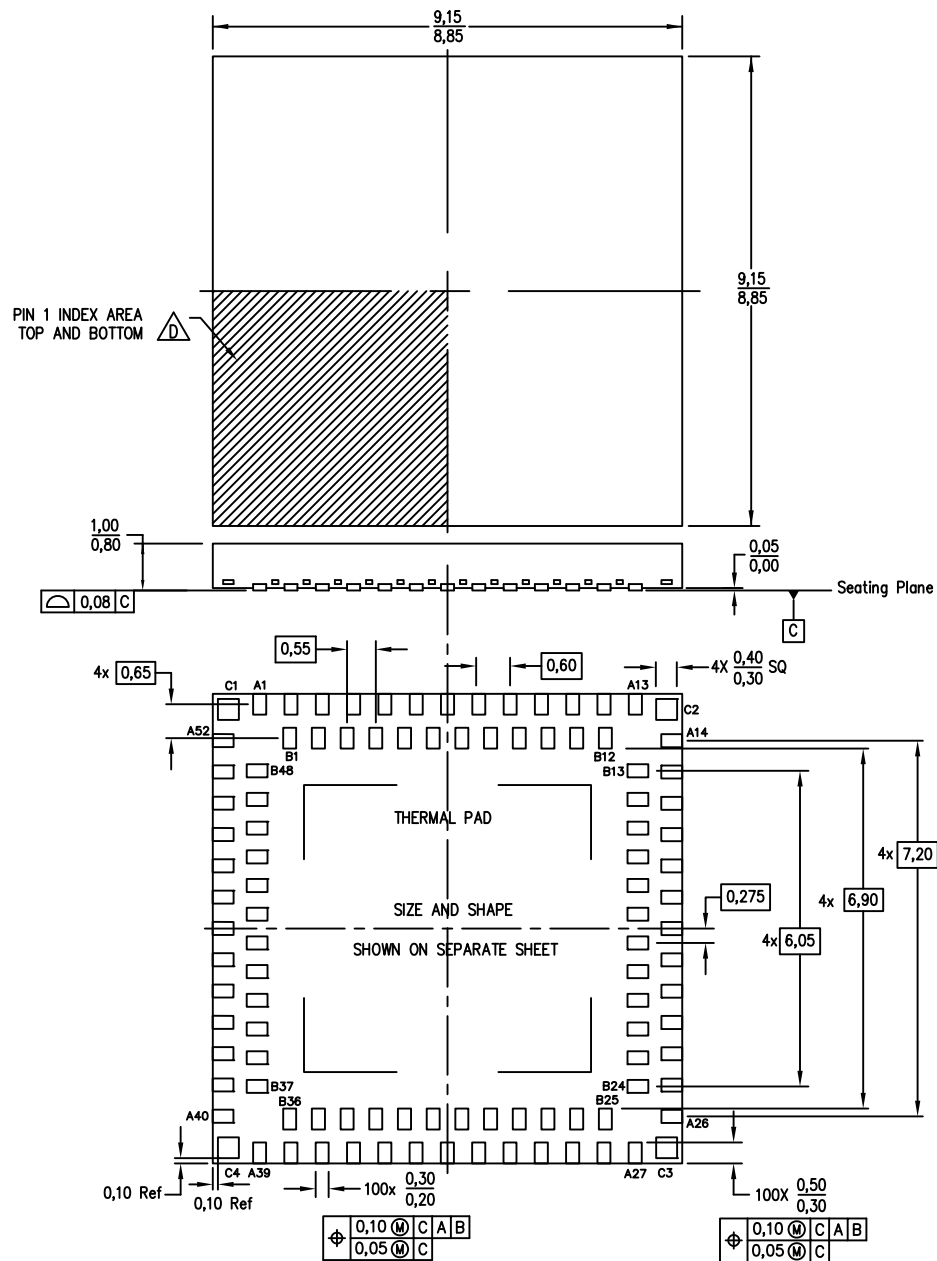

4212017/D 10/13

- NOTES:
- All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - This drawing is subject to change without notice.
 - Quad Flatpack, No-leads (QFN) staggered multi-row package configuration.
 - Pin A1 identifiers are located on both top and bottom of the package and within the zone indicated. The Pin A1 identifiers are either a molded, marked, or metal feature.
 - The package thermal pad must be soldered to the board for thermal and mechanical performance.
 - See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.

RVN (S-PVQFN-N100)


PLASTIC QUAD FLATPACK NO-LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

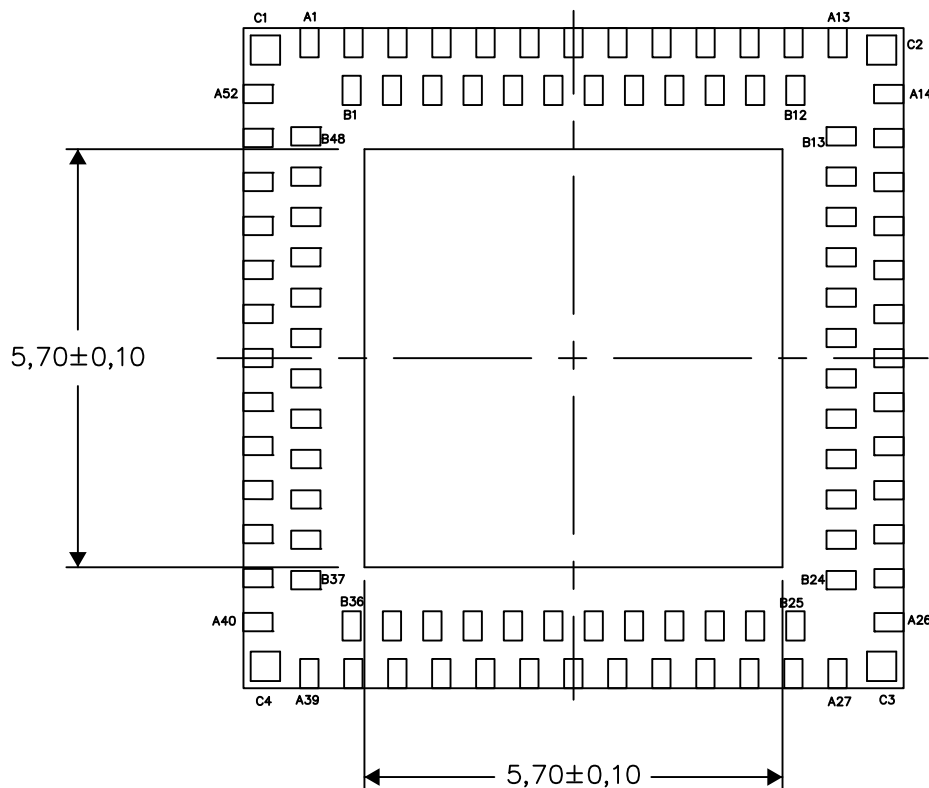

Bottom View

Exposed Thermal Pad Dimensions

4212047-3/D 04/13

NOTE: All linear dimensions are in millimeters

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com