




Epoxy coated interchangeable chip thermistors with bare tinned copper lead-wires.

- Precision, solid state temperature sensor
- Interchangeability down to $\pm 0.1^\circ\text{C}$
- Suitable for use over the range of -80°C to 150°C
- High sensitivity greater than $-4\%/^\circ\text{C}$ at 25°C
- Suitable for temperature measurement, control and compensation
- High reliability and stability over interchangeable range
- Most popular R-vs-T curves are available
- Resin coated for good mechanical strength and resistance to solvents
- .012" (.3 mm) dia. bare tinned copper lead-wires

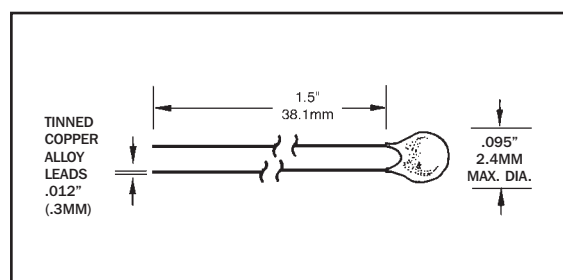

R25°C	MATERIAL SYSTEM	± .1°C 0°C to 70°C	± .2°C 0°C to 70°C	± .2°C 0°C to 100°C
2000	F	DC95F202V	DC95F202W	DC95F202Z
2252	F	DC95F232V	DC95F232W	DC95F232Z
3000	F	DC95F302V	DC95F302W	DC95F302Z
5000	F	DC95F502V	DC95F502W	DC95F502Z
10000	F	DC95F103V	DC95F103W	DC95F103Z
10000	Y	DC95Y103V	DC95Y103W	DC95Y103Z
30000	H	DC95H303V	DC95H303W	DC95H303Z
50000	G	DC95G503V	DC95G503W	DC95G503Z
100000	Y	DC95Y104V	DC95Y104W	DC95Y104Z
100000	G	DC95G104V	DC95G104W	DC95G104Z

- Other resistance values in the range of 100Ω - 100kΩ
- Other tolerances or ranges
- Alternative lead-wires or lengths
- Non standard R-vs-T curves
- Controlled dimensions

Maximum power at 25°C75mW
(derated from 100% at 25°C to 0% at 100°C)