

RIDERSERIES RCIKIT 24VDC 2CO LD/FG

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com



- Coupling relay with positively driven contacts: for monitoring signals within safety-critical circuits
- Relays with positively driven contacts have a 99% diagnostics coverage and an excellent reputation for use in safety systems.
- The contacts interlock with each other in order to ensure a synchronous switching status between both contacts. This guarantees that the alert contact will maintain the same switching status in the event of an error (for example, if the working contact melts from an overload).

General ordering data

Type	RCIKIT 24VDC 2CO LD/FG
Order No.	1218410000
Version	RIDERSERIES, Relay module with positively driven contacts, No. of contacts: 2, CO contact, AgCuNi, Rated control voltage: 24 V DC, Continuous current: 6 A, Screw connection
GTIN (EAN)	4050118002416
Qty.	10 pc(s).

RIDERSERIES
RCIKIT 24VDC 2CO LD/FG

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	15.5 mm	Height	77 mm
Depth	62 mm	Net weight	60 g

Temperatures

Humidity	40 °C / 95 % rel. humidity, no condensation	Operating temperature	-40 °C...+70 °C
Storage temperature	-40 °C...+85 °C		

Input

Protective circuit	Integrated free-wheel diode	Rated control voltage	24 V DC
Rated current DC	35.8 mA	Coil resistance	720 Ω
Power rating	0.82 W	Pull-in (sparkover) drop-out voltage DC coil	18 V / 2.4 V
Status indicator	Green LED		

Output

Rated switching voltage	250 V AC	Max. switching voltage, AC	250 V
Max. switching voltage, DC	250 V	Continuous current	6 A
Inrush current	15 A / 20 ms	Max. switching power	1500 VA
Switch-on delay	≤ 12 ms	Switch-off delay	≤ 6 ms
Min. switching power	100 mA / 5 V, 10 V / 10 mA, 24 V / 1 mA	Max. switching frequency at rated load	20 Hz

Contact specifications

No. of contacts	2	Contact design	CO contact
Contact material	AgCuNi	Mechanical service life	> 50 x 10 ⁶ switching cycles

general data

Wire connection method	Screw connection	Humidity	40 °C / 95 % rel. humidity, no condensation
UL 94 flammability rating	V-1		

Insulation coordination

Creepage and clearance distance input – output	≥ 10 mm	Dielectric strength input – output	5 kV _{eff} / 1min
Dielectric strength, contact contact	4 kV _{eff} / 1 min	Rated voltage	250 V
Pollution severity	3	Surge voltage category	III

Other technical data

Protective circuit	Integrated free-wheel diode	Status indicator	Green LED
--------------------	-----------------------------	------------------	-----------

Further details of approvals / standards

Standards	DIN EN 50205
-----------	--------------

RIDERSERIES
RCIKIT 24VDC 2CO LD/FG**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Connection data**Clamping range, rated connection 2.5 mm²Clamping range, rated connection, min. 0.5 mm²Clamping range, rated connection, max. 2.5 mm²

Wire connection method Screw connection

Classifications

ETIM 3.0

EC001437

UNSPSC

30-21-18-01

eClass 5.1

27-37-16-01

eClass 6.2

27-37-16-01

eClass 7.1

27-37-16-01

Approvals

Approvals



ROHS

Conform

Downloads

Declaration of Conformity


[K354_09_10.pdf](#)

RIDERSERIES RCIKIT 24VDC 2CO LD/FG


Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

DC version

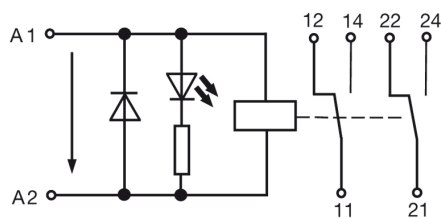

Connection diagram

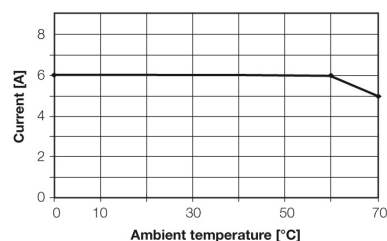

Derating curve