
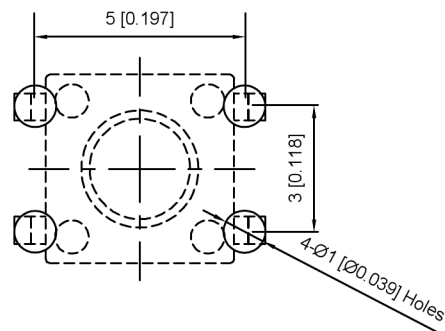


Code-x	H
A	3.8
B	4.3
C	4.5
D	5.0
E	5.5
F	6.0
G	6.5
H	7.0
I	7.5
J	8.0
K	8.5
L	9.0

The following soldering patterns are recommended for reflow soldering

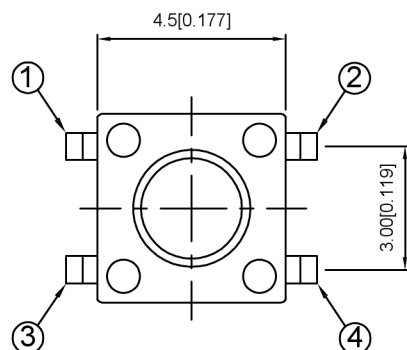

Contact Rating:	50mA,12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

PAPT NO	TC-11 09-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	Code-X

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

小三井科技股份有限公司						ANGLAR	±5°
ΔX		日期				L ≤ 4	±0.2
ΔX		期				4 < L ≤ 16	±0.3
ΔX						16 < L ≤ 63	±0.4
MARK		DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5
文件工程章						UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn							

XKLE

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH		
DWN		VIEW: 	PART NO.: TC-1109-X-X		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4			
PRECISION CO., LIMITED			WEIGHT	SHEET	REVISI
				1/1	A0