

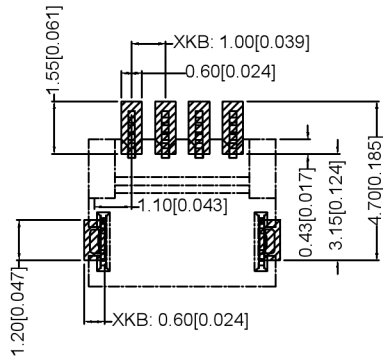
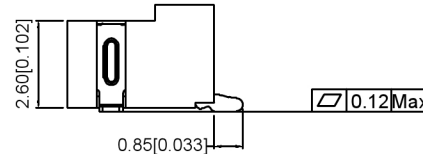







Recommended P.C.B. Layout
Total tolerance:±0.05mm



Specifications:

规格:

Voltage rating: 125V AC/DC

额定电压: 125V AC/DC

Current rating: 1A AC / DC

额定电流: 1A AC / DC

Withstanding voltage: 500V AC/minute

耐压电压: 500V AC/minute

Temperature range:-25℃~+85℃

温度范围: -25℃~+85℃

Insulation resistance:≥100MΩ

绝缘电阻: ≥100MΩ

Contact resistance: ≤20mΩ

接触电阻: ≤20mΩ

After environmental testing:≤40mΩ

环境测试后: ≤40mΩ

X1002 W R S- XX B1- 9T SN

① ②③④ ⑤ ⑥ ⑦ ⑧

①Series No.

②Category: W-wafer

③Welding Board Angle: R-Right Angle 90°

④Welding Way: S-SMT

⑤Row No.-Pin No.:XX-02P~20P

⑥Plug the Pin & Special NO.:

B1-Pad、On both sides of the middle position

⑦Material:9T-PA9T 94V-0

⑧Planting Category:SN-Bright tin plating 70" Min.

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2	3.55	2.50	12	13.55	12.50
3	4.55	3.50	13	14.55	13.50
4	5.55	4.50	14	15.55	14.50
5	6.55	5.50	15	16.55	15.50
6	7.55	6.50	16	17.55	16.50
7	8.55	7.50	17	18.55	17.50
8	9.55	8.50	18	19.55	18.50
9	10.55	9.50	19	20.55	19.50
10	11.55	10.50	20	21.55	20.50
11	12.55	11.50			

X1002WRS-XXB1-9TSN	PA9T 94V-0	X1002T-B1
PART NO	Material	Suitable XKB Terminal

DSND		DATE		SCALE: N/A	MODEL TYPE: 1.00 mm Crimp Style Connectors		
DWN		DATE		VIEW: 	PART NO.: X1002WRS-XXB1-9TSN		
CHKD		DATE		UNIT: mm/in	DWG NO.: X-X1002WRS-XXB1-9TSN		
APPD		DATE		SIZE: A4			
XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
						1/1	A0

广东星坤科技股份有限公司	
Δx	日期
Δx	日期
Δx	日期
MARK	DESCRIPTION
文件工程章	

					ANGLAR	±5°
					L≤ 4	±0.2
					4<L≤ 16	±0.3
					16<L≤ 63	±0.4
					L> 63	±0.5
					UNSPECIFIED TOLERANCES	

