



接触电阻: $\leq 30\text{m}\Omega$ Max

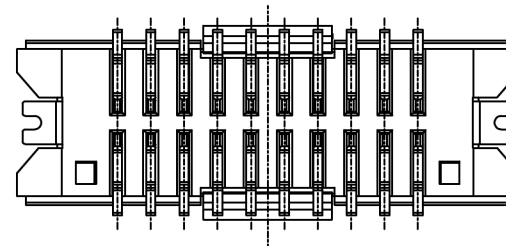

- 1.Series No
- 2.Category:W-Wafer
- 3.Welding Board Angle:V-Stright 180°
- 4.Welding Way:S-SMT
- 5.Row No.Pin No:XX-2x05~2x25P
- 6.Material:9T-PA9T UL 94V-0 Natural
CAP:PA9T UL 94V-0 Natural
- 7.Plating:V01-Gold Flash

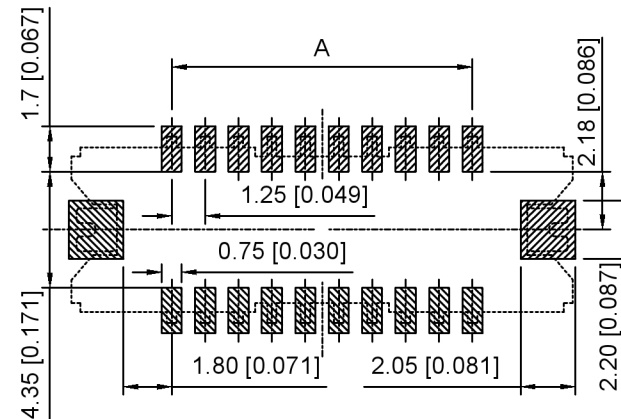

Poles	Dimensions(mm)		
	A	B	C
2x05	5.00	12.50	6.10
2x10	11.25	18.75	12.35
2x15	17.50	25.00	18.60
2x20	23.75	31.25	24.85
2x25	30.00	37.50	31.10

X9812WVS-2xXX-9TV01	PA9T	Brass	X9812H
PART NO	Material	Material(Pin)	Suitable XKB Housing


DSND		SCALE: N/A	MODEL TYPE: 1.25mm Crimp Style Connector	
DWN		VIEW: 	PART NO.: X9812WVS-2xXX-9TV01	
CHKD		UNIT: mm/in	DWG NO.: X-X9812WVS-2xXX-9TV01	
APPD		SIZE: A4		
PRECISION CO., LIMITED			WEIGHT	SHEET 1/1
			REVISION A0	

广东星坤科技股份有限公司

							ANGULAR	±5°
Δ _生		日期					L ≤ 4	±0.2
Δ _X							4 < L ≤ 16	±0.3
Δ _数		期					16 < L ≤ 63	±0.4
MARK		DESCRIPTION	DATE	REVISED	APPROVED		L > 63	±0.5
文件工程章							UNSPECIFIED TOLERANCES	
www.helloxb.com www.helloxb.cn www.xk-dg.cn								

XKLE

XKB INDUSTRIAL PRECISION CO.,LIMITED

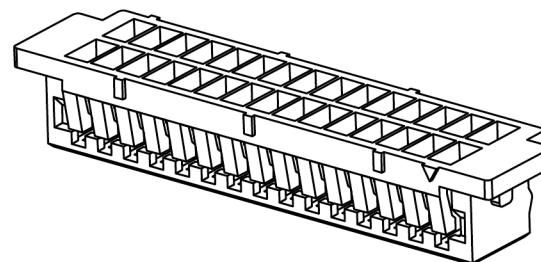

Specifications:

规格:

Voltage rating:150V AC/DC

额定电压: 150V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:500V AC/minute

耐受电压: 500V AC/分钟

Temperature range:-40°C-+85°C


温度范围: -40°C ~ $+85^{\circ}\text{C}$

Insulation resistance:500MΩ min

绝缘电阻: 500MΩ Min

Contact resistance:30mΩ Max

接触电阻: 30mΩ Max



X9812 H - 2xXX - N0

①

(2)

(


④

1.Series No

2. Category: H-HSG

3.Row No.Pin No:2xXX-2x02~2x25P

4. Material: N0-PA66 UL94V-0

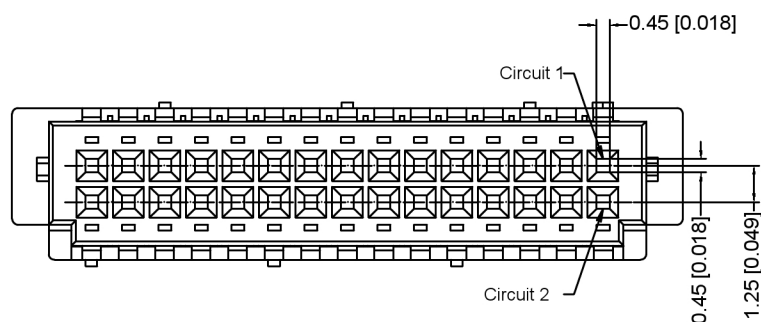

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
2*02	1.25	6.70	4.20	2*13	15.00	20.45	17.95
2*03	2.50	7.95	5.45	2*14	16.25	21.70	19.20
2*04	3.75	9.20	6.70	2*15	17.50	22.95	20.45
2*05	5.00	10.45	7.95	2*16	18.75	24.20	21.70
2*06	6.25	11.70	9.20	2*17	20.00	25.45	22.95
2*07	7.50	12.95	10.45	2*18	21.25	26.70	24.20
2*08	8.75	14.20	11.75	2*19	22.50	27.95	25.45
2*09	10.00	15.45	12.95	2*20	23.75	29.20	26.70
2*10	11.25	16.70	14.20	2*21	25.00	30.45	27.95
2*11	12.50	17.95	15.45	2*25	30.00	35.45	32.95
2*12	13.75	19.20	16.70				





X9812H-2xXX-N0	Nylon 66 UL94V-0	X9812W	X9812T
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

广东星坤科技股份有限公司		
姓名		日期
学号		
学号		
MARK		DESCRIPTION
文件工程草		www

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
ON	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	

XKLE

DSND		SCALE: N/A	MODEL TYPE: 1.25mm Crimp Style Connector		
DWN		VIEW: 	PART NO.: X9812H-2xXX-N0		
CHKD		UNIT: mm/in	DWG NO.: X-X9812H-2xXX-N0		
APPD		SIZE: A4			
PRECISION CO., LIMITED			WEIGHT	SHEET 1/1	REVISION A0

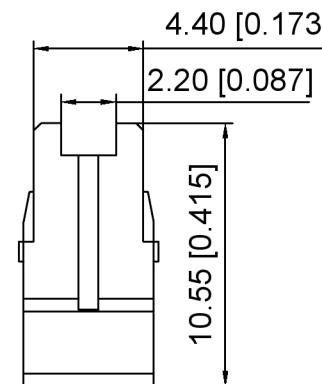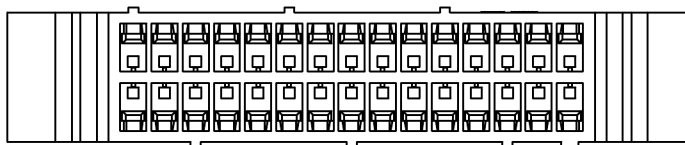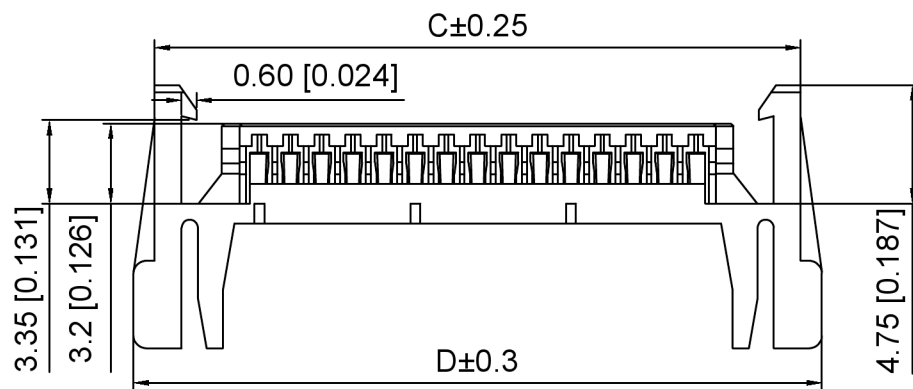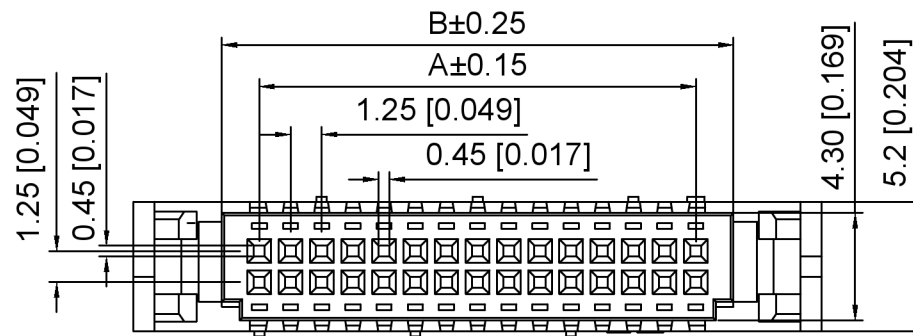

Specifications:

规格:

Voltage rating: 150V AC/DC

额定电压: 150V AC/DC

Current rating: 1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage: 500V

AC/minute

耐受电压: 500V AC/分钟

Temperature range: -25°C ~ +85°C

温度范围: -25°C ~ +85°C

Insulation resistance: 1000MΩ min

绝缘电阻: 1000MΩ Min

Contact resistance: 30mΩ Max

接触电阻: 30mΩ Max

X9812 H - 2xXX A - N0
① ② ③ ④ ⑤

1. Series No

2. Category: H-HSG

3. Row No. Pin No: 2xXX-2x05-2x20P

4. Type: A

5. Material: N0-Nylon 66 UL94V-0

Poles	DIM.(mm)			
	A	B	C	D
2x05	6.00	8.00	13.40	15.10
2x06	6.25	9.25	14.65	16.35
2x07	7.50	10.50	15.90	17.30
2x10	11.25	14.25	19.65	21.30
2x15	17.50	20.50	25.90	27.60
2x20	23.75	26.75	32.15	33.85

X9812H-2xXXA-N0	Nylon 66	X9812W	X9812T
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	1.25mm Crimp Style Connector
CHKD	UNIT: mm/in	PART NO.: X9812H-2xXXA-N0
APPD	SIZE: A4	DWG NO.: X-X9812H-2xXXA-N0
		WEIGHT
		SHEET
		REVISION
		1/1
		A0

XKB



XKB INDUSTRIAL PRECISION CO., LIMITED

广东星坤科技股份有限公司


文件工程章

文件工程章



REVISIONS	UNSPECIFIED TOLERANCES
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn	

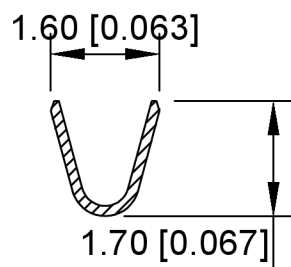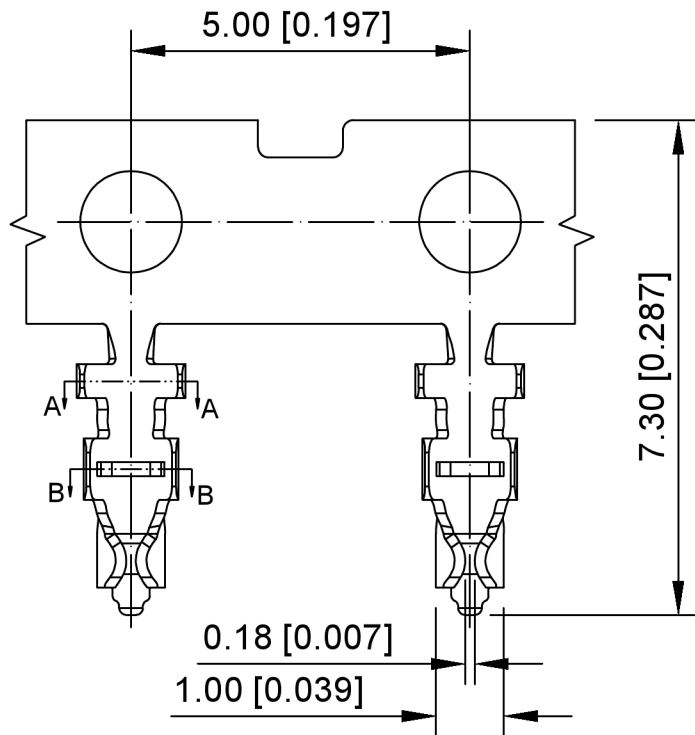

SECTION: A-A
SCALE: 1:1



SECTION: B-B
SCALE: 1:1

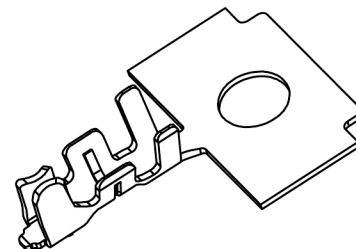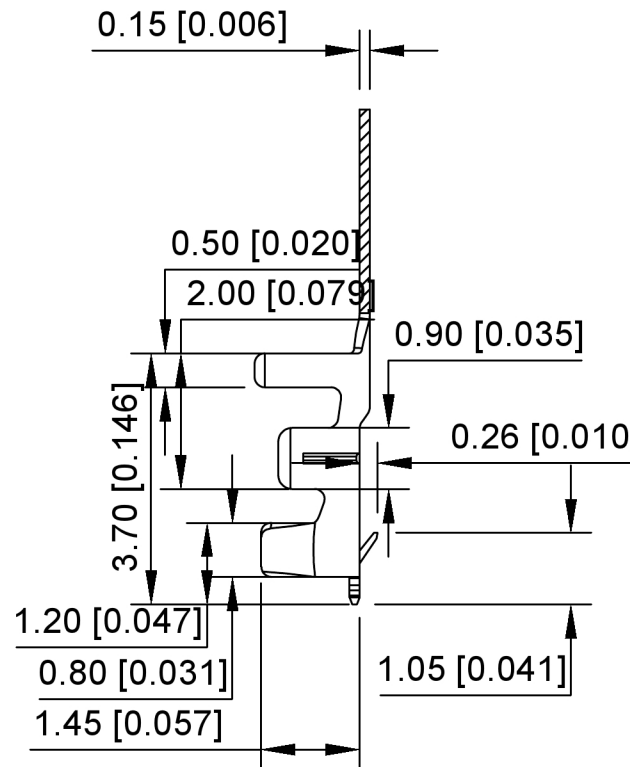

Specifications:

规格:

Voltage rating: 150V AC/DC

额定电压: 150V AC/DC

Current rating: 1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage: 500V AC/minute

耐受电压: 500V AC/分钟

Temperature range: -40°C~+85°C

温度范围: -40°C~+85°C

Insulation resistance: 500MΩ min

绝缘电阻: 500MΩ Min

Contact resistance: 30mΩ Max

接触电阻: 30mΩ Max

X9812 T - P SN - L
① ② ③ ④ ⑤

1. Series No

2. Category: T-Terminal

3. Material: P-Phosphor Bronze

4. Plating: SN-Tin Plated

5. Type: L

X9812T-PSN-L	Phosphor Bronze	AWG#26~30 O.D1.0mm	X9812H
PART NO	Material	Wire Range	Suitable XKB Housing

广东星坤科技股份有限公司			
Δ姓	Δ数	Δ日期	Δ日期
文件	工程	章	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δ姓					ANGULAR ±5°
Δ数					L ≤ 4 ±0.2
Δ日期					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

XKLB

XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE: 1.25mm Crimp Style Connector
DWN	VIEW: ④	PART NO.: X9812T-PSN-L
CHKD	UNIT: mm/in	DWG NO.: X-X9812T-PSN-L
APPD	SIZE: A4	WEIGHT
		SHEET
		REVISION
		1/1
		A0