

# SPECIFICATION FOR APPROVAL

REV
REV. 02
IIS SPECIFICATION BACK
FOR PRODUCTION PRE-

DELTA ELECTRONICS, INC. TAOYUAN PLANT 252, SHANG YING ROAD, KUEI SAN INDUSTRIAL ZONE TAOYUAN SHIEN, TAIWAN, R.O.C. TEL:886-(0)3-3591968 FAX:886-(0)3-3591991

DELTA ELECTRONICS, INC.

252, SHANG YING ROAD, KUEI SAN TAOYUAN HSIEN 333, TAIWAN, R. O. C.

# SPECIFICATION FOR APPROVAL

TEL: 886-(0)3-3591968 FAX: 886-(0)3-3591991

Customer:		
Description: DC FAN		
Customer P/N:	REV:	
Delta Model NO.: AFC0612DE-AF00	Delta Safety Model No: AFC0612DE	
Sample Rev: 02	Issue NO:	
Sample Issue Date:	Quantity:	

#### 1. SCOPE:

THIS SPECIFICATION DEFINES THE ELECTRICAL AND MECHANICAL CHARACTERISTICS OF THE DC BRUSHLESS AXIAL FLOW FAN. THE FAN MOTOR IS WITH SINGLE PHASES AND FOUR POLES.

### 2. CHARACTERS:


ITEM	DESCRIPTION	
RATED VOLTAGE	12 VDC	
OPERATION VOLTAGE	8.0 - 13.2 VDC	
INPUT CURRENT	1.50 (MAX. 1.80) A SAFETY CURRENT ON LABEL : 1.80A	
INPUT POWER	18.0 (MAX. 21.60) W	
SPEED	12000 R.P.M. (REF.)	
MAX. AIR FLOW (AT ZERO STATIC PRESSURE)	1.890 (MIN. 1.701 ) M <sup>3</sup> /MIN. 66.75 (MIN. 60.08 ) CFM	
MAX. AIR PRESSURE (AT ZERO AIRFLOW)	$44.17$ (MIN. $35.78$ ) mmH $_2$ 0 1.739 (MIN. 1.409 ) inchH $_2$ 0	
ACOUSTICAL NOISE (AVG.)	61.5 (MAX. 65.5) dB-A	
INSULATION TYPE	UL: CLASS A	

(continued)

PART NO: AFC0612DE-AF00 DELTA MODEL:

	<u> </u>
INSULATION STRENGTH	10 MEG OHM MIN. AT 500 VDC (BETWEEN FRAME AND (+) TERMINAL)
DIELECTRIC STRENGTH	5 mA MAX. AT 500 VAC 50/60 Hz ONE MINUTE, (BETWEEN FRAME AND (+) TERMINAL)
EXTERNAL COVER	OPEN TYPE
LIFE EXPECTANCE (L10) AT LABEL VOLTAGE	70,000 HOURS CONTINUOUS OPERATION AT 40 °C WITH 15 ~ 65 %RH.
ROTATION	CLOCKWISE VIEW FROM NAME PLATE SIDE
OVER CURRENT SHUT DOWN	THE CURRENT WILL SHUT DOWN WHEN LOCKING ROTOR.
LEAD WIRE	UL 1061 -F- AWG #26  BLACK WIRE NEGATIVE(-)  RED WIRE POSITIVE(+)  BLUE WIRE FREQUENCY(-F00)  YELLOW WIRE SPEED CONTROL(-PWM)
	i

- NOTES: 1. ALL READINGS ARE MEASURED AFTER STABLY WARMING UP THROUGH 10 MINUTES.
  - 2. STANDARD AIR PROPERTY IS AIR AT (Td) 25°C TEMPERATURE, (RH) 65% RELATIVE HUMIDITY, AND (Pb) 760 mmHg BAROMETRIC PRESSURE.
  - 3. THE VALUES WRITTEN IN PARENS, ( ), ARE LIMITED SPEC.
  - 4. ACOUSTICAL NOISE MEASURING CONDITION:

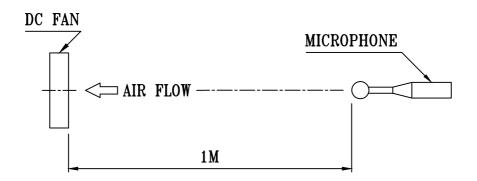

NOISE IS MEASURED AT RATED VOLTAGE IN FREE AIR IN ANECHOIC CHAMBER WITH B & K SOUND LEVEL METER WITH MICROPHONE AT A DISTANCE OF ONE METER FROM THE FAN INTAKE.

A00

3-2. FRAME ----- PLASTIC UL: 94V-0

3-3. IMPELLER ------ PLASTIC UL: 94V-0

3-4. BEARING SYSTEM ----- TWO BALL BEARINGS

3-5. WEIGHT ----- 117 GRAMS

## 4. ENVIRONMENTAL:

4-3. OPERATING HUMIDITY ------ 5 TO 90 % RH

4-4. STORAGE HUMIDITY ----- 5 TO 95 % RH

#### 5. PROTECTION:

## 5-1. LOCKED ROTOR PROTECTION

IMPEDANCE OF MOTOR WINDING PROTECTS MOTOR FROM FIRE IN 96 HOURS OF LOCKED ROTOR CONDITION AT THE RATED VOLTAGE.

#### 5-2. POLARITY PROTECTION

BE CAPABLE OF WITHSTANDING IF REVERSE CONNECTION FOR POSITIVE AND NEGATIVE LEADS.

## 6. RE OZONE DEPLETING SUBSTANCES:

6-1. NO CONTAINING PBBs, PBB0s, CFCs, PBBEs, PBDPEs AND HCFCs.

#### 7. PRODUCTION LOCATION


7-1. PRODUCTS WILL BE PRODUCED IN CHINA OR THAILAND.

\_\_\_\_\_

PART NO:

DELTA MODEL: AFC0612DE-AF00

# 8. P & Q CURVE:

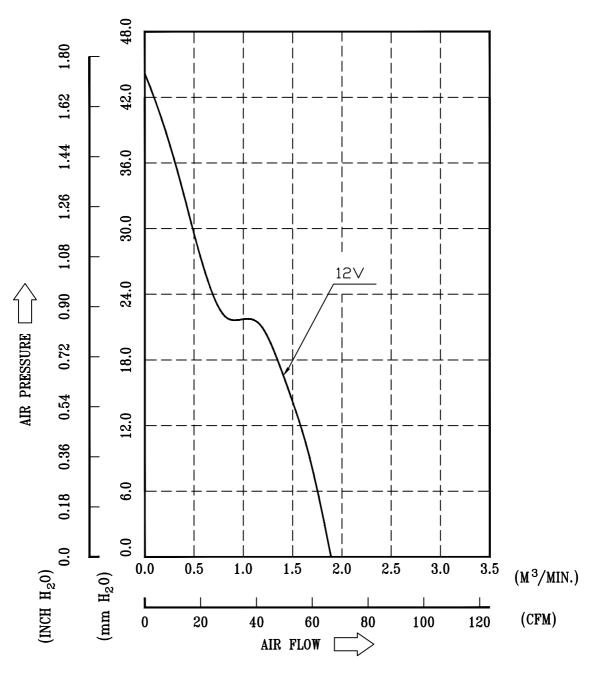

\* TEST CONDITION: INPUT VOLTAGE ----- OPERATION VOLTAGE TEMPERATURE ----- ROOM TEMPERATURE HUMIDITY ------ 65%RH


DADT NO.


PART NO:

DELTA MODEL: AFC0612DE-AF00

### 9. DIMENSION DRAWING:

### LABEL:

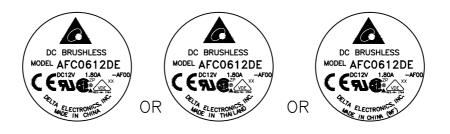

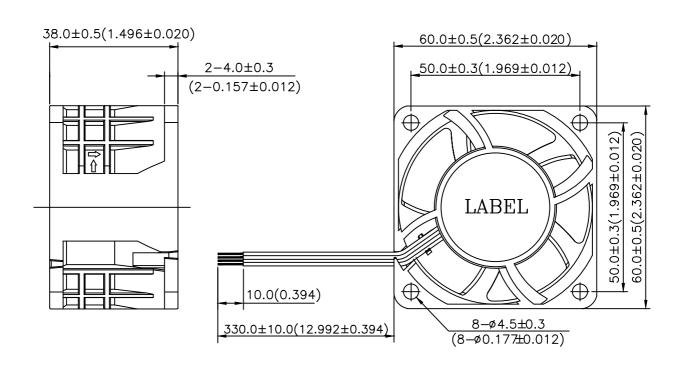

UL 1061 -F- AWG #26
BLACK WIRE NEGATIVE(-)
RED WIRE POSITIVE(+)
BLUE WIRE FREQUENCY(-F00)
YELLOW WIRE SPEED CONTROL(-PWM)


UNIT: mm (INCH)

\_\_\_\_\_

PART NO:

DELTA MODEL: AFC0612DE-AF00

10. FREQUENCY GENERATOR (FG) SIGNAL:

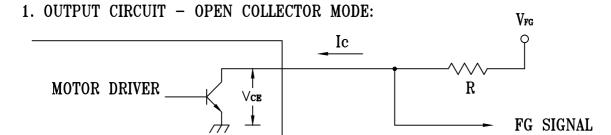

**CAUTION:** 

THE LEAD WIRE OF FG SIGNAL CAN NOT TOUCH THE LEAD WIRE OF POSITIVE OR NEGATIVE.

2. SPECIFICATION:


 $V_{CE}$  (sat)=0.5V MAX.


 $V_{FG} = 13.2 \text{VDC MAX}.$ 


 $I_c = 5mA MAX.$ 

R≥V<sub>FG</sub>/I<sub>C</sub>

3. FREQUENCY GENERATOR WAVEFORM:

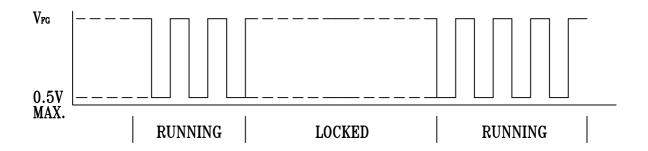



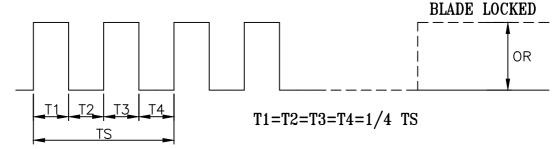

N=R.P.M

TS=60/N(SEC)

\*VOLTAGE LEVEL AFTER BLADE LOCKED

\*4 POLES


page: 6

A00

PART NO:

DELTA MODEL: AFC0612DE-AF00

#### 11. PWM CONTROL SIGNAL:

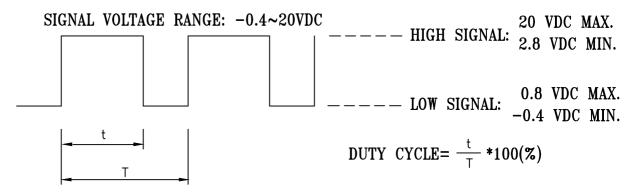


- THE FREQUENCY FOR CONTROL SINGAL OF THE FAN SHALL BE ABLE TO ACCEPT A 30HZ~300K HZ.
- THE PREFERRED OPERATING POINT FOR THE FAN IS 20K HZ.
- AT 100% DUTY CYCLE, THE ROTOR WILL SPIN AT MAXIMUM SPEED.
- AT 0% DUTY CYCLE, THE ROTOR WILL SPIN AT MINIMUM SPEED.
- WITH CONTROL SIGNAL LEAD DISCONNECTED, THE FAN WILL SPIN AT MAXIMUM SPEED.
- AT 20K HZ 25% DUTY CYCLE ,THE FAN WILL BE ABLE TO STAR FROM A DEAD STOP .

# 12. SPEED VS PWM CONTROL SIGNAL: (AT RATED VOLTAGE & PWM FREQUENCY=20KHZ

DUTY CYCLE (%)	SPEED R.P.M. (REF.)	CURRENT (A) REF.
100	12000	1.50
50	6000	0.35
0	0	0.01

# 13. PWM CONTROL LEAD WIRE INPUT IMPEDANCE:



13-1. THE FAN SPEED WILL DEFAULT TO MAXIMUM WHEN THE SPEED CONTROLL INPUT IS LEFT UNCONNECTED.

A00



# **Application Notice**

- 1. Delta will not guarantee the performance of the products if the application condition falls outside the parameters set forth in the specification.
- 2. A written request should be submitted to Delta prior to approval if deviation from this specification is required.
- 3. Please exercise caution when handling fans. Damage may be caused when pressure is applied to the impeller, if the fans are handled by the lead wires, or if the fan was hard-dropped to the production floor.
- 4. Except as pertains to some special designs, there is no guarantee that the products will be free from any such safety problems or failures as caused by the introduction of powder, droplets of water or encroachment of insect into the hub.
- 5. The above-mentioned conditions are representative of some unique examples and viewed as the first point of reference prior to all other information.
- 6. It is very important to establish the correct polarity before connecting the fan to the power source. Positive (+) and Negative (-). Damage may be caused to the fans if connection is with reverse polarity, if there is no foolproof method to protect against such error specifically mentioned in this spec.
- 7. Delta fans without special protection are not suitable where any corrosive fluids are introduced to their environment.
- 8. Please ensure all fans are stored according to the storage temperature limits specified. Do not store fans in a high humidity environment. We highly recommend performance testing is conducted before shipping, if the fans have been stored over 6 months.
- 9. Not all fans are provided with the Lock Rotor Protection feature. If you impair the rotation of the impeller for the fans that do not have this function, the performance of those fans will lead to failure.
- 10. Please be cautious when mounting the fan. Incorrect mounting of fans may cause excess resonance, vibration and subsequent noise.
- 11. It is important to consider safety when testing the fans. A suitable fan guard should be fitted to the fan to guard against any potential for personal injury.
- 12. Except where specifically stated, all tests are carried out at room (ambient) temperature and relative humidity conditions of 25°C, 65% RH. The test value is only for fan performance itself.
- 13. Be certain to connect an " $4.7\mu F$  or greater" capacitor to the fan externally when the application calls for using multiple fans in parallel, to avoid any unstable power.

Doc. No: FMBG-ES Form 001 Rev. 0001 Date: June 24, 2009