


<b>V<sub>DS</sub></b>	<b>30</b>	<b>V</b>
<b>R<sub>DS(on)</sub> max (@V<sub>GS</sub> = 10V)</b>	<b>2.5</b>	<b>mΩ</b>
<b>V<sub>SD</sub> max (@I<sub>S</sub> = 5.0A)</b>	<b>0.65</b>	<b>V</b>
<b>t<sub>rr</sub> (typical)</b>	<b>19</b>	<b>ns</b>
<b>I<sub>D</sub> (@T<sub>c(Bottom)</sub> = 25°C)</b>	<b>100 ⑥</b>	<b>A</b>

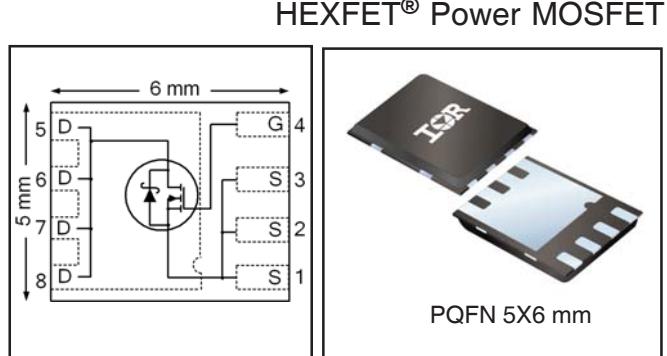

## Applications

- Synchronous MOSFET for high frequency buck converters

## Features and Benefits

### Features

Low RDSON (<2.5mΩ)
Schottky Intrinsic Diode with Low Forward Voltage
Low Thermal Resistance to PCB (<1.2°C/W)
100% R <sub>G</sub> tested
Low Profile (<0.9 mm)
Industry-Standard Pinout
Compatible with Existing Surface Mount Techniques
RoHS Compliant Containing no Lead, no Bromide and no Halogen
MSL1, Industrial Qualification

### Benefits

Lower Conduction Losses
Lower Switching Losses
Increased Power Density
Increased Reliability
Increased Power Density
Multi-Vendor Compatibility
Easier Manufacturing
Environmentally Friendlier
Increased Reliability

results in



Orderable part number	Package Type	Standard Pack		Note
		Form	Quantity	
IRFH5302DTRPBF	PQFN 5mm x 6mm	Tape and Reel	4000	
IRFH5302DTR2PBF	PQFN 5mm x 6mm	Tape and Reel	400	EOL Notice #259

## Absolute Maximum Ratings

	Parameter	Max.	Units
V <sub>DS</sub>	Drain-to-Source Voltage	30	V
V <sub>GS</sub>	Gate-to-Source Voltage	± 20	
I <sub>D</sub> @ T <sub>A</sub> = 25°C	Continuous Drain Current, V <sub>GS</sub> @ 10V	29	A
I <sub>D</sub> @ T <sub>A</sub> = 70°C	Continuous Drain Current, V <sub>GS</sub> @ 10V	23	
I <sub>D</sub> @ T <sub>C(Bottom)</sub> = 25°C	Continuous Drain Current, V <sub>GS</sub> @ 10V ⑥	100	
I <sub>D</sub> @ T <sub>C(Bottom)</sub> = 100°C	Continuous Drain Current, V <sub>GS</sub> @ 10V ⑥	100	
I <sub>DM</sub>	Pulsed Drain Current ①	400	W
P <sub>D</sub> @ T <sub>A</sub> = 25°C	Power Dissipation ⑤	3.6	
P <sub>D</sub> @ T <sub>C(Bottom)</sub> = 25°C	Power Dissipation ⑤	104	W/°C
	Linear Derating Factor ⑤	0.83	
T <sub>J</sub>	Operating Junction and Storage Temperature Range	-55 to + 150	°C
T <sub>STG</sub>			

Notes ① through ⑥ are on page 9

**Static @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

	Parameter	Min.	Typ.	Max.	Units	Conditions
$BV_{DSS}$	Drain-to-Source Breakdown Voltage	30	—	—	V	$V_{GS} = 0\text{V}$ , $I_D = 500\mu\text{A}$
$\Delta BV_{DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	-0.25	—	$\text{V}/^\circ\text{C}$	Reference to $25^\circ\text{C}$ , $I_D = 1.0\text{mA}$
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	—	2.0	2.5	$\text{m}\Omega$	$V_{GS} = 10\text{V}$ , $I_D = 50\text{A}$ ③
		—	3.1	3.7		$V_{GS} = 4.5\text{V}$ , $I_D = 50\text{A}$ ③
$V_{GS(th)}$	Gate Threshold Voltage	1.35	1.80	2.35	V	$V_{DS} = V_{GS}$ , $I_D = 100\mu\text{A}$
$\Delta V_{GS(th)}$	Gate Threshold Voltage Coefficient	—	-10	—	$\text{mV}/^\circ\text{C}$	
$I_{DSS}$	Drain-to-Source Leakage Current	—	—	500	$\mu\text{A}$	$V_{DS} = 24\text{V}$ , $V_{GS} = 0\text{V}$
		—	—	5.0	mA	$V_{DS} = 24\text{V}$ , $V_{GS} = 0\text{V}$ , $T_J = 125^\circ\text{C}$
$I_{GSS}$	Gate-to-Source Forward Leakage	—	—	100	$\text{nA}$	$V_{GS} = 20\text{V}$
	Gate-to-Source Reverse Leakage	—	—	-100		$V_{GS} = -20\text{V}$
$g_{fs}$	Forward Transconductance	110	—	—	S	$V_{DS} = 15\text{V}$ , $I_D = 50\text{A}$
$Q_g$	Total Gate Charge	—	55	—	nC	$V_{GS} = 10\text{V}$ , $V_{DS} = 15\text{V}$ , $I_D = 50\text{A}$
$Q_g$	Total Gate Charge	—	26	39	nC	
$Q_{gs1}$	Pre-Vth Gate-to-Source Charge	—	6.2	—		$V_{DS} = 15\text{V}$
$Q_{gs2}$	Post-Vth Gate-to-Source Charge	—	4.0	—		$V_{GS} = 4.5\text{V}$
$Q_{gd}$	Gate-to-Drain Charge	—	7.9	—		$I_D = 50\text{A}$
$Q_{godr}$	Gate Charge Overdrive	—	7.9	—		
$Q_{sw}$	Switch Charge ( $Q_{gs2} + Q_{gd}$ )	—	11.9	—	nC	
$Q_{oss}$	Output Charge	—	19	—		$V_{DS} = 16\text{V}$ , $V_{GS} = 0\text{V}$
$R_G$	Gate Resistance	—	1.9	—		$\Omega$
$t_{d(on)}$	Turn-On Delay Time	—	16	—	ns	$V_{DD} = 15\text{V}$ , $V_{GS} = 4.5\text{V}$
$t_r$	Rise Time	—	30	—		$I_D = 50\text{A}$
$t_{d(off)}$	Turn-Off Delay Time	—	20	—		$R_G = 1.8\Omega$
$t_f$	Fall Time	—	12	—		
$C_{iss}$	Input Capacitance	—	3635	—	pF	$V_{GS} = 0\text{V}$
$C_{oss}$	Output Capacitance	—	680	—		$V_{DS} = 25\text{V}$
$C_{rss}$	Reverse Transfer Capacitance	—	260	—		$f = 1.0\text{MHz}$

**Avalanche Characteristics**







	Parameter	Typ.	Max.	Units
$E_{AS}$	Single Pulse Avalanche Energy ②	—	130	mJ
$I_{AR}$	Avalanche Current ①	—	50	A






**Diode Characteristics**







	Parameter	Min.	Typ.	Max.	Units	Conditions
$I_S$	Continuous Source Current (Body Diode)	—	—	100	A	MOSFET symbol showing the integral reverse p-n junction diode.
$I_{SM}$	Pulsed Source Current (Body Diode) ①	—	—	400		
$V_{SD}$	Diode Forward Voltage	—	—	0.65	V	$T_J = 25^\circ\text{C}$ , $I_S = 5.0\text{A}$ , $V_{GS} = 0\text{V}$ ③
$V_{SD}$	Diode Forward Voltage	—	—	1.0	V	$T_J = 25^\circ\text{C}$ , $I_S = 50\text{A}$ , $V_{GS} = 0\text{V}$ ③
$t_{rr}$	Reverse Recovery Time	—	19	29	ns	$T_J = 25^\circ\text{C}$ , $I_F = 50\text{A}$ , $V_{DD} = 15\text{V}$
$Q_{rr}$	Reverse Recovery Charge	—	28	42	nC	$dI/dt = 300\text{A}/\mu\text{s}$ ③
$t_{on}$	Forward Turn-On Time	Time is dominated by parasitic Inductance				


**Thermal Resistance**

	Parameter	Typ.	Max.	Units
$R_{\theta JC}$ (Bottom)	Junction-to-Case ④	—	1.2	°C/W
$R_{\theta JC}$ (Top)	Junction-to-Case ④	—	15	
$R_{\theta JA}$	Junction-to-Ambient ⑤	—	35	
$R_{\theta JA} (<10\text{s})$	Junction-to-Ambient ⑤	—	22	

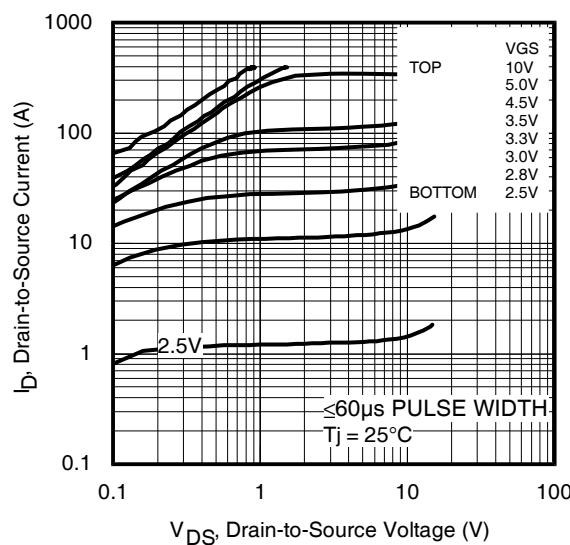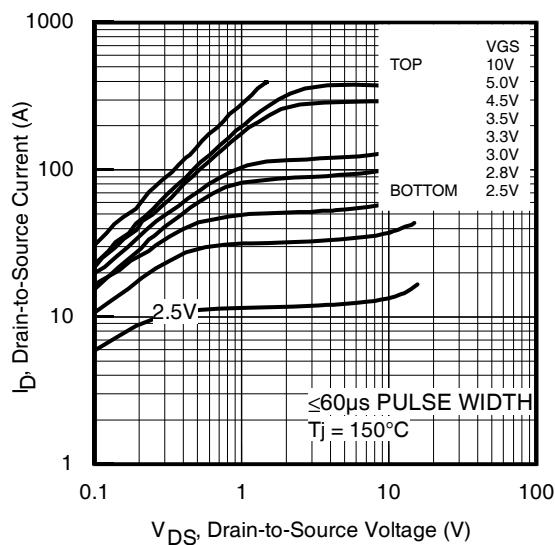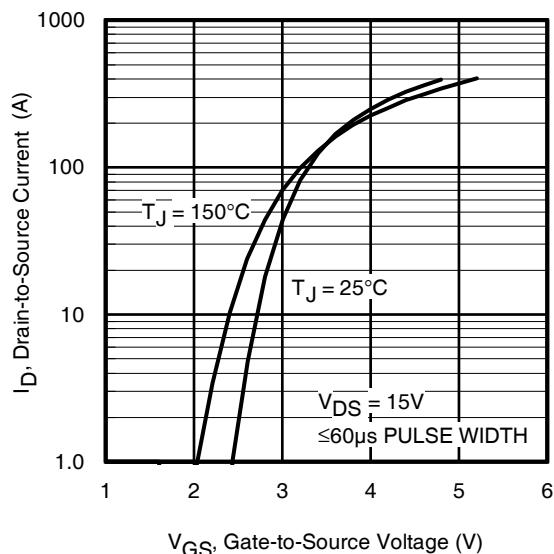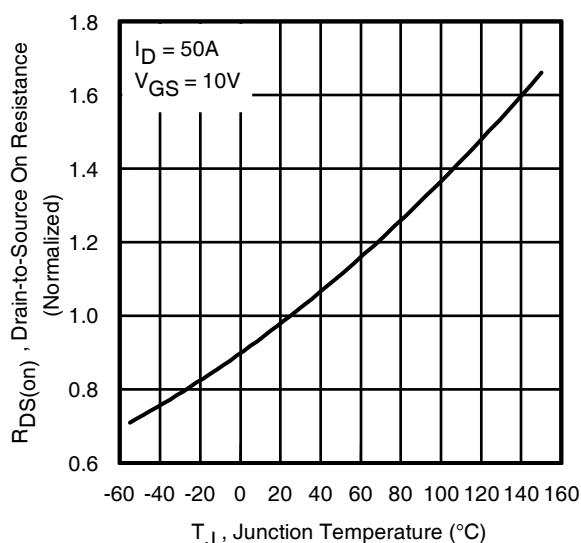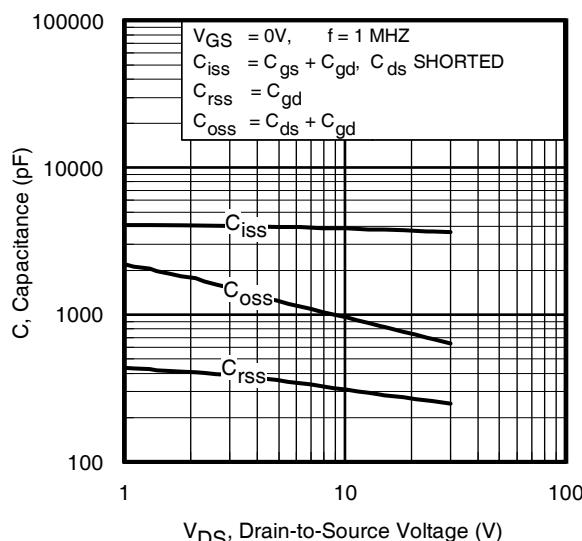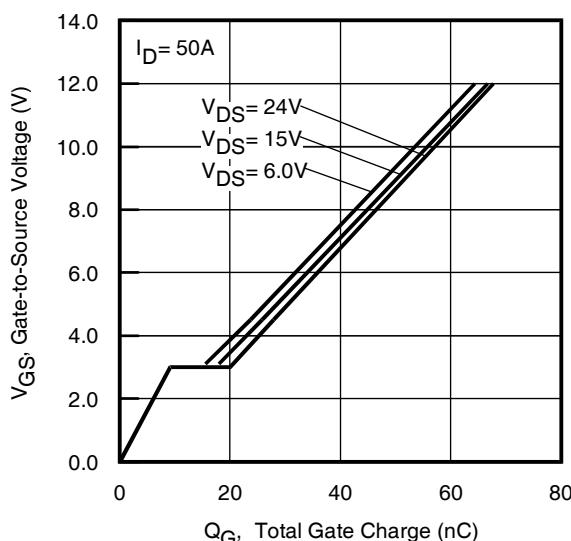
**Fig 1.** Typical Output Characteristics**Fig 2.** Typical Output Characteristics**Fig 3.** Typical Transfer Characteristics**Fig 4.** Normalized On-Resistance vs. Temperature**Fig 5.** Typical Capacitance vs. Drain-to-Source Voltage**Fig 6.** Typical Gate Charge vs. Gate-to-Source Voltage

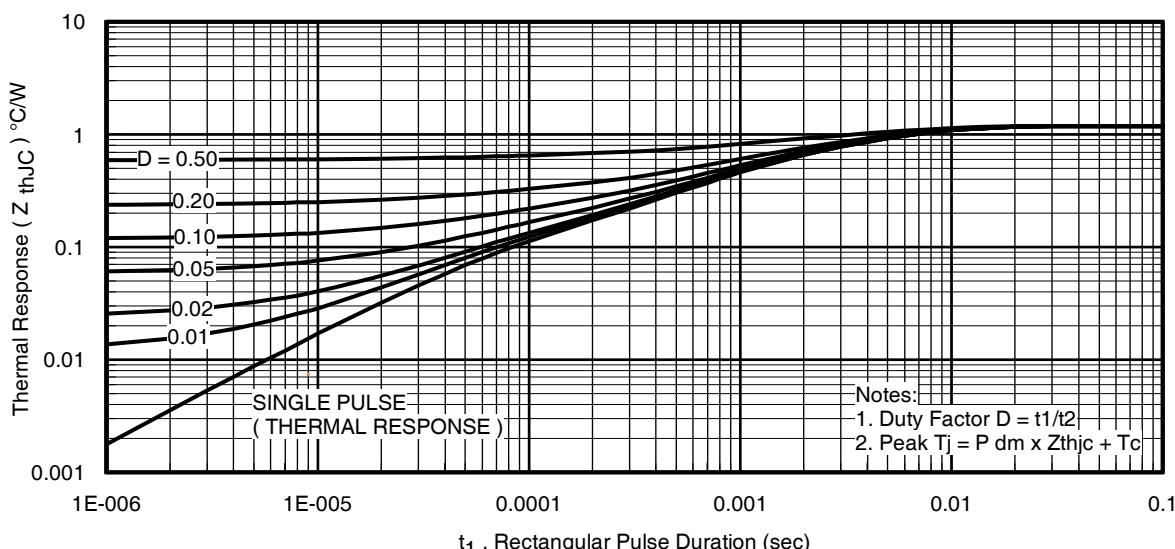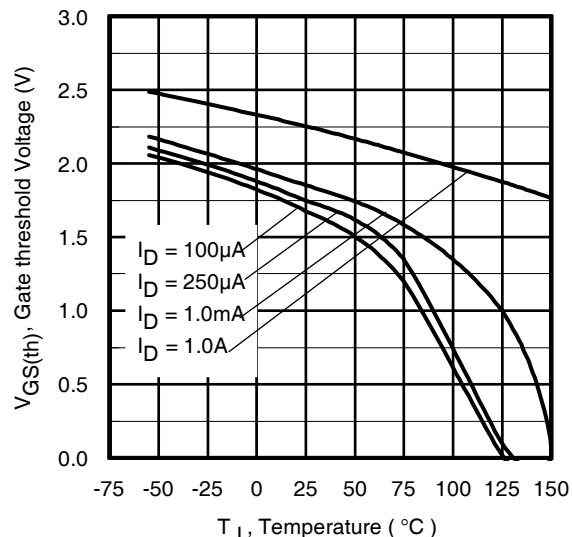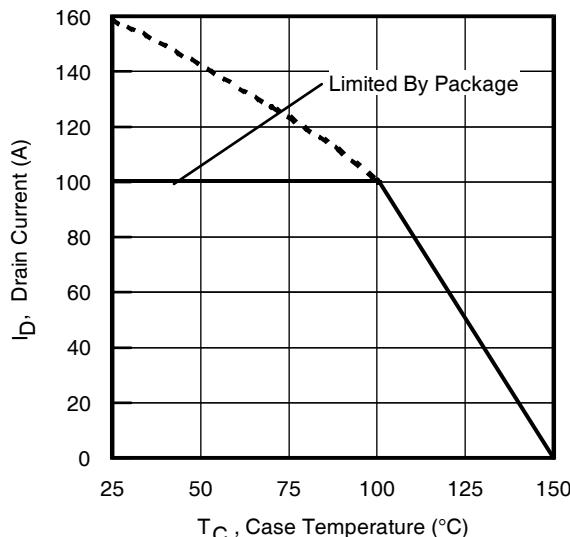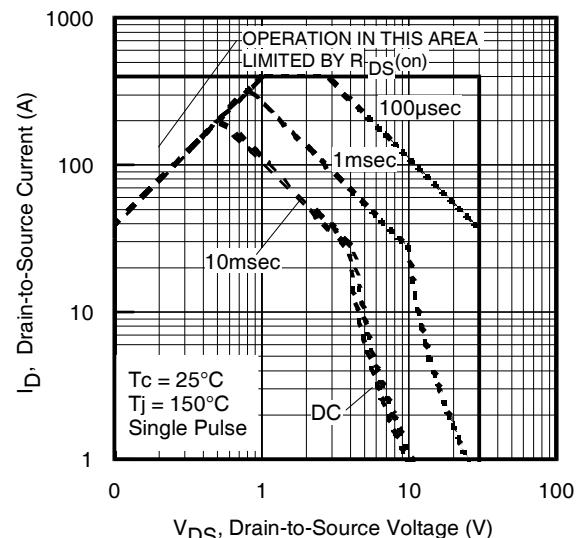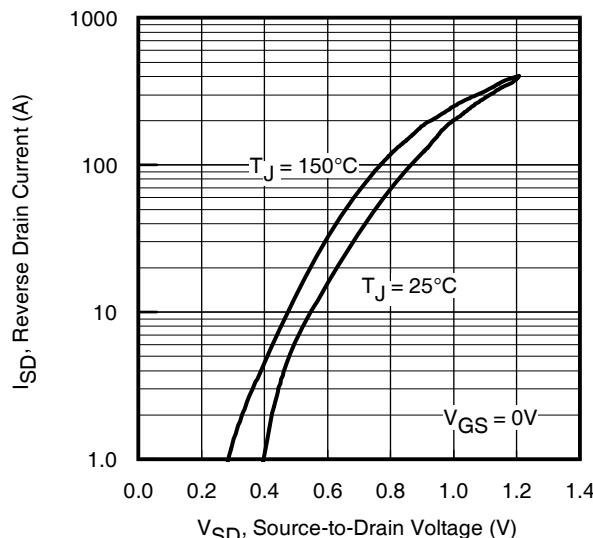

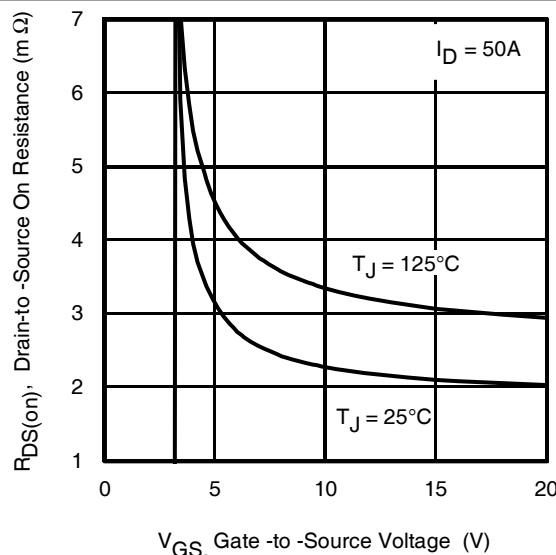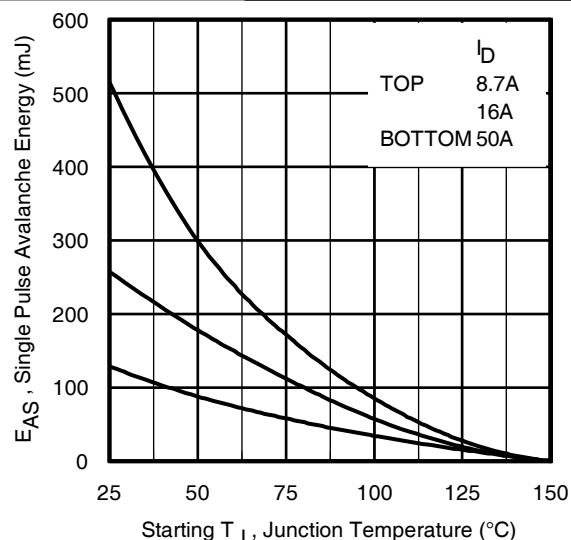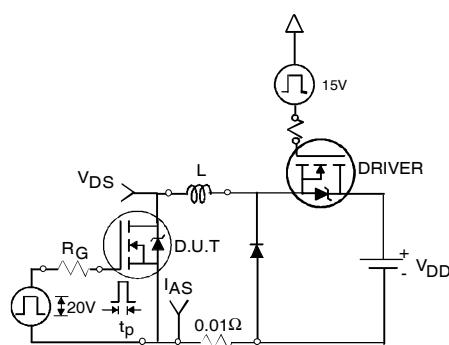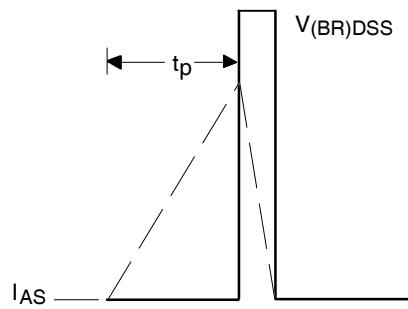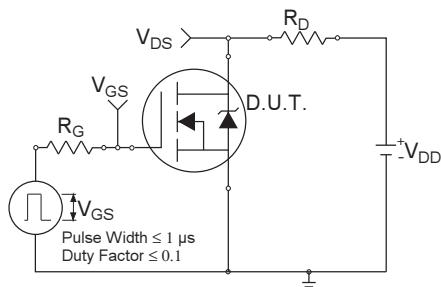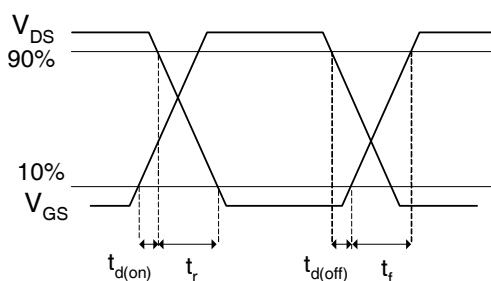
**Fig 12.** On-Resistance vs. Gate Voltage**Fig 13.** Maximum Avalanche Energy vs. Drain Current**Fig 14a.** Unclamped Inductive Test Circuit**Fig 14b.** Unclamped Inductive Waveforms**Fig 15a.** Switching Time Test Circuit**Fig 15b.** Switching Time Waveforms

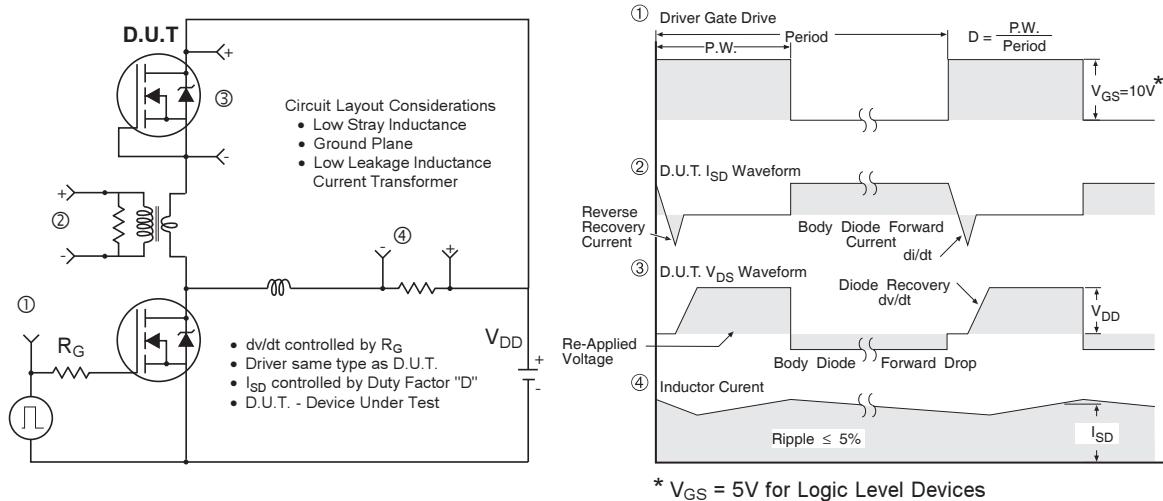

**Fig 16. Peak Diode Recovery  $dv/dt$  Test Circuit for N-Channel HEXFET® Power MOSFETs**

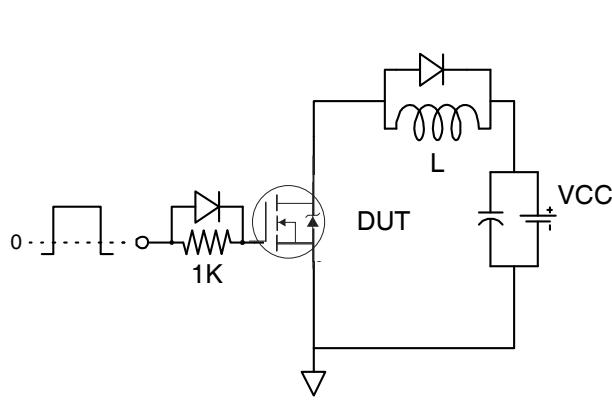


**Fig 17. Gate Charge Test Circuit**

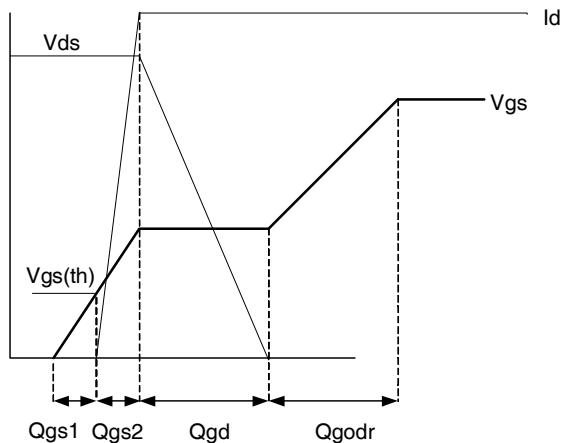

**Fig 18. Gate Charge Waveform**

## PQFN 5x6 Outline "B" Package Details

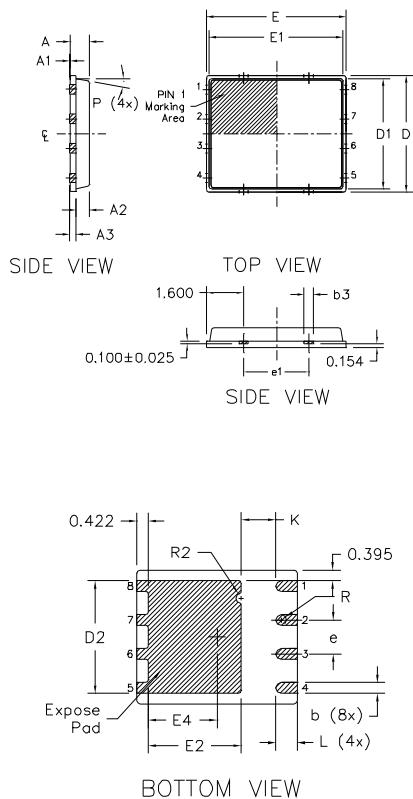

DIM SYMBOL	MILLIMITERS		INCH	
	MIN	MAX	MIN	MAX
A	0.800	0.900	0.0315	0.0543
A1	0.000	0.050	0.0000	0.0020
A3	0.200	REF	0.0079	REF
b	0.350	0.470	0.0138	0.0185
b1	0.025	0.125	0.0010	0.0049
b2	0.210	0.410	0.0083	0.0161
b3	0.150	0.450	0.0059	0.0177
D	5.000	BSC	0.1969	BSC
D1	4.750	BSC	0.1870	BSC
D2	4.100	4.300	0.1614	0.1693
E	6.000	BSC	0.2362	BSC
E1	5.750	BSC	0.2264	BSC
E2	3.380	3.780	0.1331	0.1488
e	1.270	REF	0.0500	REF
e1	2.800	REF	0.1102	REF
K	1.200	1.420	0.0472	0.0559
L	0.710	0.900	0.0280	0.0354
P	0°	12°	0°	12°
R	0.200	REF	0.0079	REF
R2	0.150	0.200	0.0059	0.0079

Note:

1. Dimensions and tolerancing confirm to ASME Y14.5M-1994

2. Dimension L represents terminal full back from package edge up to 0.1mm is acceptable

3. Coplanarity applies to the expose Heat Slug as well as the terminal


4. Radius on terminal is optional

For more information on board mounting, including footprint and stencil recommendation, please refer to application note AN-1136: <http://www.irf.com/technical-info/appnotes/an-1136.pdf>

For more information on package inspection techniques, please refer to application note AN-1154:

<http://www.irf.com/technical-info/appnotes/an-1154.pdf>


## PQFN 5x6 Part Marking

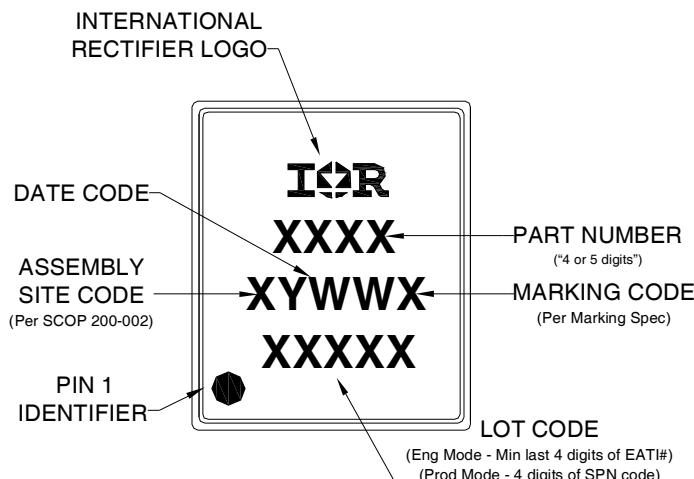


**Note:** For the most current drawing please refer to IR website at: <http://www.irf.com/package/>

## PQFN 5x6 Tape and Reel

### REEL DIMENSIONS

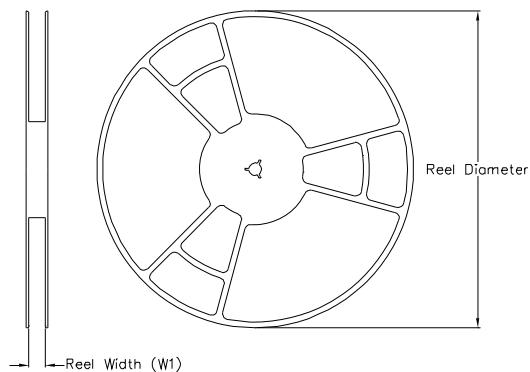


### TAPE DIMENSIONS

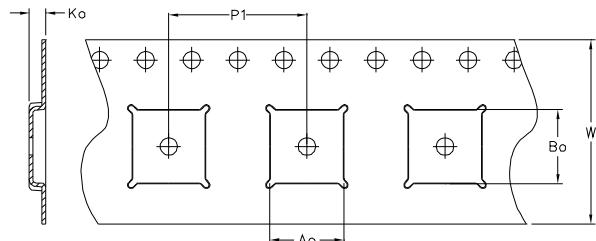

CODE	DESCRIPTION
Ao	Dimension design to accommodate the component width
Bo	Dimension design to accommodate the component length
Ko	Dimension design to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

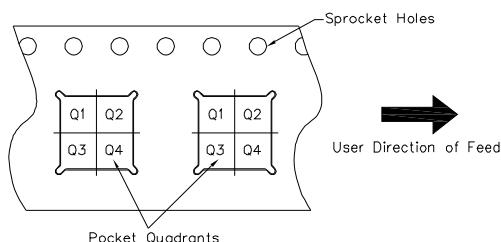

Note: All dimension are nominal

Package Type	Reel Diameter (Inch)	QTY	Reel Width W1 (mm)	Ao (mm)	Bo (mm)	Ko (mm)	P1 (mm)	W (mm)	Pin 1 Quadrant
5 X 6 PQFN	13	4000	12.4	6.300	5.300	1.20	8.00	12	Q1

Note: For the most current drawing please refer to IR website at: <http://www.irf.com/package/>

**Qualification information<sup>†</sup>**

Qualification level	Industrial <sup>††</sup> (per JEDEC JESD47F <sup>†††</sup> guidelines )	
Moisture Sensitivity Level	PQFN 5mm x 6mm	MSL1 (per JEDEC J-STD-020D <sup>†††</sup> )
RoHS compliant	Yes	

<sup>†</sup> Qualification standards can be found at International Rectifier's web site

<http://www.irf.com/product-info/reliability>

<sup>††</sup> Higher qualification ratings may be available should the user have such requirements.

Please contact your International Rectifier sales representative for further information:

<http://www.irf.com/whoto-call/salesrep/>

<sup>†††</sup> Applicable version of JEDEC standard at the time of product release.

**Notes:**

① Repetitive rating; pulse width limited by max. junction temperature.

② Starting  $T_J = 25^\circ\text{C}$ ,  $L = 0.14\text{mH}$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 50\text{A}$ .

③ Pulse width  $\leq 400\mu\text{s}$ ; duty cycle  $\leq 2\%$ .

④  $R_\theta$  is measured at  $T_J$  of approximately  $90^\circ\text{C}$ .

⑤ When mounted on 1 inch square 2 oz copper pad on 1.5x1.5 in. board of FR-4 material.

⑥ Calculated continuous current based on maximum allowable junction temperature. Package is limited to 100A by production test capability.

**Revision History**

Date	Comment
3/31/2010	• Idss limits at $T_J 25^\circ\text{C}$ is changed to $500\mu\text{A}$ max, $V_{DS} = 24\text{V}$ and at $T_J 125^\circ\text{C}$ it is changed to $5.0\text{mA}$ max, $V_{DS} = 24\text{V}$ . All other parameters remain unchanged.
1/6/2014	• Updated ordering information to reflect the End-Of-Life (EOL) of the mini-reel option (EOL notice #259). • Updated data sheet with the new IR corporate template.
3/6/2014	• Updated the part number header on pages 1 to 8.
3/17/2015	• Updated package outline and tape and reel on pages 7 and 8.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 101 N. Sepulveda Blvd., El Segundo, California 90245, USA  
To contact International Rectifier, please visit <http://www.irf.com/whoto-call/>