





DUAL-IN-LINE SOCKETS Very Low Profile Open Frame

Series 115...001

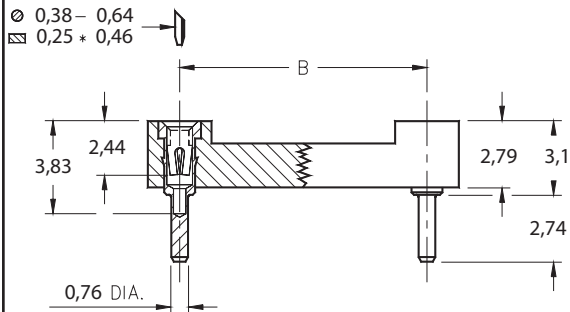

- Low profile socket, sits only 3,1mm above PCB
- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.
- Uses Mill-Max #0501 pin. See page 131 for details.

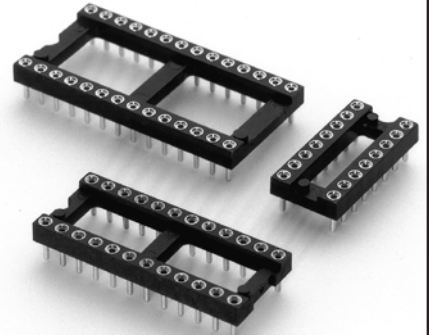

Total number of pins				Quantity per tube	Ordering Information				
	A	B	C						
10	12,6	5,08	7,6	41	XX= Plating Code See Below				115-XX-210-41-001000
4	5,0	7,62	10,1	102					115-XX-304-41-001000
6	7,6	7,62	10,1	67					115-XX-306-41-001000
8	10,1	7,62	10,1	50					115-XX-308-41-001000
10	12,6	7,62	10,1	40					115-XX-310-41-001000
14	17,7	7,62	10,1	28					115-XX-314-41-001000
16	20,3	7,62	10,1	25					115-XX-316-41-001000
18	22,8	7,62	10,1	22					115-XX-318-41-001000
20	25,3	7,62	10,1	20					115-XX-320-41-001000
22	27,8	7,62	10,1	18					115-XX-322-41-001000
24	30,4	7,62	10,1	16	For RoHS compliance, select plating code. For the all gold option (XX=13) also change part number from 115-XX-XXX-41-001000 to 115-13-XXX-41-001100				115-XX-324-41-001000
28	35,5	7,62	10,1	14					115-XX-328-41-001000
20	25,4	10,16	12,7	20					115-XX-420-41-001000
22	27,8	10,16	12,7	18					115-XX-422-41-001000
24	30,4	10,16	12,7	16					115-XX-424-41-001000
28	35,5	10,16	12,7	14					115-XX-428-41-001000
32	40,6	10,16	12,7	12					115-XX-432-41-001000
24	30,5	15,24	17,7	16					115-XX-624-41-001000
28	35,5	15,24	17,7	14					115-XX-628-41-001000
32	40,6	15,24	17,7	12					115-XX-632-41-001000
36	45,7	15,24	17,7	11	RoHS 2002/95/EC				115-XX-636-41-001000
40	50,8	15,24	17,7	10					115-XX-640-41-001000
42	53,3	15,24	17,7	9					115-XX-642-41-001000
48	60,9	15,24	17,7	8					115-XX-648-41-001000
50	63,5	15,24	17,7	8					115-XX-650-41-001000
52	66,0	15,24	17,7	7					115-XX-652-41-001000
50	63,5	22,86	25,3	8					115-XX-950-41-001000
52	66,0	22,86	25,3	7					115-XX-952-41-001000
64	81,2	22,86	25,3	6					115-XX-964-41-001000
SPECIFY PLATING CODE XX=				13					
Sleeve (Pin)				0,25µm Au		5,08µm Sn/Pb		5,08µm Sn	
Contact (Clip)				0,76µm Au		0,76µm Au		0,76µm Au	