PRESSURE GAUGES

PG-35



FEATURES

Both absolute pressure type and compound pressure type are available

Compound pressure type measures negative and positive gauge pressure.

Compact and lightweight general-purpose pressure gauges

Innovative general-purpose gauges of compact design (30mm sq.) and drip-proof structure (IP65).

Clear indication by LED

Easy-to-see LED assures clear readings on the panel and even in a dark place.


 Various modes and units can be selected according to applications

Eight different pressure units Three analog output modes Eight switch output modes

Meet EMC standards

EN 55011 (EMI) EN 61326-1 (EMS)

- Low consumption by nondisplay mode
- Set data protection by panel lock function

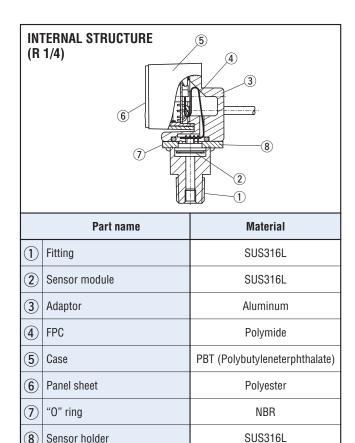

I MODEL NUMBER DESIGNATION

High corrosion resistance type PG-35-102 R-N R2

Series name Pressure range 102R: - 100 ~ 100 kPa (Compound pressure [Negative pressure ~ Positive pressure]) Fitting 102A: 0 ~ 100 kPa (Absolute pressure [Absolute vacuum ~ Barometic pressure]) R2: R 1/4 (With M5 female screw) 103R: - 100 ~ 1000 kPa (Compound pressure [Negative pressure ~ Positive pressure]) GF: G 3/8 (Flush diaphragm type) G2: G 1/4 (With M5 female screw) Pressure reference VC: : 9/16-18UNF (Gusket joint) R: Compound pressure (Negative pressure ~ Positive pressure) A: Absolute pressure (Absolute vacuum ~ Barometic pressure)

Switch output interface N: NPN open collector P: PNP open collector

Blank: Stem mount

B: Back mount

LIST OF MODEL NUMBERS

Pressure medium	Fitting	Port	Switch output interface	Pressure reference	Gai	Absolute	
riessure illeuluili				Rated pressure range	−100 ~ 100 kPa	−100 ~ 1000 kPa	0 ~ 100 kPa abs
		Stem mount		NDN	PG-35-102R-NR2	PG-35-103R-NR2	PG-35-102A-NR2
	R 1/4	Back mount	NPN		→ PG-35-102R-NR2B	→ PG-35-103R-NR2B	● PG-35-102A-NR2B
	N 1/4	Stem mount	PNP		PG-35-102R-PR2	PG-35-103R-PR2	PG-35-102A-PR2
		Back mount			→ PG-35-102R-PR2B	→ PG-35-103R-PR2B	→ PG-35-102A-PR2B
	G 3/8	Stem mount		NPN	PG-35-102R-NGF	PG-35-103R-NGF	PG-35-102A-NGF
Corrosive gases/ liquids compatible with		Stelli illoulit		PNP	PG-35-102R-PGF	PG-35-103R-PGF	PG-35-102A-PGF
SUS 316L		Stem mount	N.	NPN	PG-35-102R-NVC	PG-35-103R-NVC	PG-35-102A-NVC
	9/16-18UNF	Back mount	NPN		→ PG-35-102R-NVCB	→ PG-35-103R-NVCB	→ PG-35-102A-NVCB
		Stem mount	PNP		PG-35-102R-PVC	PG-35-103R-PVC	PG-35-102A-PVC
		Back mount			→ PG-35-102R-PVCB	→ PG-35-103R-PVCB	→ PG-35-102A-PVCB
	G 1/4	Ctom mount		NPN	PG-35-102R-NG2	PG-35-103R-NG2	PG-35-102A-NG2
	u 1/4	G 1/4 Stem mount PNP	PNP	PG-35-102R-PG2	PG-35-103R-PG2	PG-35-102A-PG2	

^{*} Verify the above model numbers when placing orders.

The products marked $\ \ \$ are manufactured upon receipt of order basis.

ENVIRONMENTAL CHARACTERISTICS

Test item	Test conditions	Permissible change
Vibration	10 ~ 500 Hz, 98.1 m/s² or 1.5 mm P-P, 3 directions for 2 hours each	
Shock	490 m/s², 3 directions for 3 times each	± 2 %F.S. maximum after test ※ 1
Pressure cycling	0 ~ Rated pressure、106 cycles	Amount of analog output fluctuation is permitted by adding conversion error of 20 mV.
Moisture resistance	40 °C, 90 ~ 95 %RH, 240 hrs.	L
EMC	EMI : EN55011: 2007, A2 : 2007 Group 1, class B EMS : EN61326-1 : 2006 Table 2	


Change in the pressure indication, switch operating points and analog output.


STANDARD SPECIFICATIONS

• Unless otherwise specified, the specs are defined at an ambient temperature of 25±5 °C and excitation voltage of 12 V DC.

	. \		PG-35			
	Item Model number	102R	103R	102A		
	Pressure reference	Gai	ige	Absolute		
	Pressure medium	Corros	ive gases/liquids compatible with SU	S 316L		
	Rated pressure range kPa	− 100 ~ 100	− 100 ~ 1000	0 ~ 100 (abs)		
	Maximum pressure kPa	200	2000	200 (abs)		
	Break-down pressure kPa	300	3000	300 (abs)		
	Operating temp. range °C		− 10 ~ 50			
ous	Compensated temp. range °C		0 ~ 50			
cati	Operating humidity %RH		35 ~ 85			
ij	Protection grade		In accordance with IEC IP65			
spe	Pressure Port		R 1/4, G 3/8, G 1/4, 9/16-18UNF			
General specifications	Type of mounting		Stem mount, Back mount			
Ger	Material of pressure port attachment		SUS 316L			
	Net weight g		Approx. 150 (Including 2 m cable)			
	Thermal error		± 3 %F.S. (0 ~ 50 °C)			
	Insulation resistance		100 M Ω minimum (DC500 V)			
	Dielectric strength	AC500 V 1 minute (Leakage current 1 mA maximum)				
	Input voltage	10.8	~ 30 V DC (Including ripple percent	age)		
	Consumption current		50 mA maximum			
	Display element		Full 3-digit LED			
ay	Rated display range kPa	- 99.9 ~ 99.9	– 100 ~ 999	0.0 ~ 99.9		
Display	Multiplier settings		Max. 11 settings			
ā	Negative pressure display	Red LEI) is ON.			
	Display accuracy		± 1 %			
	Output status		NPN/PNP			
	Output status	2-poin	t output (Transistor, Open collector o	utput)		
Ħ	Output mode	Sep	parate mode / window comparator mo	ode		
를	Switching capacity		V DC 100 mA Short-circuit protect			
<u>ਦ</u>	Residual voltage	1.2 V maximum (NF	PN), 2.2 V maximum (PNP) (At load	current of 100 mA)		
Switch output	State indication	Output 1 (Gree	n LED), Output 2 (Red LED) Lighted when	n output is ON.		
S	Switch hysteresis		0 ~ 300 counts Adjustable			
	Repeatability	± 0.2 %F.S. ± 1 count (± 0.3 %F.S. maximum)				
	Response	Ар	prox. 5, 25, 250, 2500 ms Adjustat	ole		
=	Output mode		3 modes			
Analog output	Output voltage V zero : Pin=0, V span : Pin=0 ∼ Pin (H)	1 ~ 5 V (G/V mode ZERO : 1 ± 0 R mode ZERO : 3 ± 0	0.2 V, SPAN : 2 ± 0.2 V /	R mode) ZERO : $1.36 \pm 0.2 \text{ V}$ SPAN : $3.64 \pm 0.2 \text{ V}$		
log	Impedance		10 kΩ			
Ana	Resolution	1/204 (4.9mV/0.123% F.S.)				
	Response	Ар	prox. 5, 25, 250, 2500 ms Adjustal	ole		
	Accessories	"0" ri	ngs are supplied (G 3/8 : P18, G 1/4 :	: P15)		

■ INTERNAL ELECTRICAL SCHEMATICS

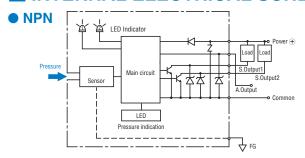

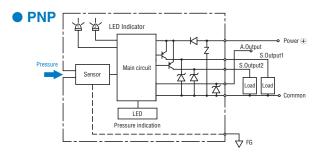

■ SELECTION OF DISPLAY MULTIPLIER

The last digit/letter represents the selection code: Blinking red LED indicates negative pressure.

Die	Display multiplier		Pressure range (− Pr ~+ Pr)			
וטופ			102R	103R	102A	
	1	×1	- 99.9 ~ 99.9	– 100 ~ 999	0.0 ~ 99.9 (abs)	
	2	× 0.0102		− 1.02 ~ 9.99		
	3	× 10.2	– 999 ~ 999		0 ~ 999 (abs)	
code	4	× 7.501	− 750 ~ 750		0 ~ 750 (abs)	
	5	× 102				
ection	6	× 0.01		− 1.00 ~ 9.99		
<u>ec</u>	7	×10	– 999 ~ 999		0 ~ 999 (abs)	
Sel	8	× 0.145	– 14.5 ~ 14.5	– 14 ~ 145	0.0 ~ 14.5 (abs)	
	9	× 0.000145				
	Α	× 0.001		− 0.10 ~ 1.00		
	b	× 0.2953	– 29.5 ~ 29.5	– 29 ~ 295	0.0 ~ 29.5 (abs)	

Diagonal column: Display multiplier cannot be selected due to resolution and number of digits. (Selection code is not indicated either.) Selection code is set at "1" prior to shipment.

ANALOG OUTPUT MODE

表示	圧力範囲 Pressure range Display	–Pr ≪	0	Pr
1	Rモード R mode	1 V ———		→ 5 V
2	Gモード G mode		1 V	→ 5 V
3	Vモード V mode	5 V <	——— 1 V	

When shipped from our factory: 102R: V mode is set at "3" and 102A, 103R: G mode is set at "2". In case of 102R and 103R, R/G/V mode can be set at "1", "2" or "3" (However, the accuracy at V mode of 103R can't be guaranteed). 102A: Only G mode can be set.

■ SWITCH OUTPUT MODE

Output	SW1				SW2			
Mode	Sepa	arate	Window c	omparator	Sepa	arate	Window c	omparator
Operation	НІ	LO	Α	В	НІ	LO	Α	В
S-1 S-2 S-3 S-4	00	00			0	0		
C-5 C-6 C-7 C-8			00	00			0	0 0
Pressure setting (Operating point)	Sett	ing 1		t): Setting 1 t): Setting 2	Setti	ing 2		s): Setting 1 s): Setting 2

Note 1. In the Separate Mode, setting 1 corresponds to SW1, and Setting 2 corresponds to SW2.

Note 2. In the Window Comparator Mode, the minimum value for SW1 and SW2 corresponds to Setting 1 and the maximum value corresponds to Setting 2.

Separate mode	Window comparator mode
(HI operation) OFF P1:SW1 P2:SW2 -Pr P1:SW1 Pr	(A operation) ON OFF P1 P2 Pr H P2 Pr
(LO operation) ON — — — — — OFF -Pr — — — — Pr	(B operation) OFF P1 P2 OFF Pr HP Pr
P1≦P2 or P1≧P2 H: Switch hysteresis、 P1=Setting 1、P2=Setting 2	P1≦P2-2H

PG-35


PRESSURE GAUGES

OUTLINE DIMENSIONS

Unless otherwise specified tolerance : \pm 0.5 (Unit: mm)

• PG-35


Configurations of joint R2 type

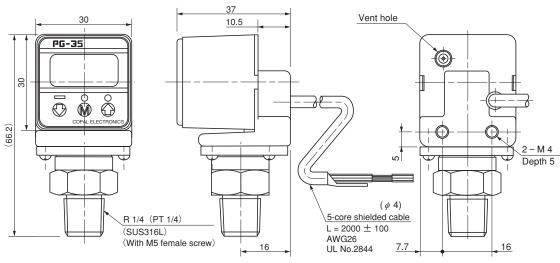

Configurations of joint VC type

Configurations of joint GF type

Configurations of joint G2 type

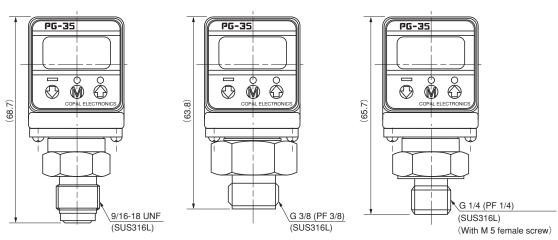


Extra care should be taken with the diaphragm part. Do not touch the diaphragm directly to avoid damaging the diaphragm.


Wire color	Connection
Brown	Power +
Gray	Analog output
Black	Switch output 1
White	Switch output 2
Blue	Common
Shield	Fitting


OUTLINE DIMENSIONS

Unless otherwise specified tolerance : \pm 0.5 (Unit: mm)


• PG-35-B (R2)




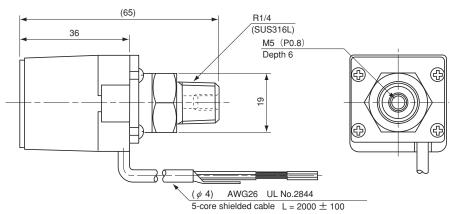




• PG-35-B (VC)



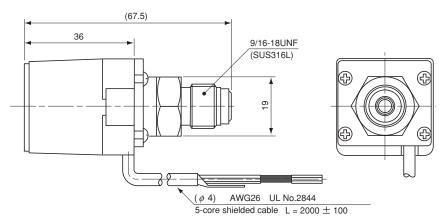




ACCESSORIES (Sold separately)

Name	Series name	Contents	Applicable model
Panel holder set	ACPG-003	Panel holder cover Panel holder Panel stopper (2pcs.)	PG-30 · PG-35 · PG-75 · PG-35H · PG-35L
Holder cover set (For protecting gauge operating panel)	ACPG-004	Panel holder cover Panel holder	PG-30 · PG-35 · PG-75 · PG-35H · PG-35L


■ HOW TO MOUNT OPTIONAL ACCESSORIES (Sold separately)

(Unit: mm)

● PG-30 • PG-35 • PG-35H • PG-35L • PG-75 Panel cut holder set & holder cover set

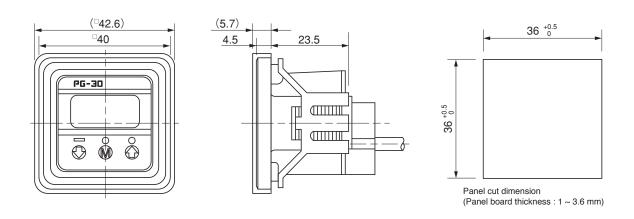


Panel holder cover set

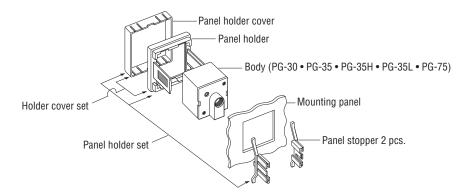

Installation

• Tube at atmospheric pressure intake

If there is any possibility that the sensor may become wet with oil or water, which may enter the case through the air intake, connect a silicon tube, or similar, to the intake and position the end of the tube in a suitably safe place. Be sure not to bend the tube or block the end of the tube.



Piping

Use a wrench (13mm) on the aluminum die-casting. Do not hold the plastic case when tightening. Apply sealing tape at the male screw area to protect against air leaks. If mounting with an angled bracket, the maximum torque of the M3 screws should be less than 0.3N·m. When using the accessories sealing or fitting screw, bind up the seal tape around the sealing screw one and a half or two turns, and screw it in the pressure port by hand without damaging the screw thread. After then, tighten the screw sufficiently with wrench.(Recommended torque:Plastic screw 3.0N-m, Metal screw 10.0N-m)

Customization

We also offer customized solutions. Please contact your local sales office for details.

Model number	Shape and other customization
PG-35-102R-NR2-011	Bracket (mounting plate) supplied
PG-35-102R-NR2-105	Default mode (X 1 <multiplier factor="">, V mode <analog output="">, separate mode <switch output="">), Pressure setting (P1:30kPa / P2 :50kPa, 10ms<hysteresis>, 0 (digital filter))</hysteresis></switch></analog></multiplier>
PG-35-102R-NR2B-128	Panel holder set (ACPG-003) separately packed and suuplied
PG-35-102R-PR2-021	Tube for vent hole supplied. Measures against coolant intrusion (application of epoxy around a cable bush, and protection cover for panel sheet)
PG-35-103R-NS2	Fitting : 1/4 Swagelok tubing