

#### Is Now Part of



# ON Semiconductor®

# To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="general-regarding-numbers-n

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



March 2015

## FDD6635

## 35V N-Channel PowerTrench® MOSFET

### **General Description**

This N-Channel MOSFET has been produced using Fairchild Semiconductor's proprietary PowerTrench technology to deliver low Rdson and optimized Bvdss capability to offer superior performance benefit in the applications.


#### **Applications**


- Inverter
- Power Supplies

### **Features**

- 59 A, 35 V  $R_{DS(ON)} = 10 \ m\Omega \ @ \ V_{GS} = 10 \ V$   $R_{DS(ON)} = 13 \ m\Omega \ @ \ V_{GS} = 4.5 \ V$
- · Fast Switching
- RoHS compliant







Absolute Maximum Ratings TA=25°C unless otherwise noted

Symbol	Parameter		Ratings	Units	
$V_{\text{DSS}}$	Drain-Source Voltage		35	V	
V <sub>DS(Avalanche)</sub>	Drain-Source Avalanche Voltage (maximum) (Note 4)			40	V
V <sub>GSS</sub>	Gate-Source Voltage			±20	V
I <sub>D</sub>	Continuous Drain Current	@T <sub>C</sub> =25°C	(Note 3)	59	Α
		@T <sub>A</sub> =25°C	(Note 1a)	15	
		Pulsed	(Note 1a)	100	
E <sub>AS</sub>	Single Pulse Avalanche Energy (		(Note 5)	113	mJ
P <sub>D</sub>	Power Dissipation	@T <sub>C</sub> =25°C	(Note 3)	55	W
		@T <sub>A</sub> =25°C	(Note 1a)	3.8	
		@T <sub>A</sub> =25°C	(Note 1b)	1.6	
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Junction Temperature Range			-55 to +150	°C

#### **Thermal Characteristics**

$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	(Note 1)	2.7	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	(Note 1a)	40	°C/W
Reia	Thermal Resistance, Junction-to-Ambient	(Note 1b)	96	°C/W

**Package Marking and Ordering Information** 

Device Marking	Device	Package	Reel Size	Tape width	Quantity
FDD6635	FDD6635	D-PAK (TO-252)	13"	16mm	2500 units

Symbol	Parameter	Test Conditions	Min	Тур	Max	Units
Off Char	acteristics(Note 2)			l .		l .
BV <sub>DSS</sub>	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, \qquad I_{D} = 250  \mu\text{A}$	35			V
$\frac{\Delta BV_{DSS}}{\Delta T_{J}}$	Breakdown Voltage Temperature Coefficient	$I_D = 250 \mu A$ , Referenced to 25°C		32		mV/°C
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	$V_{DS} = 28 \text{ V},  V_{GS} = 0 \text{ V}$			1	μА
I <sub>GSS</sub>	Gate-Body Leakage	$V_{GS} = \pm 20 \text{ V},  V_{DS} = 0 \text{ V}$			±100	nA
On Chara	acteristics (Note 2)					
V <sub>GS(th)</sub>	Gate Threshold Voltage	$V_{DS} = V_{GS}$ , $I_D = 250 \mu A$	1	1.9	3	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate Threshold Voltage Temperature Coefficient	$I_D$ = 250 $\mu$ A, Referenced to 25°C		<b>-</b> 5		mV/°(
$R_{\text{DS(on)}}$	Static Drain–Source On–Resistance	$ \begin{vmatrix} V_{GS} = 10 \text{ V}, & I_D = 15 \text{ A} \\ V_{GS} = 4.5 \text{ V}, & I_D = 13 \text{ A} \\ V_{GS} = 10 \text{ V}, & I_D = 15 \text{ A}, T_J = 125 ^{\circ}\text{C} \\ \end{vmatrix} $		8.2 10.2 12.4	10 13 16	mΩ
g <sub>FS</sub>	Forward Transconductance	$V_{DS} = 5 \text{ V}, \qquad I_{D} = 15 \text{ A}$		53		S
Dynamic	Characteristics					
C <sub>iss</sub>	Input Capacitance			1400		pF
Coss	Output Capacitance	$V_{DS} = 20 \text{ V}, \qquad V_{GS} = 0 \text{ V},$		317		pF
C <sub>rss</sub>	Reverse Transfer Capacitance	f = 1.0 MHz		137		pF
R <sub>G</sub>	Gate Resistance	V <sub>GS</sub> = 15 mV, f = 1.0 MHz		1.4		Ω
Switchin	q Characteristics (Note 2)					
t <sub>d(on)</sub>	Turn-On Delay Time			11	20	ns
t <sub>r</sub>	Turn-On Rise Time	$V_{DD} = 20 \text{ V}, \qquad I_D = 1 \text{ A},$		6	12	ns
t <sub>d(off)</sub>	Turn-Off Delay Time	$V_{GS} = 10 \text{ V}, \qquad R_{GEN} = 6 \Omega$		28	45	ns
t <sub>f</sub>	Turn-Off Fall Time	]		14	25	ns
Q <sub>g (TOT)</sub>	Total Gate Charge, V <sub>GS</sub> = 10V			26	36	nC
Qg	Total Gate Charge, V <sub>GS</sub> = 5V	$V_{DS} = 20 \text{ V}, I_{D} = 15 \text{ A}$		13	18	nC
$Q_{gs}$	Gate-Source Charge			3.9		nC
$Q_{gd}$	Gate-Drain Charge	]		5.3		nC

<b>Electrical Characteristics</b> $T_A = 25^{\circ}\text{C}$ unless otherwise noted						
Symbol	Parameter	Test Conditions	Min	Тур	Max	Units
Drain-Sc	ource Diode Characteristics					
$V_{SD}$	Drain–Source Diode Forward Voltage	$V_{GS} = 0 \text{ V},  I_{S} = 15 \text{ A}$ (Note 2)		0.8	1.2	V
trr	Diode Reverse Recovery Time	IF = 15 A, diF/dt = 100 A/μs		26		ns
Qrr	Diode Reverse Recovery Charge			16		nC

#### Notes

 R<sub>0,1A</sub> is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. R<sub>0,1C</sub> is guaranteed by design while R<sub>0,CA</sub> is determined by the user's board design.



 a) R<sub>0JA</sub> = 40°C/W when mounted on a 1in<sup>2</sup> pad of 2 oz copper



b) R<sub>θJA</sub> = 96°C/W when mounted on a minimum pad.

Scale 1:1 on letter size paper

2. Pulse Test: Pulse Width <  $300\mu s$ , Duty Cycle < 2.0%

3. Maximum current is calculated as:  $\sqrt{\frac{P_D}{R_{DS(ON)}}}$ 

where  $P_D$  is maximum power dissipation at  $T_C = 25^{\circ}C$  and  $R_{DS(on)}$  is at  $T_{J(max)}$  and  $V_{GS} = 10V$ . Package current limitation is 21A

4. BV(avalanche) Single-Pulse rating is guaranteed if device is operated within the UIS SOA boundary of the device.

5. Starting  $T_J=25\,^{\circ}C,\,L=1mH,\,I_{AS}=15A,\,V_{DD}=35V,\,V_{GS}=10V$ 

## **Typical Characteristics**




Figure 1. On-Region Characteristics




Figure 2. On-Resistance Variation with Drain Current and Gate Voltage




Figure 3. On-Resistance Variation with Temperature




Figure 4. On-Resistance Variation with Gate-to-Source Voltage




Figure 5. Transfer Characteristics




Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature

## **Typical Characteristics**




Figure 7. Gate Charge Characteristics




Figure 9. Maximum Safe Operating Area




Figure 11. Single Pulse Maximum Peak Current




Figure 8. Capacitance Characteristics




Figure 10. Single Pulse Maximum Power Dissipation




Figure 12. Unclamped Inductive Switching Capability

## **Typical Characteristics**

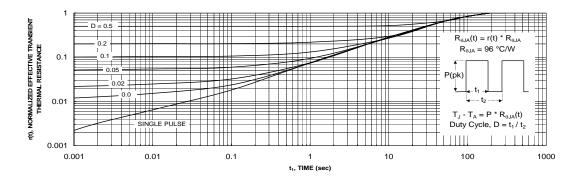



Figure 13. Transient Thermal Response Curve

Thermal characterization performed using the conditions described in Note 1b. Transient thermal response will change depending on the circuit board design.

### **Test Circuits and Waveforms**







Figure 14. Unclamped Inductive Load Test Circuit

Figure 15. Unclamped Inductive Waveforms







Figure 16. Gate Charge Test Circuit

Figure 17. Gate Charge Waveform







Figure 18. Switching Time Test Circuit

Figure 19. Switching Time Waveforms

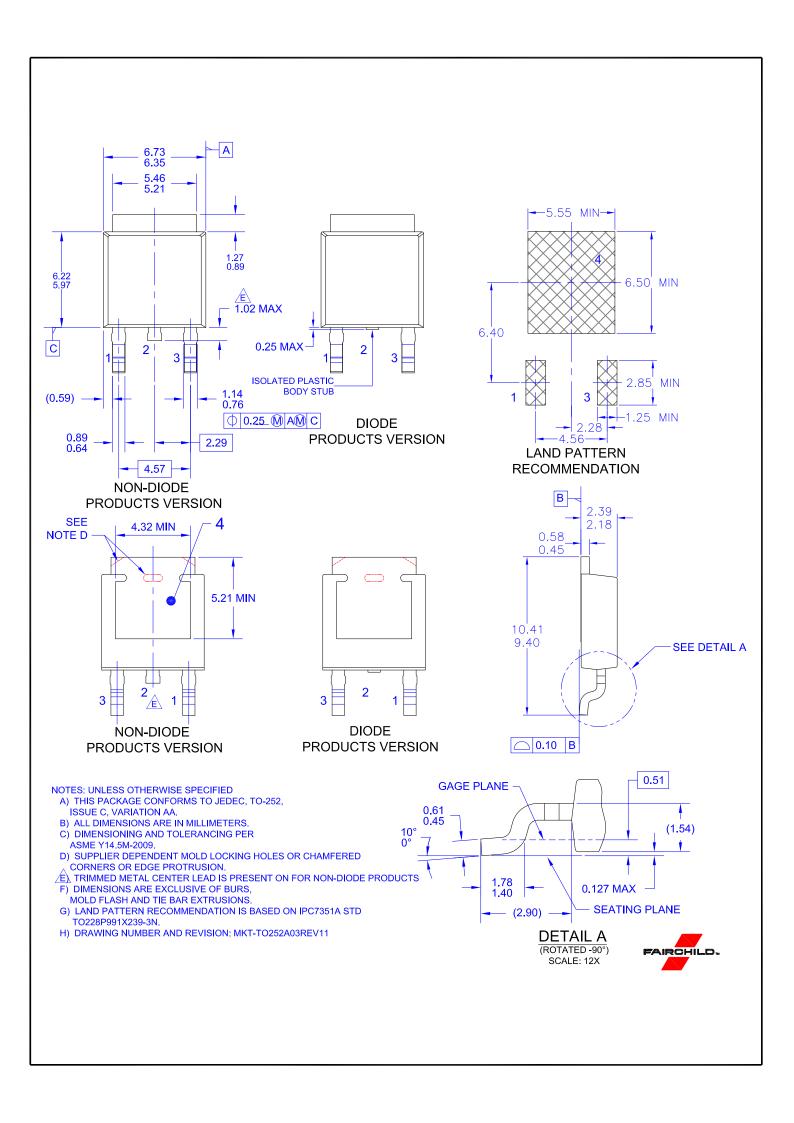

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative