

# QuickNet™ Small Diameter Trunk Cable Assemblies OFNP and LSZH

## technical information

Small Diameter Trunk Cable Assemblies allow for rapid deployment of high-density permanent links in a single assembly for data center applications requiring quick infrastructure deployment, such as main, horizontal, and zone distribution areas. These trunk cable assemblies optimize cable routing requirements to ensure efficient use of pathway space and significantly reduce installation time and cost. QuickNet™ Small Diameter Trunk Cable Assemblies are built with modular MPO connectivity and provide compatibility, flexibility and system performance in all permanent link applications. All small diameter trunk cable assemblies are factory terminated and tested to deliver verified optical performance and reliability for improved network integrity. 10Gig versions provide 10 Gb/s network performance up to 300 meters for OM3 and up to 550 meters for OM4 per IEEE 802.3ae 10 GbE standard while maintaining compatibility with legacy systems.



## application

Allows system designers to tailor configuration, reach and breakout construction to application requirements; to minimize waste, optimize cable management, speed deployment, improve flexibility and manageability for lower installation costs. Small diameter trunk cable assemblies use 30 – 40% less space which is ideal for high cable density applications.

## construction

<b>Cable type:</b>	Indoor Small Diameter Trunk		
<b>Cable jacket ratings:</b>	Plenum (OFNP) NFPA 262 Low Smoke Zero Halogen (LSZH) IEC 60332-1 and IEC 60332-3C		
<b>Fiber types:</b>	Singlemode:	OS1/OS2 9/125µm Multimode:	OM3 50/125µm OM4 50/125µm
<b>Connector types end 'A':</b>	MPO Female or MPO Male, LC Duplex (12F only)		
<b>Connector types end 'B':</b>	MPO Female or MPO Male, LC Duplex (12F only)		
<b>Fiber count:</b>	12, 24 and 48		
<b>Jacket color:</b>	OS1/OS2	Yellow	
	OM3	Aqua	
	OM4	Aqua	

## optical properties

<b>Maximum cable attenuation:</b>	Singlemode:	0.4dB/km at 1310nm 0.3dB/km at 1550nm
	Multimode:	3.0dB/km at 850nm 1.5dB/km at 1300nm
<b>Maximum connector insertion loss:</b>	Standard Singlemode MPO:	0.75dB
	Standard Multimode MPO:	0.50dB
	Optimized Multimode MPO:	0.35dB
	Standard Singlemode LC:	0.35dB
	Standard Multimode LC:	0.25dB
	Optimized Multimode LC:	0.15dB
<b>Minimum connector return loss:</b>	Singlemode:	55dB
	Multimode:	MPO 30dB LC 26dB

## physical properties

<b>Cable outside diameter (OD):</b>	12-fiber:	4.5mm
	24-fiber:	5.4mm
	48-fiber:	6.1mm
<b>Cable weight (kg/km) (lb/kft):</b>	12-fiber LSZH:	22.2kg/km (14.9 lb/kft)
	24-fiber LSZH:	29.7kg/km (19.9 lb/kft)
	12-fiber Plenum:	23.6kg/km (15.9 lb/kft)
	24-fiber Plenum:	31.7kg/km (21.3lb/kft)
<b>Minimum bend radius:</b>	Under load:	20 x Cable OD
	Static:	10 x Cable OD
<b>Cable tensile strength:</b>	440N	
<b>Cable compressive load:</b>	10 N/mm	
<b>Connector cable retention:</b>	50N	
<b>Connector durability:</b>	500 mating cycles*	
<b>Breakout outside diameter:</b>	3.0mm	
<b>Transition outside diameter:</b>	12-fiber:	10mm
	24-fiber:	10mm
	48-fiber:	12mm
<b>Pulling eye diameter:</b>	12-fiber:	19mm
	24-fiber:	23mm
	48-fiber:	29mm
<b>Breakout length:</b>	1m	

\*With proper cleaning and inspecting.

## environmental properties

<b>Operating temperature:</b>	-20°C to + 70°C (-4°F to 158°F)
<b>Storage and shipping temperature:</b>	-40°C to +70°C (-40°F to 158°F)
<b>Installation temperature:</b>	-10°C to + 60°C (14°F to 140°F)

## standards

Meets or exceeds: ISO/IEC 11801, TIA/EIA-568-C.3, TIA-604-5 (FOCIS-5), TIC/EIA-568-C.1, GR-409-CORE, ICEA S-83-596 RoHS Compliant

# QuickNet™ Small Diameter Trunk Cable Assemblies OFNP and LSZH

## part number

Example: FXUYP5E5EAAM030 = OM3, 24-fiber, indoor small diameter trunk cable, plenum, MPO female to MPO female, polarity A, pulling eye, 30 meters.

CHARACTER	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
EXAMPLE	F	X	U	Y	P	5	E	5	E	A	A	M	0	3	0

### 1 – Fiber

F = Fiber

### 2 – Fiber Type

9 = OS1/OS2 9/125µm

X = OM3 50/125µm

Z = OM4 50/125µm

### 3 – Fiber Count

T = 12 fiber

U = 24 fiber

W = 48 fiber

### 4 – Cable Type

Y = Indoor small diameter trunk cable

### 5 – Jacket Type

P = Plenum (OFNP)

L = Low Smoke Zero Halogen (LSZH)

### 6 – Connector Type (end A)

5 = MPO female connector

6 = MPO male connector

L = LC duplex (12 and 24 fiber only)

### 7 – Connector Variant

E = (MPO)

2 = 2.0mm upjacket (LC)

5 = 39" Breakout with HD Flex™ Transition

### 8 – Connector Type (end B)

5 = MPO female connector

6 = MPO male connector

L = LC Duplex (12 and 24 fiber only)

### 9 – Connector Variant

E = 1m breakout (MPO)

2 = 2.0mm upjacket (LC)

5 = 39" Breakout with HD Flex™ Transition

### 10 – Construction/Performance

A = Polarity Method A, Standard IL (MPO to MPO)

B = Polarity Method B, Standard IL (MPO to MPO)

O = Optimized Performance/Std. Polarity (MPO to LC or LC to LC)

S = Std. Performance/Std. Polarity (MPO to LC or LC to LC)

X = Polarity Method A, Optimized IL (MPO to MPO)

Y = Polarity Method B, Optimized IL (MPO to MPO)

### 11 – Other

A = Pulling eye end A

N = No pulling eye (lengths less than 20 meters/60 feet only)

### 12 – Unit of Length

M = Meters


F = Feet

### 13, 14, 15 – Cable Assembly Length

M = 005 – 100

F = 015 – 300

## small diameter trunk cable assembly detail

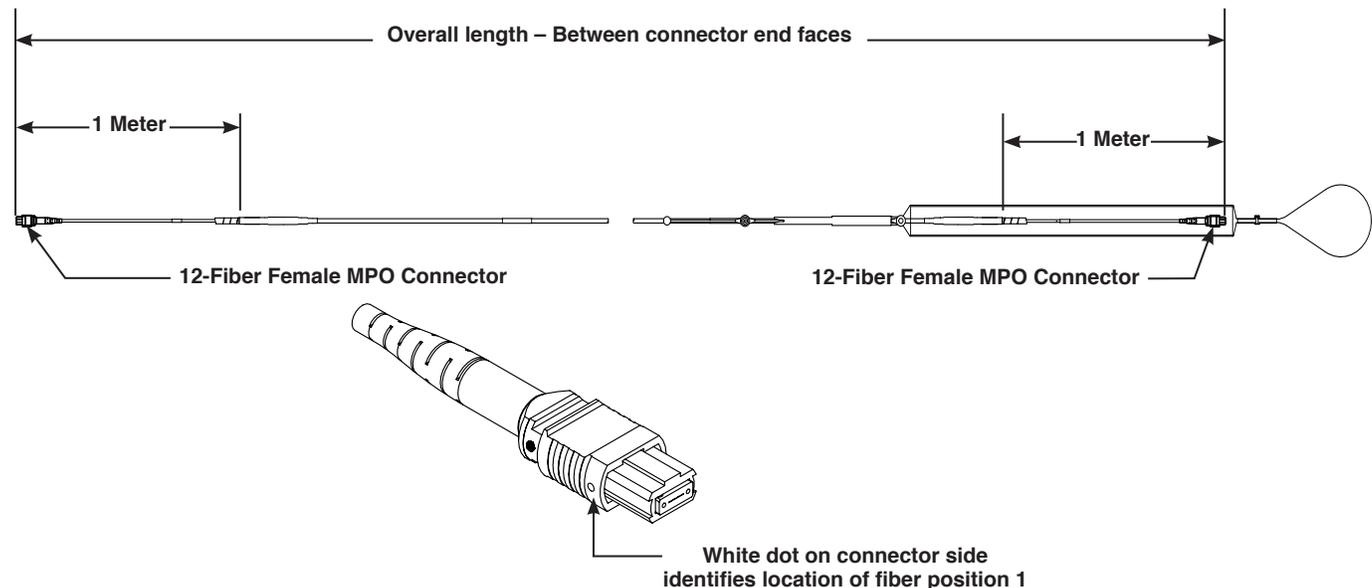

Please contact Panduit customer service for information on additional part number options.

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

**PANDUIT**®

©2017 Panduit Corp.  
ALL RIGHTS RESERVED.  
FBSP74--WW-ENG  
11/2017