

## Low voltage PNP power transistor

## **Application**

■ General purpose switching and amplifier

#### **Description**

The device is manufactured in planar technology with "Base Island" layout. The resulting transistor shows exceptional high gain performance coupled with very low saturation voltage. The NPN type is TIP29C.




Figure 1. Internal ochematic diagram




Table 1. Perice summary

O'.c at code	Marking	Package	Packaging
TIP30C	TIP30C	TO-220	Tube

roduct(s)

# 1 Absolute maximum ratings

Table 2. Absolute maximum ratings

Symbol	Parameter	Value	Unit
$V_{CBO}$	Collector-base voltage (I <sub>E</sub> = 0)	-100	V
$V_{CEO}$	Collector-emitter voltage (I <sub>B</sub> = 0)	-100	V
$V_{EBO}$	Emitte-base voltage ( $I_C = 0$ )	-5	V
I <sub>C</sub>	Collector current	-1	Α
I <sub>CM</sub>	Collector peak current (t <sub>P</sub> < 5ms)	-3	Α
I <sub>B</sub>	Base current	-0.4	Α
P <sub>TOT</sub>	Total dissipation at T <sub>case</sub> = 25°C T <sub>amb</sub> = 25°C	30 2	W W
T <sub>stg</sub>	Storage temperature	-65 to 150	°C
$T_J$	Max. operating junction temperature	150	°C
	obsole te	P	
	Storage temperature  Max. operating junction temperature		

TIP30C **Electrical characteristics** 

#### **Electrical characteristics** 2

(T<sub>case</sub> = 25°C; unless otherwise specified)

Table 3. **Electrical characteristics** 

Symbol	Parameter	Test o	onditions	Min.	Тур.	Max.	Unit
I <sub>CEO</sub>	Collector cut-off current (I <sub>B</sub> = 0)	V <sub>CE</sub> = -60 V				-0.3	mA
I <sub>CES</sub>	Collector cut-off current (V <sub>BE</sub> = 0)	V <sub>CE</sub> =-100 V				-0.2	mA
I <sub>EBO</sub>	Emitter cut-off current (I <sub>C</sub> = 0)	V <sub>EB</sub> = -5 V				-1	mA
V <sub>CEO(sus)</sub>	Collector-emitter sustaining voltage (I <sub>B</sub> = 0)	I <sub>C</sub> = -30 mA		-100		.10	V
V <sub>CE(sat)</sub> <sup>(1)</sup>	Collector-emitter saturation voltage	I <sub>C</sub> = -1 A	I <sub>B</sub> = -125 mA		111	-0.7	V
V <sub>BE(on)</sub> <sup>(1)</sup>	Base-emitter voltage	I <sub>C</sub> = -1 A	V <sub>CE</sub> = -4 V	C	0,	-1.3	V
h <sub>FE</sub> <sup>(1)</sup>	DC current gain	$I_{C} = -200 \text{ mA}$ $I_{C} = -1 \text{ A}$	$V_{CE} = -4V$	40 15		75	
Pulsed d	 uration = 300 ms, duty cycle ≥	1.5%.	V <sub>CE</sub> = -4V	15		73	
1. Pulsed d	DC current gain  uration = 300 ms, duty cycle ≥	1.5%.	VCE = 44V	15		73	

Electrical characteristics TIP30C

## 2.1 Typical characteristic (curves)

Figure 2. DC current gain

Figure 3. DC current gain

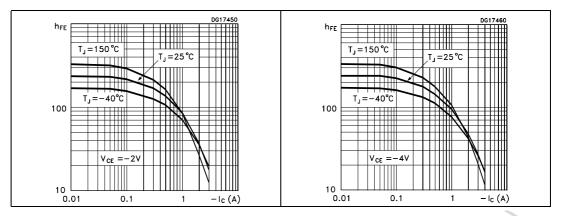


Figure 4. Collector-emitter saturation voltage

Figure 5. Base-emitter saturation voltage


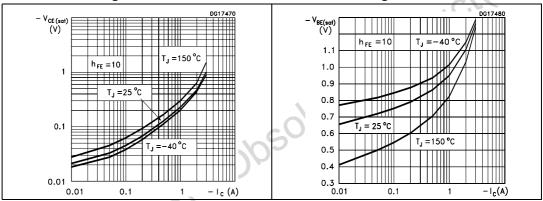


Figure 6. Resistive load switching time Figure 7. Resistive load switching time

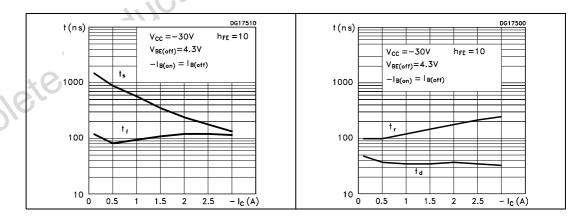

4/9

P<sub>tot</sub> (%)
100
| Sylvariant | S


Figure 8. Derating curve

## 2.2 Test circuits

Figure 9. Resistive load switching test circuit

100

T<sub>C</sub> (℃)

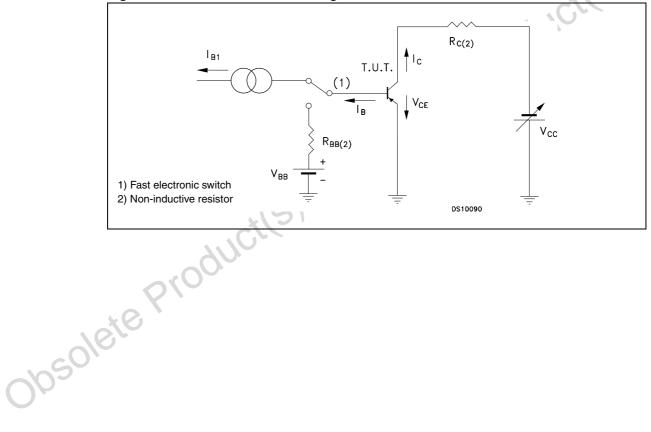

## 3 Package mechanical data


In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect . The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: <a href="https://www.st.com">www.st.com</a>

Obsolete Productis). Obsolete Productis)

6/9

#### TO-220 mechanical data

Di		mm			inch		
Dim	Min	Тур	Max	Min	Тур	Max	
А	4.40		4.60	0.173		0.181	
b	0.61		0.88	0.024		0.034	
b1	1.14		1.70	0.044		0.066	
С	0.49		0.70	0.019		0.027	
D	15.25		15.75	0.6		0.62	
D1		1.27			0.050		
Е	10		10.40	0.393		0.409	
е	2.40		2.70	0.094		0.106	
e1	4.95		5.15	0.194		0.202	
F	1.23		1.32	0.048		0.051	
H1	6.20		6.60	0.244		0.256	
J1	2.40		2.72	0.094		0.107	
L	13		14	0.511		0.551	
L1	3.50		3.93	0.137		0.154	
L20		16.40			0.645		
L30		28.90			1.137		
ØP	3.75		3.85	0.147		0.151	
Q	2.65		2.95	0.104		0.116	

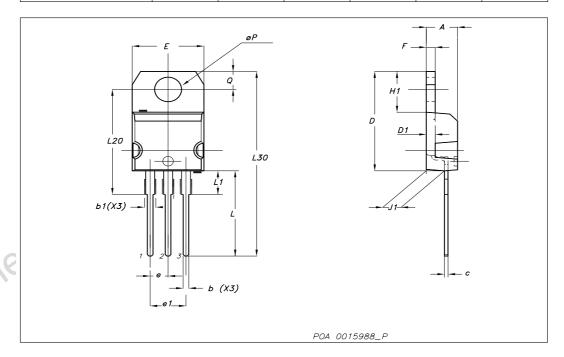

Revision history TIP30C

# 4 Revision history

Table 4. Document revision history

Date	Revision	Changes
11-Oct-2007	1	Initial release

Obsolete Product(s) - Obsolete Product(s)

8/9

#### Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

