
- Multiplexed I/O Ports Provide Improved Bit Density
- Four Modes of Operation:
 - Hold (Store)
 - Shift Right
 - Shift Left
 - Load Data
- Operate With Outputs Enabled or at High Impedance
- 3-State Outputs Drive Bus Lines Directly
- Can Be Cascaded for n-Bit Word Lengths
- Synchronous Clear
- Applications:
 - Stacked or Push-Down Registers
 - Buffer Storage
 - Accumulator Registers
- Package Options Include Plastic Small-Outline (DW) Packages, Ceramic Chip Carriers (FK), and Standard Plastic (N) and Ceramic (J) 300-mil DIPs


description

These 8-bit universal shift/storage registers feature multiplexed input/output (I/O) ports to achieve full 8-bit data handling in a 20-pin package. Two function-select (S0, S1) inputs and two output-enable (OE1, OE2) inputs can be used to choose the modes of operation listed in the function table.

SN54ALS323 . . . J PACKAGE SN74ALS323 . . . DW OR N PACKAGE (TOP VIEW)



SN54ALS323 . . . FK PACKAGE (TOP VIEW)



Synchronous parallel loading is accomplished by taking both S0 and S1 high. This places the 3-state outputs in the high-impedance state and permits data applied on the I/O ports to be clocked into the register. Reading out of the register can be accomplished while the outputs are enabled in any mode. Clearing occurs synchronously when the clear (CLR) input is low. Taking either OE1 or OE2 high disables the outputs but has no effect on clearing, shifting, or storing data.

The SN54ALS323 is characterized for operation over the full military temperature range of -55° C to 125° C. The SN74ALS323 is characterized for operation from 0° C to 70° C.

SN54ALS323, SN74ALS323 8-BIT UNIVERSAL SHIFT/STORAGE REGISTERS WITH SYNCHRONOUS CLEAR AND 3-STATE OUTPUTS


SDAS267A - DECEMBER 1982 - REVISED DECEMBER 1994

FUNCTION TABLE

MODE				INP	UTS							I/O P	ORTS				OUTI	PUTS
MODE	CLR	S1	S0	OE1†	OE2†	CLK	SL	SR	A/Q _A	B/QB	C/QC	D/QD	E/QE	F/Q _F	G/Q _G	H/Q _H	$Q_{A'}$	$Q_{H'}$
Clear	L L L	X L H	L X H	L L X	L L X	↑ ↑ ↑	X X X	X X X	L L X	L L L	L L							
Hold	H H	L X	L X	L L	L L	X L	X X	X X	Q _{A0} Q _{A0}	Q _{B0} Q _{B0}	Q _{C0}	Q _{D0} Q _{D0}	Q _{E0} Q _{E0}	Q _{F0} Q _{F0}	Q _{G0} Q _{G0}	Q _{H0} Q _{H0}	Q _{A0} Q _{A0}	Q _{H0} Q _{H0}
Shift Right	H H	L L	H H	L L	L L	↑ ↑	X X	H L	H L	Q _{An} Q _{An}	Q _{Bn} Q _{Bn}	Q _{Cn} Q _{Cn}	Q _{Dn} Q _{Dn}	Q _{En} Q _{En}	Q _{Fn} Q _{Fn}	Q _{Gn} Q _{Gn}	H L	Q _{Gn} Q _{Gn}
Shift Left	H H	H H	L L	L L	L L	↑ ↑	H L	X X	Q _{Bn} Q _{Bn}	Q _{Cn} Q _{Cn}	Q _{Dn} Q _{Dn}	Q _{En} Q _{En}	Q _{Fn} Q _{Fn}	Q _{Gn} Q _{Gn}	Q _{Hn} Q _{Hn}	H L	Q _{Bn} Q _{Bn}	H L
Load	Н	Н	Н	Χ	Χ	1	Χ	Х	а	b	С	d	е	f	g	h	а	h

NOTE: a . . . h = the level of the steady-state input at inputs A through H, respectively. This data is loaded into the flip-flops while the flip-flop outputs are isolated from the I/O terminals.

logic symbol‡

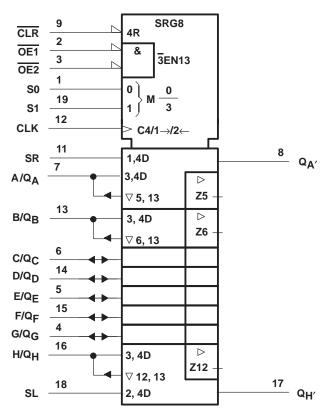


[‡] This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.



[†] When one or both output-enable inputs are high, the eight I/O terminals are disabled to the high-impedance state; however, sequential operation or clearing of the register is not affected.

logic diagram (positive logic)

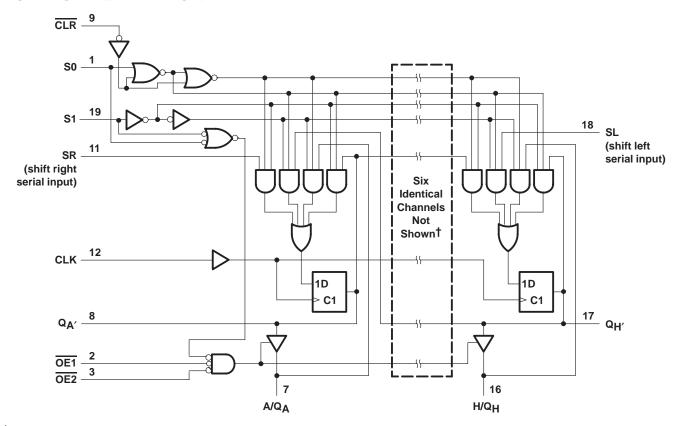

† I/O ports not shown: B/QB (13), C/QC (6), D/QD (14), E/QE (5), F/QF (15), and G/QG (4).

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)‡

Supply voltage, V _{CC}		7 V
Input voltage, V _I : All inputs		7 V
Operating free-air temperature range, T _A :	SN54ALS323	-55°C to 125°C
	SN74ALS323	0°C to 70°C
Storage temperature range		-65°C to 150°C

[‡] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

SN54ALS323, SN74ALS323 8-BIT UNIVERSAL SHIFT/STORAGE REGISTERS WITH SYNCHRONOUS CLEAR AND 3-STATE OUTPUTS

SDAS267A - DECEMBER 1982 - REVISED DECEMBER 1994

recommended operating conditions

				SN	54ALS3	23	SN	74ALS3	23	UNIT
						MAX	MIN	NOM	MAX	UNIT
Vcc	Supply voltage			4.5	5	5.5	4.5	5	5.5	V
VIH	High-level input voltage						2			V
VIL	Low-level input voltage				0.7			0.8	V	
la	High-level output current	$Q_{A'}$ or $Q_{H'}$				-0.4			-0.4	mA
IOH	riign-ievei output current	Q _A thru Q _H				-1			-2.6	IIIA
la.	Low-level output current QA' or QH' QA thru QH					4			8	mA
IOL						12			24	IIIA
TA	Operating free-air temperature					125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

	ADAMETED	TEST OF	NOITIONS	SN	54ALS3	23	SN	74ALS3	23	LINIT
-	ARAMETER	TEST CC	MIN	TYP [†]	MAX	MIN	TYP [†]	MAX	UNIT	
VIK		V _{CC} = 4.5 V,	I _I = -18 mA			-1.5			-1.5	V
	Any output	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V},$	$I_{OH} = -0.4 \text{ mA}$	V _{CC} -2	2		V _{CC} -2	2		
Vон	Q _A thru Q _H	V _{CC} = 4.5 V	I _{OH} = - 1 mA	2.4	3.3					V
	QA tiliti QH	VCC = 4.5 V	$I_{OH} = -2.6 \text{ mA}$				2.4	3.2		
	Q _A , or Q _H ,	V _{CC} = 4.5 V	I _{OL} = 4 mA		0.25	0.4		0.25	0.4	
V	QA' or QH'	vCC = 4.5 v	$I_{OL} = 8 \text{ mA}$					0.35	0.5	V
VOL	On thru Ou	V _{CC} = 4.5 V	I _{OL} = 12 mA		0.25	0.4		0.25	0.4	V
	Q _A thru Q _H	VCC = 4.5 V	I _{OL} = 24 mA					0.35	0.5	
1.	A thru H	Vaa 55V	V _I = 5.5 V			0.1			0.1	mA
l _l	Any others	V _{CC} = 5.5 V	V _I = 7 V			0.1			0.1	mA
l _{IH} ‡		V _{CC} = 5.5 V,	V _I = 2.7 V			20			20	μΑ
. +	S0, S1, SR, SL	V 55V	V 04V			-0.2			-0.2	A
I _{IL} ‡	Any others	$V_{CC} = 5.5 \text{ V},$	$V_I = 0.4 V$		•	-0.1			-0.1	mA
ء .	Q _A ' or Q _H '	V 55V	V- 0.05.V	-15	•	-70	-15		-70	A
los§	Q _A thru Q _H	V _{CC} = 5.5 V,	$V_0 = 2.25 \text{ V}$	-20	-20 -112		-30		-112	mA
			Outputs high		15	28		15	28	
Icc		V _{CC} = 5.5 V	Outputs low		22 38			22	38	mA
			Outputs disabled		23	40		23	40	

 $[\]frac{1}{1}$ All typical values are at $V_{CC} = 5$ V, $T_{A} = 25$ °C.

[‡] For I/O ports (Q_A thru Q_H), the parameters I_{IH} and I_{IL} include the off-state output current.

[§] The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, los.

timing requirements over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)

				SN54A	LS323	SN74A	LS323	UNIT
				MIN	MAX	MIN	MAX	UNIT
fclock	Clock frequency (at 50% duty cycle)			0	17	0	17	MHz
t _W	Pulse duration	CLK high or low		22		16.5		ns
		S0 or S1	25		20			
	Satura tima hafara CLIVA	Coriol or porollol data	High	18		16		
t _{su}	Setup time before CLK↑	Serial or parallel data	Low	15		6		ns
		CLR active	25		20			
	Inactive-state setup time before CLK↑†	CLR	18		16			
.	Hold time after CLK↑	S0 or S1	0		0			
^t h	Hold time after CLK	Serial or parallel data		0		0		ns

[†] Inactive-state setup time is also referred to as recovery time.


switching characteristics (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _C C _L R1 R2 T _A	UNIT			
			SN54A	LS323	SN74A	LS323	
			MIN	MAX	MIN	MAX	
f _{max}			17		17		MHz
^t PLH	CLK	O a thru O a	2	19	4	13	ns
^t PHL	CLK	Q _A thru Q _H	4	25	7	19	115
^t PLH	CLV	00.0	2	21	5	15	ns
^t PHL	CLK	Q _A ′ or Q _H ′	4	25	8	18	113
^t PZH	OE1, OE2	O. thru O.	5	22	6	16	ns
^t PZL	OE1, OE2	Q _A thru Q _H	6	27	8	22	115
^t PZH	CO C4	O . Abres O	5	27	7	17	ns
^t PZL	S0, S1	Q _A thru Q _H	6	27	8	22	115
^t PHZ	OE1, OE2	O . Albama O	1	15	1	8	
^t PLZ	OE1, OE2	Q _A thru Q _H	4	38	5	15	ns
^t PHZ	S0, S1	OA thru Ou	1	16	1	12	
^t PLZ	30, 31	Q _Д thru Q _Н	4	34	8	25	ns

For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.



PARAMETER MEASUREMENT INFORMATION SERIES 54ALS/74ALS AND 54AS/74AS DEVICES

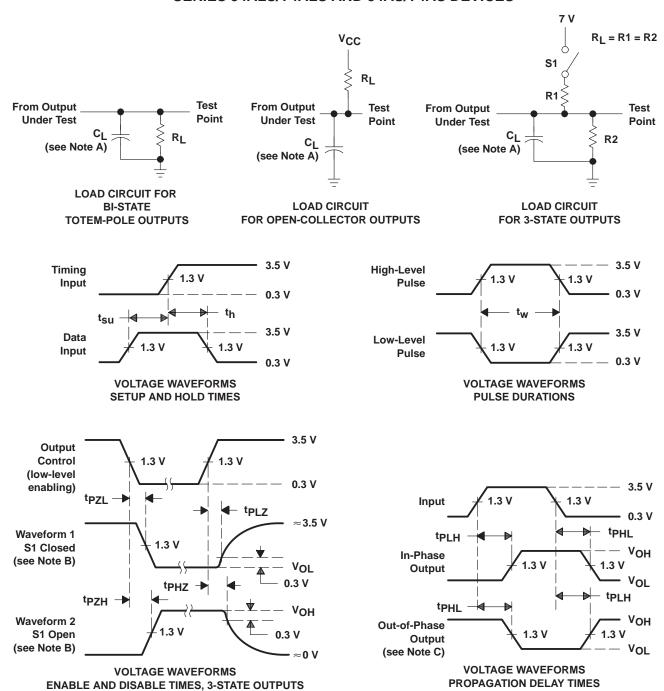

NOTES: A. C_L includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. When measuring propagation delay items of 3-state outputs, switch S1 is open.
- D. All input pulses have the following characteristics: PRR \leq 1 MHz, $t_f = t_f = 2$ ns, duty cycle = 50%.
- E. The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuits and Voltage Waveforms







i.com 9-Oct-2007

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
83021022A	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type
8302102RA	ACTIVE	CDIP	J	20	1	TBD	A42 SNPB	N / A for Pkg Type
8302102SA	ACTIVE	CFP	W	20	1	TBD	A42	N / A for Pkg Type
SN54ALS323J	ACTIVE	CDIP	J	20	1	TBD	A42 SNPB	N / A for Pkg Type
SN74ALS323DW	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74ALS323DWE4	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74ALS323DWG4	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74ALS323DWR	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74ALS323DWRE4	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74ALS323DWRG4	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74ALS323N	ACTIVE	PDIP	N	20	20	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
SN74ALS323N3	OBSOLETE	PDIP	N	20		TBD	Call TI	Call TI
SN74ALS323NE4	ACTIVE	PDIP	N	20	20	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
SN74ALS323NSR	ACTIVE	SO	NS	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74ALS323NSRE4	ACTIVE	SO	NS	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74ALS323NSRG4	ACTIVE	SO	NS	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SNJ54ALS323FK	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type
SNJ54ALS323J	ACTIVE	CDIP	J	20	1	TBD	A42 SNPB	N / A for Pkg Type
SNJ54ALS323W	ACTIVE	CFP	W	20	1	TBD	A42	N / A for Pkg Type

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)



PACKAGE OPTION ADDENDUM

9-Oct-2007

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing			Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74ALS323DWR	SOIC	DW	20	2000	330.0	24.4	10.8	13.0	2.7	12.0	24.0	Q1





*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74ALS323DWR	SOIC	DW	20	2000	346.0	346.0	41.0

FK (S-CQCC-N**)

28 TERMINAL SHOWN

LEADLESS CERAMIC CHIP CARRIER



NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a metal lid.
- D. The terminals are gold plated.
- E. Falls within JEDEC MS-004



MECHANICAL DATA

NS (R-PDSO-G**)

14-PINS SHOWN

PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



14 LEADS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

W (R-GDFP-F20)

CERAMIC DUAL FLATPACK



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only.
- E. Falls within Mil-Std 1835 GDFP2-F20



DW (R-PDSO-G20)

PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MS-013 variation AC.



N (R-PDIP-T**)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products Amplifiers amplifier.ti.com Data Converters dataconverter.ti.com DSP dsp.ti.com Clocks and Timers www.ti.com/clocks Interface interface.ti.com Logic logic.ti.com Power Mgmt power.ti.com Microcontrollers microcontroller.ti.com www.ti-rfid.com RF/IF and ZigBee® Solutions www.ti.com/lprf

Applications	
Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2008, Texas Instruments Incorporated