


**PROPRIETARY INFORMATION:**  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/15/18	BS

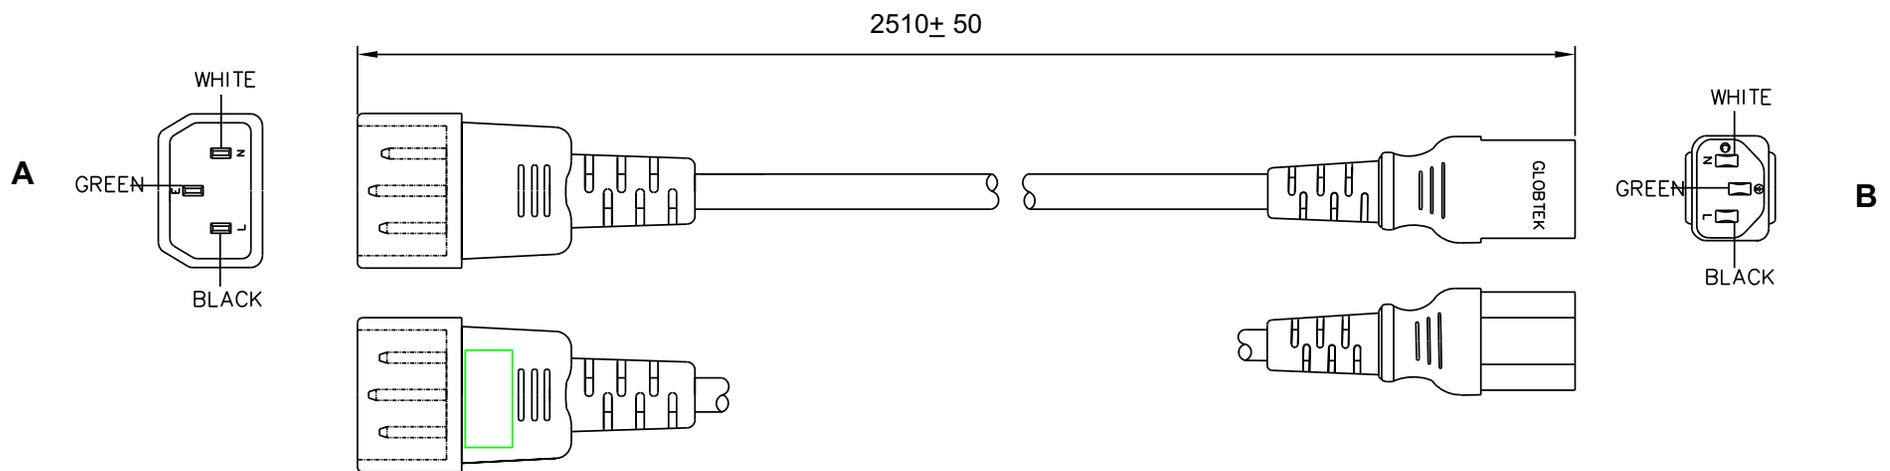

**GENERAL SPECIFICATIONS:**

RATING: 10A / 250V  
 CABLE TYPE / SIZE: SJT, AWG 18 X 3 CONDUCTORS  
 TEMPERATURE RATING: 60° C  
 CONDUCTOR COLORS: BLACK / WHITE / GREEN  
 CABLE JACKET COLOR: BLACK  
 OVERALL LENGTH (L): 2510 ± 50 mm  
 CABLE OUTER DIAMETER: 7.8 ± 0.1 mm  
 END 'A' PLUG: IEC 320 / C14 MALE  
 END 'B' : IEC 320 / C13 FEMALE  
 APPROVALS PLUG: UL, CSA or cUL  
 APPROVALS CABLE: UL, CSA or cUL  
 APPROVALS CONNECTOR: UL, CSA or cUL

**PACKING:**

BULK PACK

**NOTES:**

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



**RELEASED**  
 By N.Frost at 9:15 am, Sep 18, 2018



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
REV.			<b>TOLERANCES:</b> DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005	 <b>GlobTek, Inc.</b> www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
SHEET				
INIT.BY: BS	DATE: 09/15/18	MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013	DWG TITLE: NORTH AMERICAN IEC JUMPER CORDSET	
DRAWN: NF	DATE: 09/15/18	FSCN No.: G, CC	SIZE A	REV. A
APRVD: DMR	DATE: 09/15/18	SCALE: NONE	PART NO: 7011438F2705(R)	SHEET 1/1

**Foot Note:**  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

**Limitation of Use:**  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice