


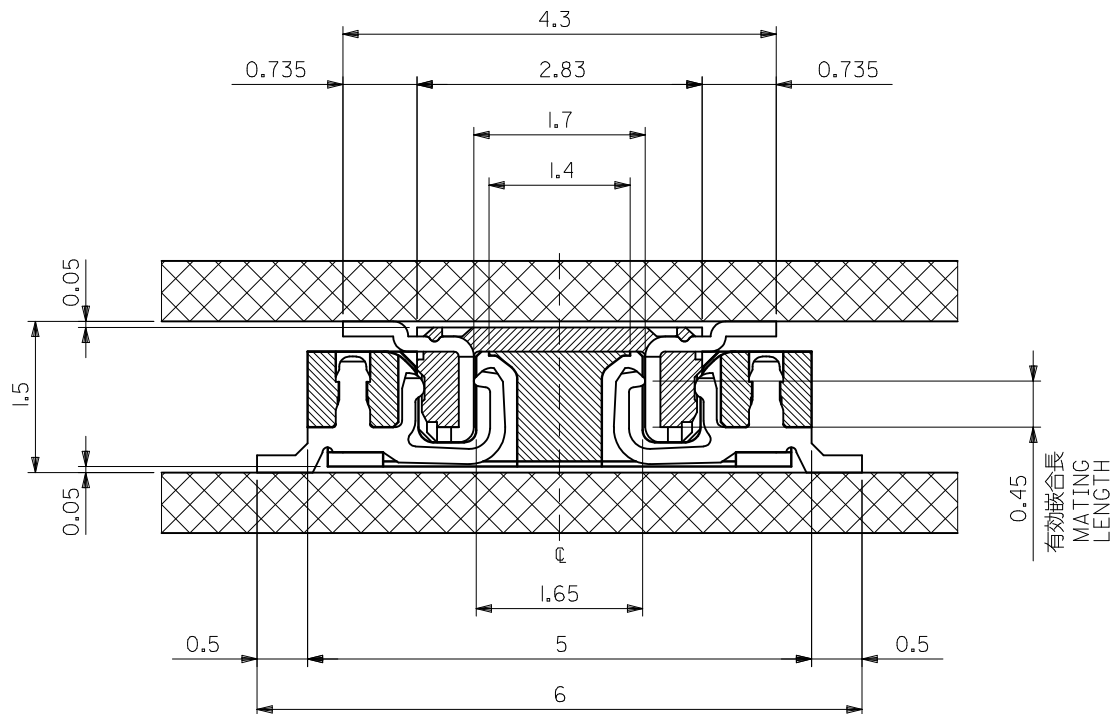

嵌合断面図 (参考)
MATED DRAWING (REF.)

注記 NOTES:

1. 使用材料 MATERIAL
ウェハー : 液晶ポリマー ガラス充填 ,UL94V-0 (黒)
WAFER : LIQUID CRYSTAL POLYMER (GLASS FILLED), UL94V-0 (COLOR:BLACK)
ピン : 黄銅 (t=0.15)
PIN : BRASS(t=0.15)
2. メッキ仕様 PLATING
金メッキ 0.25 MICROMETER MINIMUM (コンタクト部)
GOLD 0.25 MICROMETER MINIMUM (CONTACT AREA).
金メッキ 0.4 MICROMETER MAXIMUM (テール部)
GOLD 0.4 MICROMETER MAXIMUM (TAIL AREA).
下地メッキ : ニッケルメッキ 1.5 MICROMETER MINIMUM
UNDER PLATING : NICKEL 1.5 MICROMETER MINIMUM.
3. (全極数/2) = 偶数の場合に適用。
APPLY FOR (CIRCUIT/2)=EVEN.
4. 嵌合相手 : 54722 シリーズ, 54037 シリーズ
MATE WITH : 54722 SERIES, 54037 SERIES.
5. テール平坦度は、0.1 MAXIMUM
TAIL COPLANARITY TO BE 0.1 MAXIMUM.

REVISED EC NO: J2012-0135 2011/07/01 DRWN: YON002 CH'KD: TASAKAWA 2011/07/01 APPR: MSASAO 2011/07/29 K	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.20	DRAWN BY SAIHARA	DATE 2000/10/05	TITLE 0.5 B-TO-B CONN PLUG ASSY (HGT=1.5)				
		10 OVER 30 UNDER	± 0.25	CHECKED BY MSASAO	DATE 2003/03/31					
		30 OVER	± 0.30	APPROVED BY MSASAO	DATE 2003/03/31	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO. SEE SHEET 1		DOCUMENT NO. SD-55560-006			SHEET NO. 2 OF 2	
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

DWG. NO.
SD-55560-008

F

D

▽

C

B

DO NOT SCALE DRAWING

8

7

6

5

4

3

2

1

F

E




D

C

B

A

55560008.S02

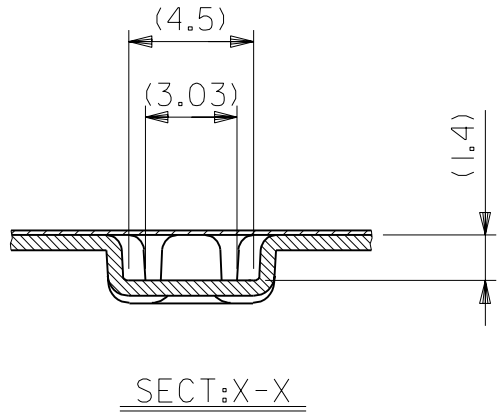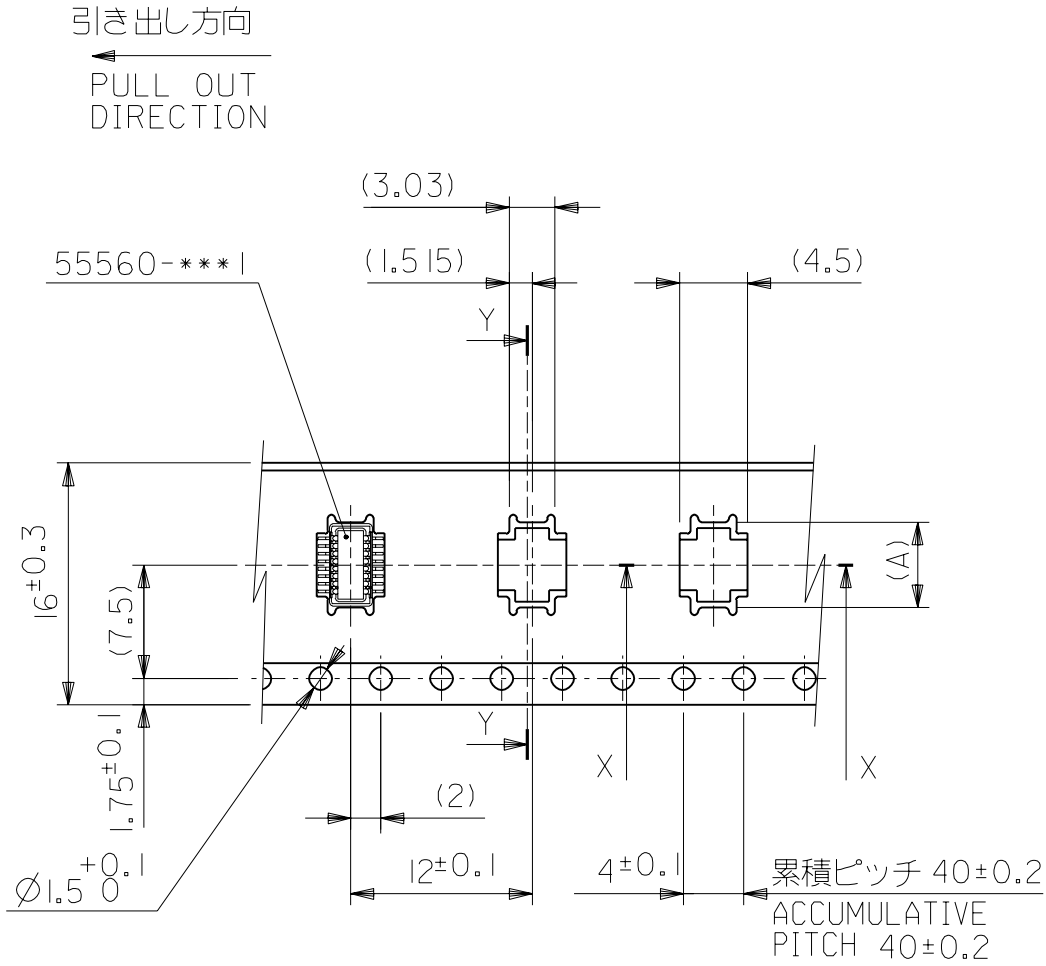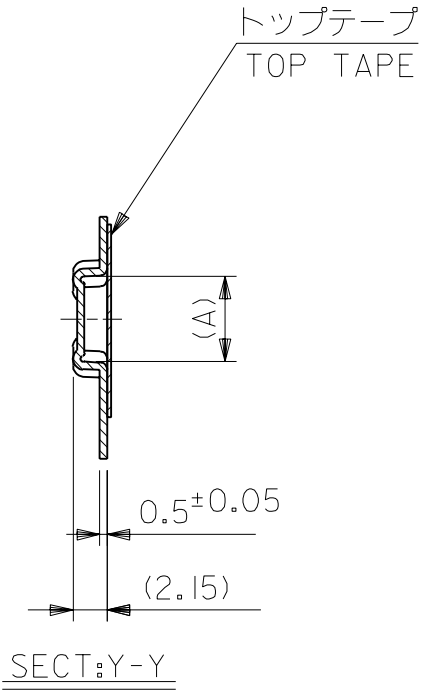

1 6mm幅キャリアテープ
16mm WIDTH CARRIER TAPE

16	17.5	5.65	55560-0168	16
キャリアテープ幅 CARRIER TAPE WIDTH	B	(A)	MATERIAL NO.	極数 CIRCUIT
MODEL NO.	55560-***8	DIMENSIONS:		SHT
SCALE	DESIGN UNITS	20°	20°	REV
1:1	mm INCH	mm INCH	mm ONLY	20°
DRAWN BY & DATE S.AIHARA '00/11/28		TITLE:		
CHECKED BY & DATE T.ITO '01/01/30		0.5 B-To-B Conn PLUG Assy (Hgt=1.5) Embstp Pkg		
APPROVED BY & DATE M.FUKUSHIMA '01/01/30		MOLEX INCORPORATED		
CAD FILENAME 55560008.S02		MATERIAL NO. SEE CHART	DRAWING NO. SD-55560-008	SHEET NO. 2 OF 3
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.				SIZE B

DESIGN NO. DRWN: CHK: APPR:	DESIGN NO. DRWN: CHK: APPR:	DESIGN NO. DRWN: CHK: APPR:	REVISED DESIGN NO. JC2001-0604 DRWN: R.SHIINA '01/01/30 CHK: T.ITO APPR: M.FUKUSHIMA	PROPOSED DESIGN NO. JC2001-0402 DRWN: S.AIHARA '00/11/28 CHK: T.ITO APPR: M.FUKUSHIMA	DESCRIPTION
			A	O	REV

MATERIAL 材料	SHEET 1 OF 3 参照 REFER TO SHEET 1 OF 3	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差
FINISH 仕上げ	10 UNDER 未満	±0.2
	10 OVER 以上 30 UNDER 未満	±0.25
	30 OVER 以上	±0.3
WIRE RANGE 適用電線範囲	ANGLE 角度	±3°
INS. RANGE 被覆外径		

8

7

6

5

4

3

2

EN-02J(097) MXJ-54

DWG. NO.
SD-55560-008

F

D

C

B

DO NOT SCALE DRAWING

8

7

6

5

4

3

2

1

F

E




D

C

B

A

55560008.S03

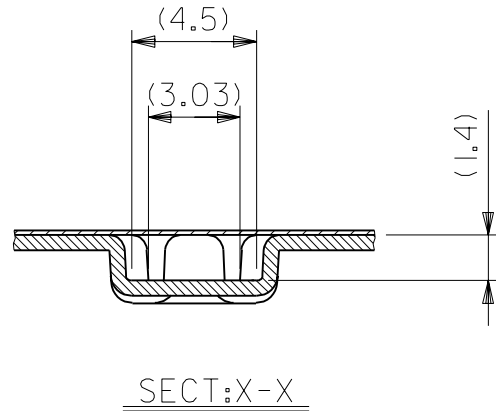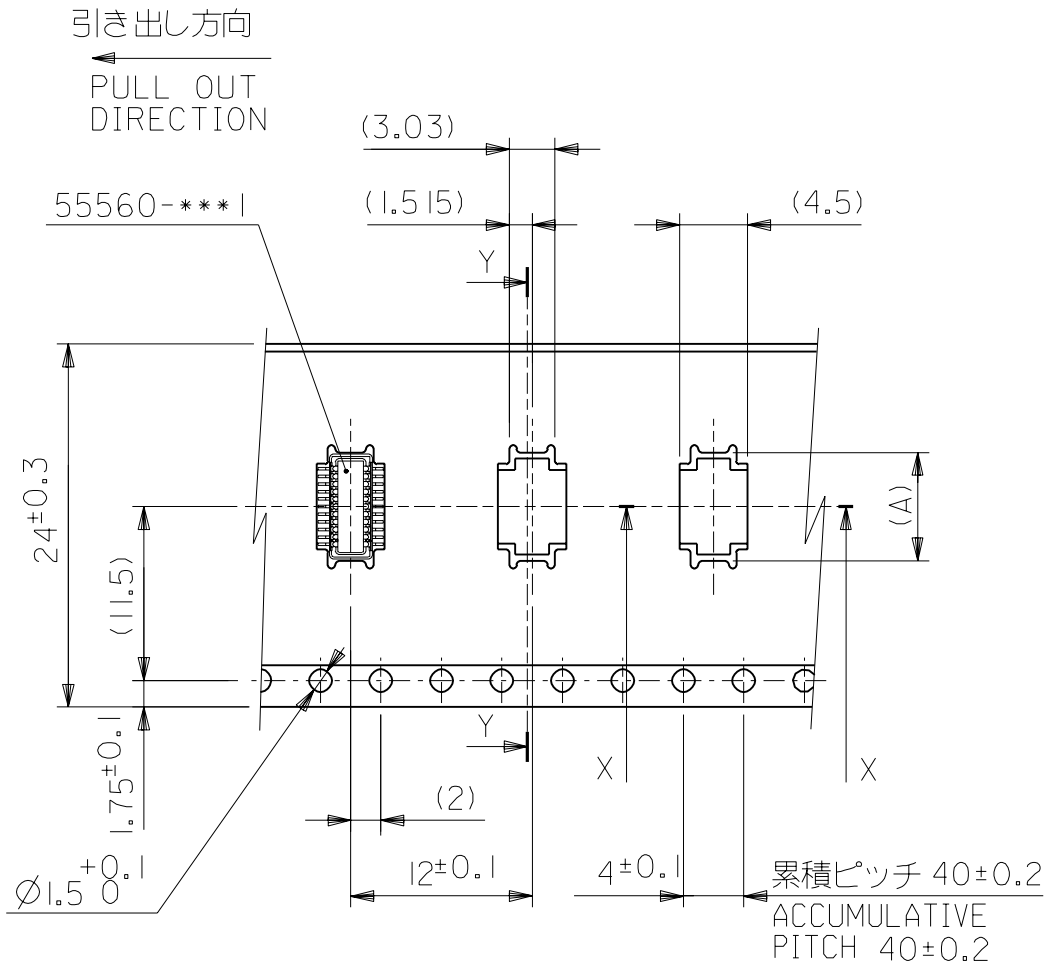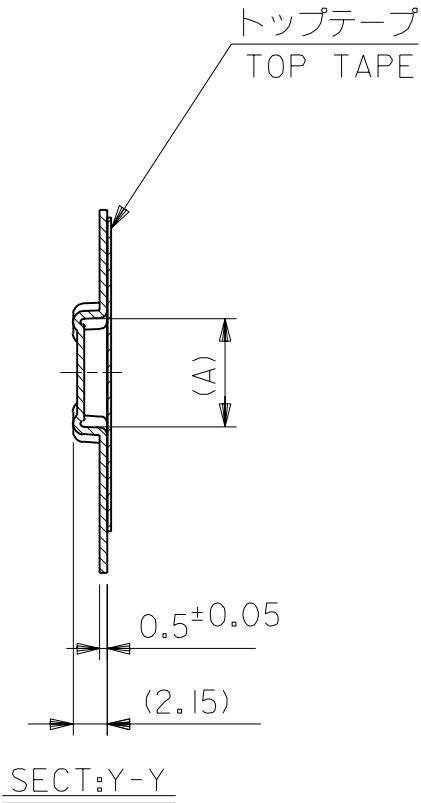

24		25.5	7.15	55560-0228		22	
キャリアテープ幅 CARRIER TAPE WIDTH		B	(A)	MATERIAL NO.		極数 CIRCUIT	
MODEL NO.		55560-***8		DIMENSIONS:		SHT	REV
SCALE //	DESIGN UNITS ☒ mm ☐ INCH	 THIRD ANGLE PROJECTION		☐ mm INCH	☐ INCH mm	☒ mm ONLY	22 2

SIZE
B

8

7

6

5

4

3

2

EN-02J(097) MXJ-54