

Shock-Safe Fuseholder, 6.3 x 32 mm, Fingergrip, Rear-Side, NF



250 VAC · 2.5W/10A (NF)10A (UL/CSA)



GAM T1 NNO

Description

- Screw type fuse carrier

Standards

- UL 4248-1 / UL 512
- CSA C22.2 no. 39
- NF C 93-436 - Modèle HB02
- Contrôle de Conformité de Qualité (CCQ)

Approvals

- UL File Number: E41738
- CSA File Number: 23151



Weblinks

pdf-datasheet, html-datasheet, General Product Information, Approvals, CE declaration of conformity, RoHS, CHINA-RoHS, REACH, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check, Detailed request for product

Technical Data

Fuse-Link	6.3 x 32 mm	Soldering Methods	Iron
Mounting	Panel Mount, Rear Side	Contact Resistance	< mΩ at 20 mV
Mounting	Fixing Nut	Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Terminal	Solder	Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Rated Voltage	250 VAC	Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Rated current	10A (NF), 10A (UL/CSA)	Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Rated Power Acceptance IEC	2.5 W / 10 A @ Ta 23 °C Admissible power acceptance at higher ambient temperature see derating curves	Dump Heat	acc. to NF C 20-604
Degree of Protection	IP 40 / IP 67	Climatic Composite	acc. to NF C 20-619 Phases D and F
Protection Class	Suitable for appliances with protection class I or II acc. to IEC 61140	Admissible Torque on Fixing Nut	max 1.2 Nm
Admissible Ambient Air Temp.	-40 °C to 85 °C	Panel Thickness s	max 5 mm
Climatic Category	40/085/21 acc. to IEC 60068-1		
Material: Socket	Thermoset, black		
Unit Weight	19 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	Type, Rated voltage, Rated current, Approvals, HB2		

Dimension

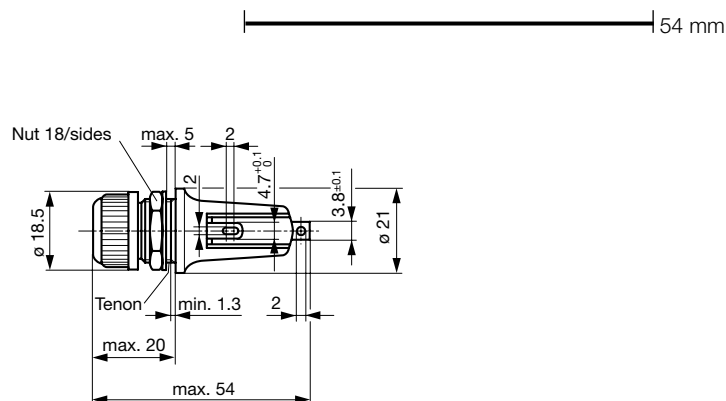

Mounting holes

All Variants

Holder	Cap	Fuse-Link	Degree of Protection				GAM T1	NNO	Reference	Order Number
•	Fingergrip	6.3 x 32mm	IP 40	•	•	•	•	•	23312P	7092.2520
•	Fingergrip	6.3 x 32mm	IP 67						23312ERJJP	7092.2630

Most Popular.

Availability for all products can be searched real-time:<http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit Bulk (100 pcs.)