



8		7	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT 20		BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.	
PART NUMBER	REVISION	DESCRIPTION	FEED TYPE
2151314-1	D	FINE CRIMP HEIGHT ADJUST	MECHANICAL
2151314-2	D	FINE CRIMP HEIGHT ADJUST	PNEUMATIC
7-2151314-1	D	MECHANICAL AND CRIMP TOOLING KIT	MECHANICAL
7-2151314-2	D	PNEUMATIC AND CRIMP TOOLING KIT	PNEUMATIC
7-2151314-*	-	SEE CRIMP TOOLING KITS BELOW	-

ATLANTIC VERSION TERMINATOR
INTERFACE ADAPTER

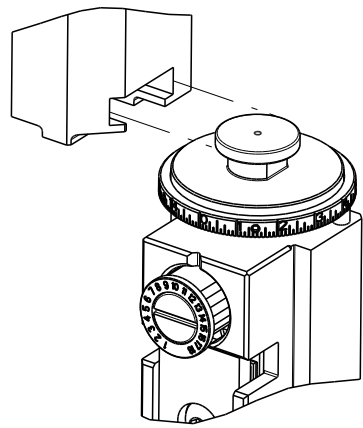


APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	2.79 mm [.110]	F
STABILIZER	2.79 mm [.110]	O
INSULATION	3.94 mm [.155]	F
APPLICATOR INSTRUCTIONS 408-35042		

PART NO	REV	WIRE SIZE	WIRE CRIMPER	STABILIZER CRIMPER	INSULATION CRIMPER	ANVIL
7-2151314-7	C	12 AWG	7-456408-6	815664-2	6-2119582-7	1633923-5
7-2151314-8	C	14 AWG	2-456408-5	815664-6	6-2119582-7	1633923-5
7-2151314-9	C	18-16 AWG	2-456408-6	815664-7	6-2119582-7	1633923-5

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: AMP-IN			
WIRE STRIP LENGTH 4.83-5.59 mm [.190-.220 IN]			INSULATION DIAMETER RANGE Ø2.29-3.81 mm [.090-.150 IN]
TERMINAL APPLICATION SPECIFICATION		114-1016	
		-	-
		-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
3-794013-1			



WIRE SIZE	WIRE CRIMP HEIGHT mm [INCH]	WIRE CRIMPER PART NUMBER	STABILIZER CRIMP HEIGHT mm [INCH]	STAIBILZER CRIMPER PART NUMBER	CRIMP HEIGHT REFERENCE SETTING
12 AWG	2.16+/-0.05 [.085+/- .002]	7-456408-6	2.79+/-0.05 [.110+/- .002]	815664-2	9.1

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: AMP-IN			
WIRE STRIP LENGTH 4.83-5.59 mm [.190-.220 IN]			INSULATION DIAMETER RANGE Ø2.29-3.81 mm [.090-.150 IN]
TERMINAL APPLICATION SPECIFICATION		114-1016	
		-	-
		-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
3-770060-1			

WIRE SIZE	WIRE CRIMP HEIGHT mm [INCH]	WIRE CRIMPER PART NUMBER	STABILIZER CRIMP HEIGHT mm [INCH]	STAIBILZER CRIMPER PART NUMBER	CRIMP HEIGHT REFERENCE SETTING
14 AWG	1.40+/-0.05 [.055+/- .002]	2-456408-5	2.75+/-0.10 [.108+/- .004]	815664-6	7.6
18-16 AWG	1.09+/-0.05 [.043+/- .002]	2-456408-6	2.40+/-0.10 [.094+/- .004]	815664-7	7.8



- RECOMMENDED SPARE PARTS
- REFER TO SUPPLIED INSTRUCTION SHEET FOR CLEANING, LUBRICATION AND STORAGE OF APPLICATOR.
- APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEMS 242.
- CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- ITEMS 1 & 178 TO BE USED WITH 12 AWG ONLY. ITEMS TO BE SHIPPED WITH APPLICATOR.
- ITEMS 253 & 254 TO BE USED WITH 14 AWG ONLY. ITEMS TO BE SHIPPED WITH APPLICATOR.

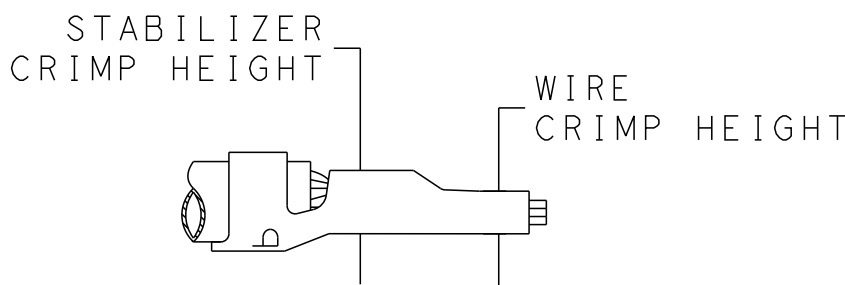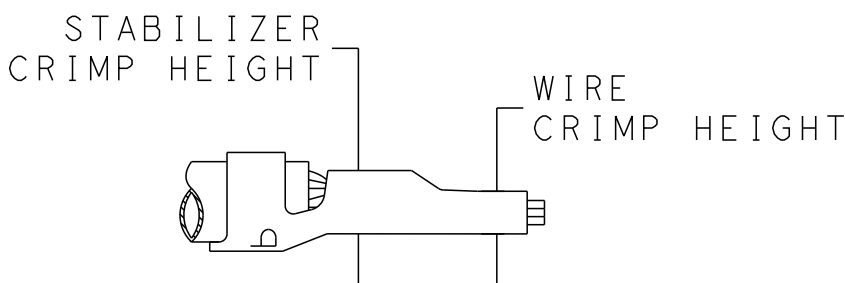

*WARNING
ON INSTALLATION, SET WIRE DISC TO CRIMP HEIGHT REFERENCE SETTING FOR LARGEST WIRE SIZE. CRIMP HEIGHT REFERENCE SETTINGS GREATER THAN THE VALUE SHOWN MAY CAUSE DAMAGE TO THE CRIMP TOOLING. REFER TO THE INSTRUCTION SHEET FOR PROPER SETUP AND ADJUSTMENTS.

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

LOC		DIST		REVISIONS				
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		B1		ECR-15-011816	10AUG2015	JH	UG	
		C		ECR-16-005909	09MAY2016	KH	LZ	
		D		ECR-18-005882	19APR2018	FZ	KZ	
		D1		ECR-19-004559	21MAR2019	TB	GB	


7	1	1	-	-	1	1	1	1	2-456408-6	CRIMPER, WIRE PREMIUM	256
7	1	-	-	-	1	1	1	1	815664-7	CRIMPER, WIRE-O	255
6	1	-	1	-	1	1	1	1	2-456408-5	CRIMPER, WIRE PREMIUM	254
6	1	-	1	-	1	1	1	1	815664-6	CRIMPER, WIRE-O	253
		-	-	-	1	-	1	-	2119640-1	PUSH ROD, AIR FEED	250
		-	-	-	1	-	1	-	1803259-1	BUSHING, FLANGED	249
		-	-	-	1	-	1	-	2119641-1	FEED CAM, AIR FEED	248
		-	-	-	1	1	1	1	2119082-6	CAM, SNAIL, INSULATION ADJUSTMENT	244
		-	-	-	1	1	1	1	2079764-1	WASHER, WAVE SPRING, CREST-TO-CREST	243
3		-	-	-	1	1	1	1	2119083-1	RETAINER, INSULATION DIAL	242
		-	-	-	1	1	1	1	7-18023-7	SCR, SKT HD CAP M3 X 4.0	241
		-	-	-	-	1	-	1	2119580-1	MECHANICAL FEED ASSEMBLY	239
		-	-	-	1	-	1	-	2063440-1	AIR FEED MODULE	238
5	1	-	-	1	1	1	1	1	7-456408-6	CRIMPER, WIRE PREMIUM	178
		-	-	-	2	-	2	-	21045-3	RING, RETAIN, EXTERN, 3/16 CRESCENT	172
		-	-	-	REF	REF	REF	REF	994970-2	COUNTER, MAGNETIC	164
		-	-	-	1	-	1	-	240638-1	SPRING, FEED FINGER	163
		-	-	-	1	-	1	-	3-23627-7	PIN, RETAIN, GRVD, 3/16 X .854	137
		-	-	-	1	-	1	-	2119799-1	HOLDER,FEED FINGER, AF	136
		-	-	-	1	1	1	1	1-18028-2	WASHER, FLAT, REG M4	119
		-	-	-	1	1	1	1	2844908-1	SCREW, LOCKING	99
		-	-	-	1	1	1	1	2844907-1	POST, LOCKING	98
		-	-	-	1	1	1	1	455888-5	SPACER, CRIMPER	82
		-	-	-	1	1	1	1	1803607-1	DOCUMENTATION PACKAGE	71
		-	-	-	1	1	1	1	2119740-1	TAG,IDENTIFICATION	67
		-	-	-	2	2	2	2	2168078-1	SCREW, DRIVE, RH, RoHS, 2 x .188	66
		-	-	-	1	1	1	1	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	60
		-	-	-	1	1	1	1	5-18022-5	SCR, HEX HD CAP, M4 X 6.0	59
		-	-	-	1	1	1	1	1338685-1	PAWL, FEED	56
		-	-	-	4	4	4	4	2168083-3	SCR, SKT HD CAP, RoHS, M4 X 12.0	54
		-	-	-	1	2	1	2	18023-9	SCR, SKT HD CAP M4 X 6.0	49
		-	-	-	-	1	-	1	2119652-1	FEED CAM, PRE FEED	48
		-	-	-	-	1	-	1	2119653-1	FEED CAM, POST FEED	47
		-	-	-	1	1	1	1	1803583-9	APPLICATOR BASIC ASSEMBLY, SF	46
		-	-	-	1	1	1	1	1803515-1	RAM ASSEMBLY, SF ATLANTIC	44
		-	-	-	1	1	1	1	1803602-1	SCR, BHSC, RoHS (M8 X 25)	41
		-	-	-	1	1	1	1	469465-4	STOP, WIRE	34
		-	-	-	2	2	2	2	2079383-5	SCR, BHSC, RoHS (M4 X 20)	33
		-	-	-	2	2	2	2	2-2844962-8	SPACER, CYLINDRICAL, STRIP GUIDE	30
		-	-	-	1	1	1	1	2844992-1	ASSEMBLY, STRIP GUIDE	29
		-	-	-	1	1	1	1	455888-3	SPACER, CRIMPER	28
		-	-	-	1	1	1	1	1320928-2	STRIP GUIDE	24
		-	-	-	1	1	1	1	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	21
		-	-	-	1	1	1	1	1-18028-2	WASHER, FLAT, REG M4	20
		-	-	-	1	1	1	1	2119533-3	STRIPPER, SIDE FEED	19
1		-	-	-	1	1	1	1	2119806-1	INSERT, SHEAR	13
		-	-	-	1	1	1	1	3-22280-3	SPRING, COMPRESSION	12
		-	-	-	1	1	1	1	1-356885-4	STOP, SHEAR	11
		-	-	-	1	1	1	1	2119805-1	SHEAR HOLDER, FRONT	10
		-	-	-	1	1	1	1	1803095-1	FLOATING SHEAR, FRONT -	9
1	1	1	1	1	2	2	1	1	1633923-5	ANVIL, COMBINATION	8
		-	-	-	-	-	-	-	-	-	7
		-	-	-	-	-	-	-	-	-	6
		-	-	-	1	1	1	1	1-2119757-2	DEPRESSOR, SHEAR	5
		-	-	-	1	1	1	1	238011-8	BLOCK, CRIMPER SPACER	4
1	1	1	2	2	1	1	1	1	6-2119582-7	CRIMPER, INSULATION F PREMIUM	3
		-	-	-	1	1	1	1	455888-7	SPACER, CRIMPER	2
5	1	-	-	1	2	2	1	1	815664-2	CRIMPER, WIRE-O	1

-79 -78 -77 -72 -71 -2 -1						PART NO		DESCRIPTION				ITEM NO	
THIS DRAWING IS A CONTROLLED DOCUMENT FOR TWO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE WITHOUT NOTICE. ANY DIMENSIONAL CHANGES SHOULD BE CONTACTED FOR THE LATEST REVISION.						DWN L. GROSS 31JAN2013 CHK T. ELBIN 31JAN2013 APVD M. CLIFFORD 31JAN2013		 TE Connectivity Harrisburg, PA 17105-3608					
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:				NAME		Ocean Side Feed Applicator -					
mm													
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±				PRODUCT SPEC - APPLICATION SPEC -							
MATERIAL		FINISH		WEIGHT		A1 00779		CAGE CODE		DRAWING NO		RESTRICTED TO	
-		-		-		G=2151314		-		-		-	
Customer Accessible Production Drawing								SCALE		1:2		SHEET 1 OF 4	REV D1


SHEETS 3 & 4 ARE NOT REQUIRED FOR ATLANTIC VERSION

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
A	66	-	-	SEE SHEET 1	-	-	-





FEED TYPE
MECHANICAL

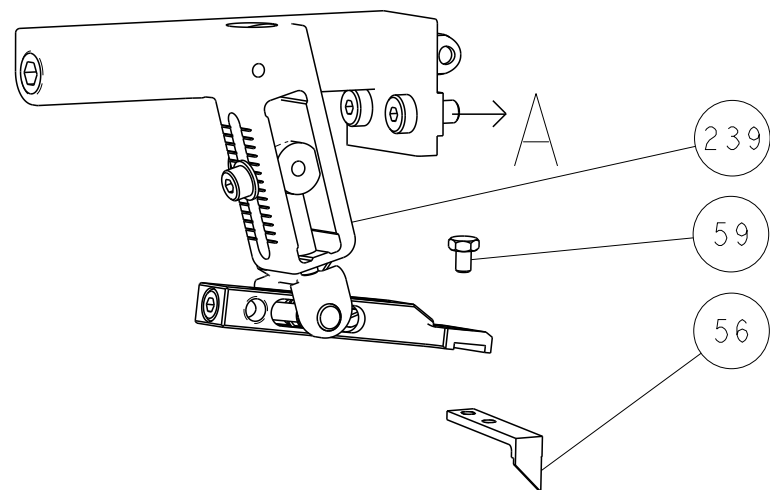


PNEUMATIC

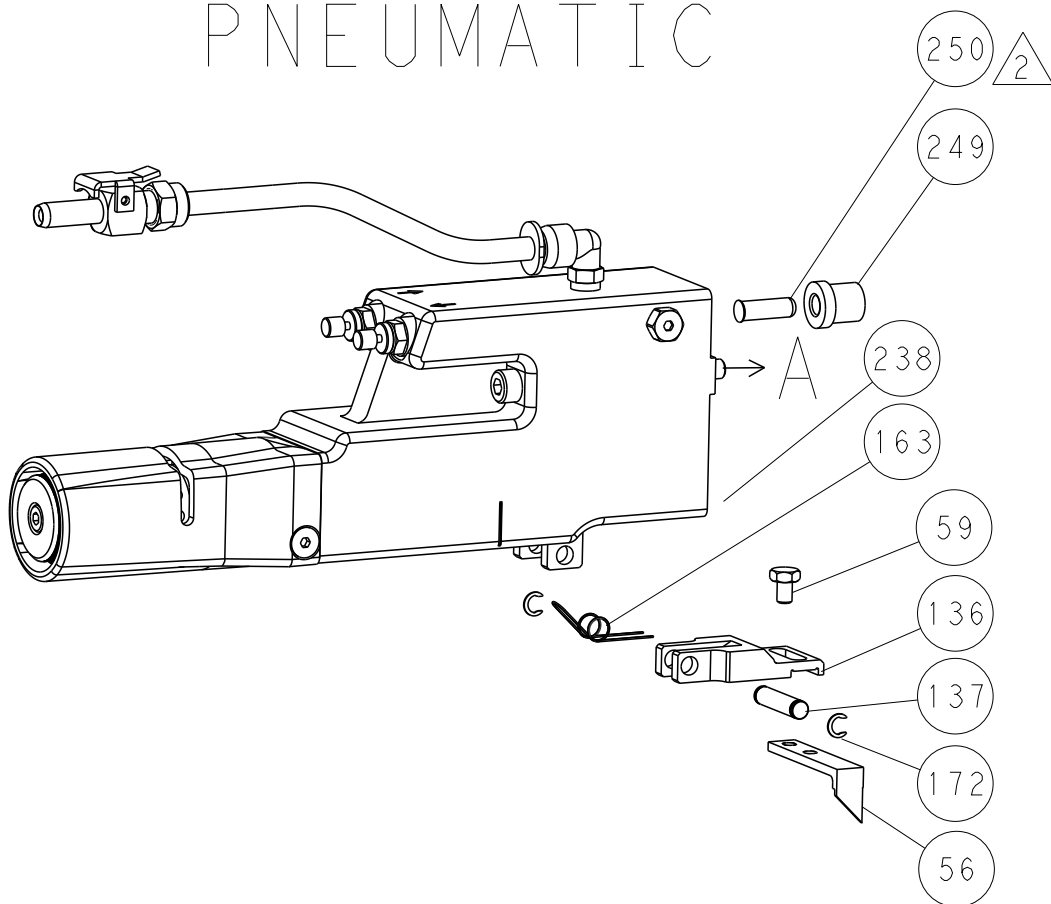


CAM POSITIONS

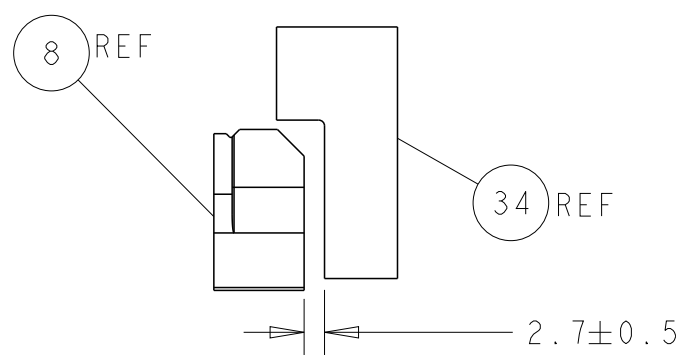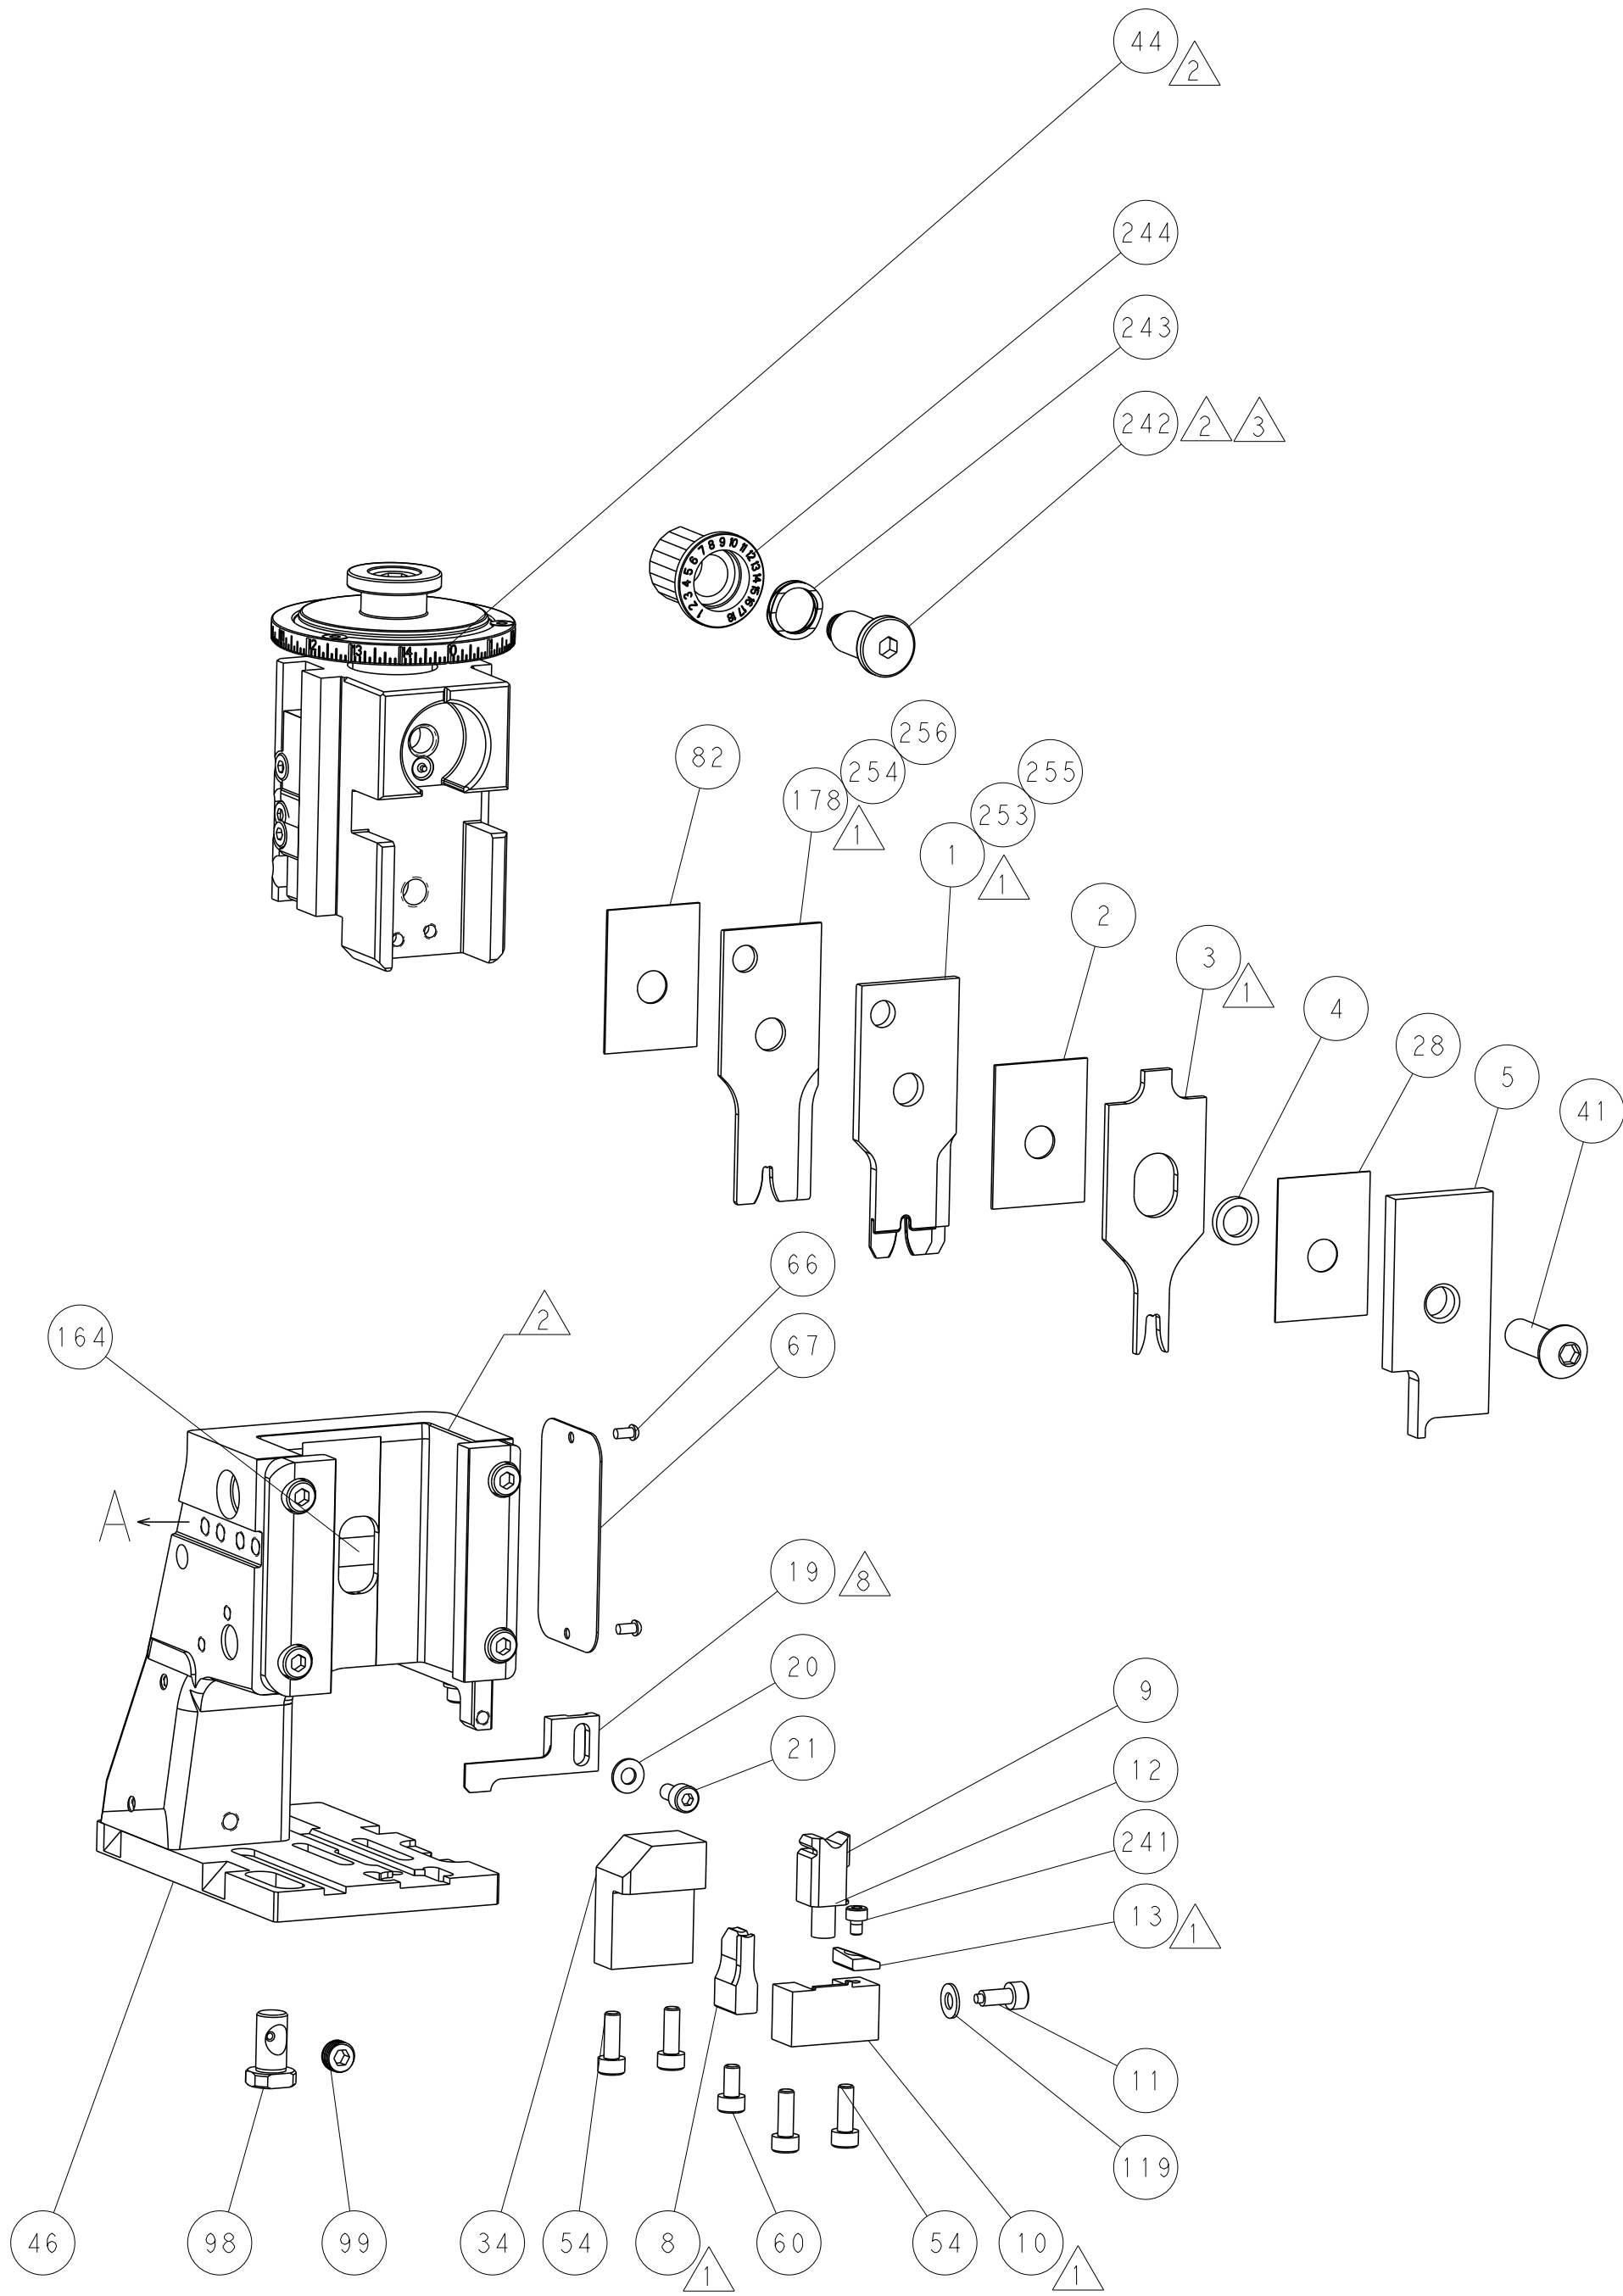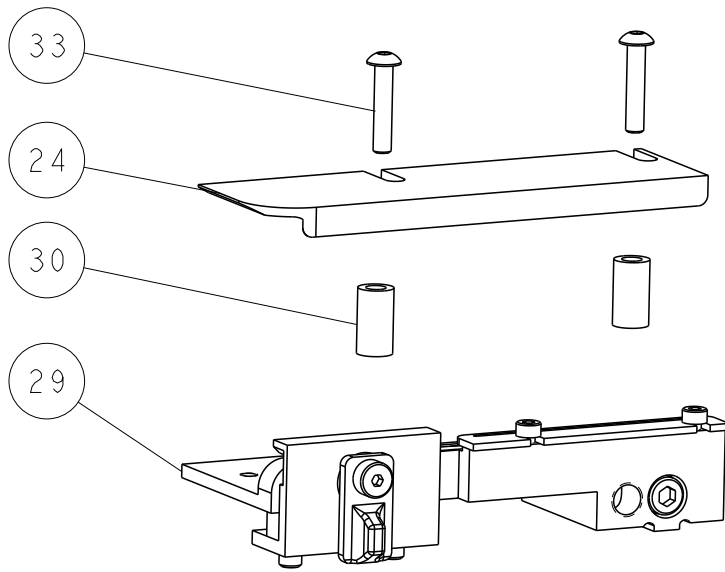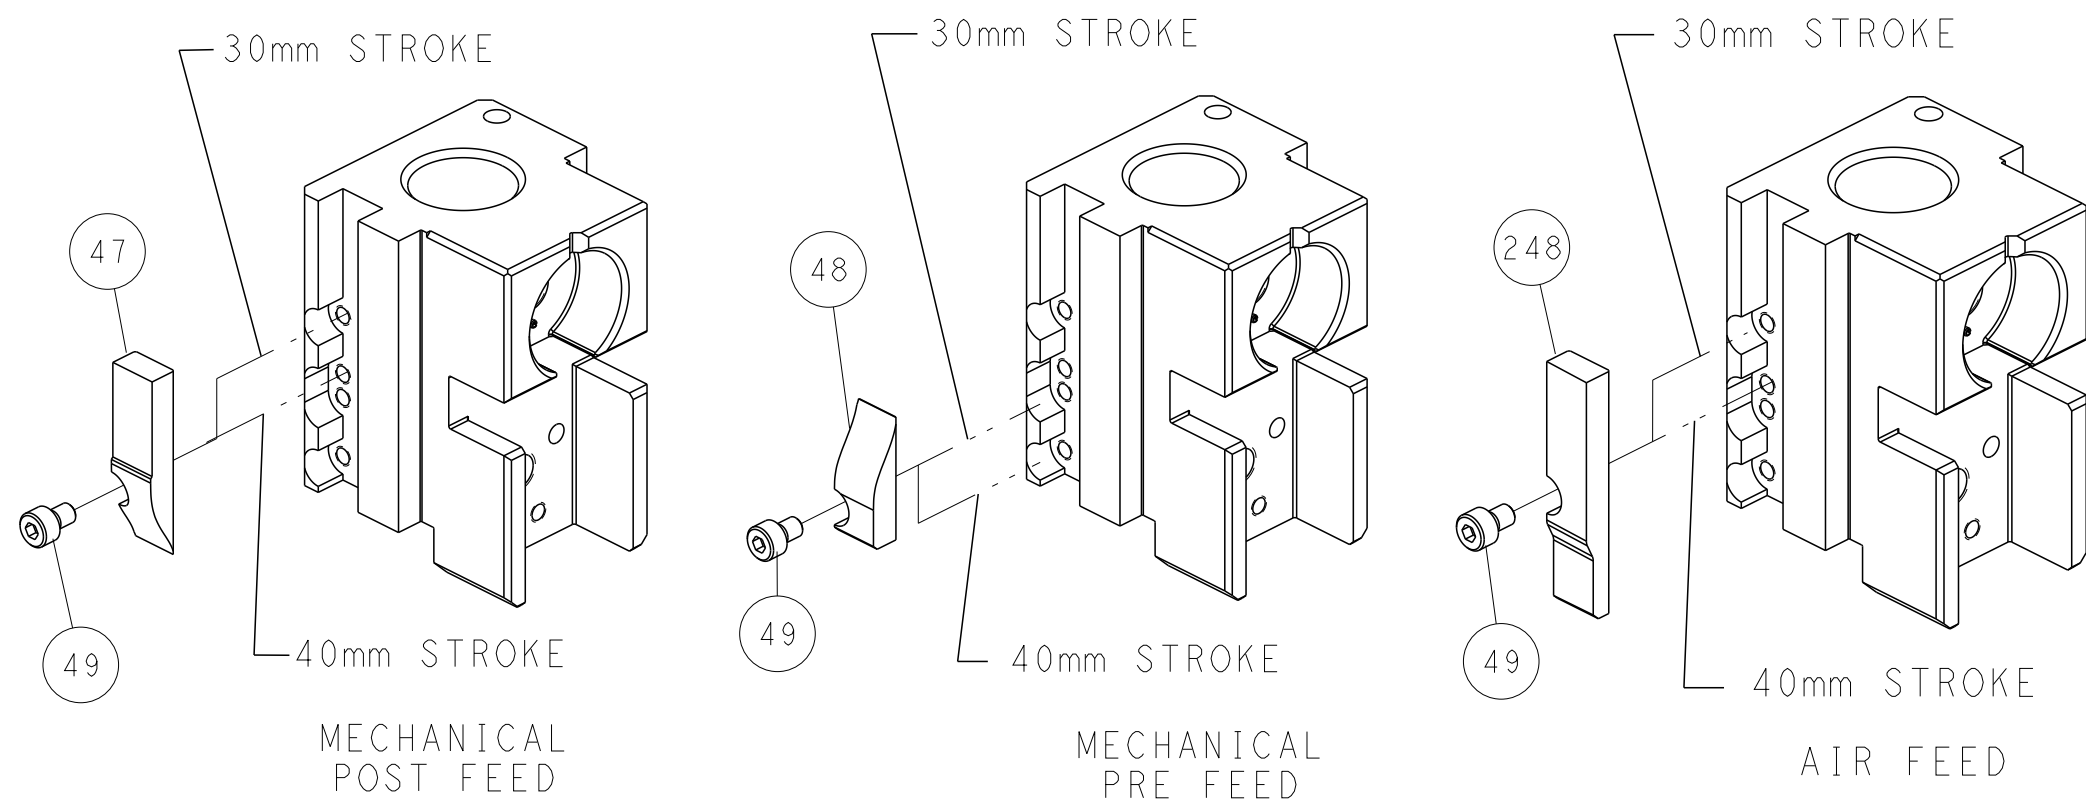

WIRE STOP LOCATION

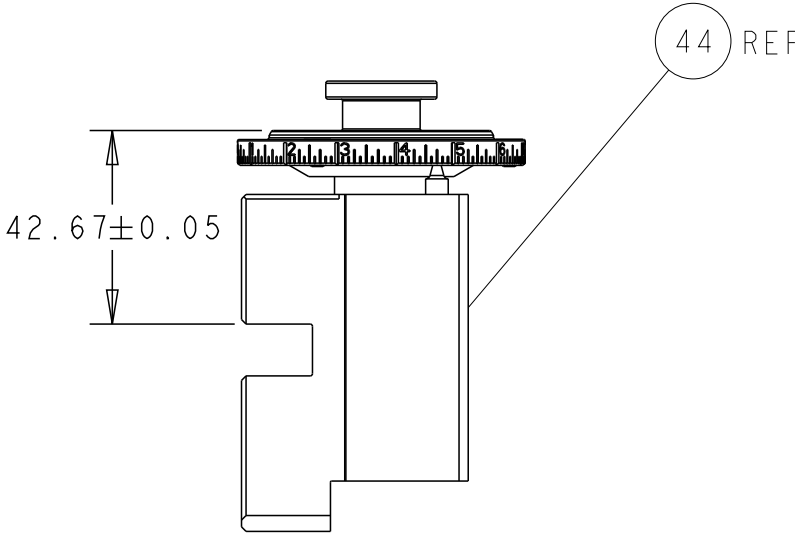

RAM SET-UP

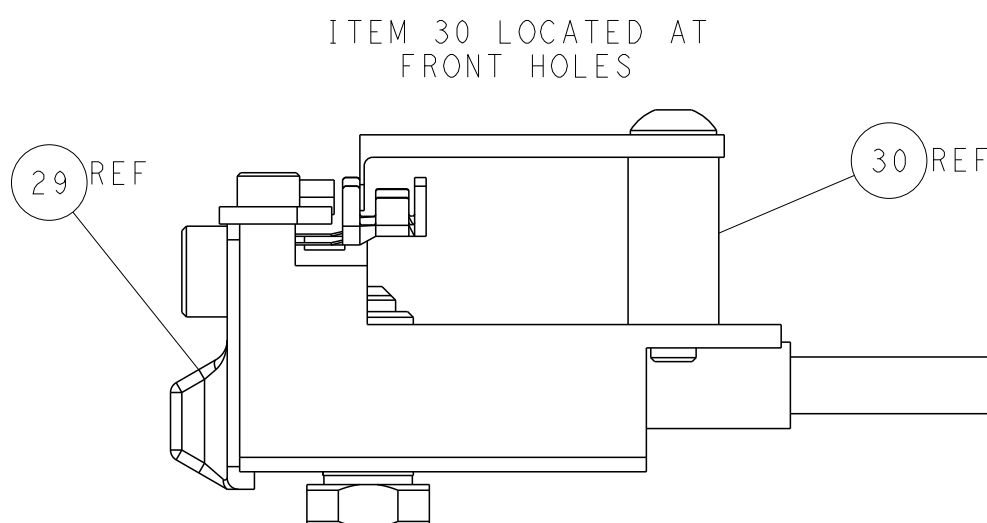

FEED TRACK POSITION
GUIDE BY INSULATION BARREL

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS THE RESPONSIBILITY OF THE USER TO CONTACT THE ORGANIZATION FOR THE LATEST REVISION.		DWN	L. GROSS	31JAN2013	TE Connectivity Harrisburg, PA 17105-3608	
		CHK	T. ELBIN	31JAN2013		
		APVD	M. CLIFFORD	31JAN2013	NAME	
		PRODUCT SPEC			Ocean Side Feed Applicator	
		APPLICATION SPEC			-	
		WEIGHT			RESTRICTED TO	
		Customer Accessible Production Drawing			-	
		SCALE			REV	
		1:2			D1	
		SHEET			OF	
		2			4	
		CAGE CODE			DRAWING NO	
		A1			00779	
		DRAWING NO			C=2151314	
		-			-	

SHEETS 3 & 4 ARE NOT REQUIRED FOR ATLANTIC VERSION

8		7	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
20		20	
© COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.			
PART NUMBER	REVISION	DESCRIPTION	FEED TYPE
2-2151314-1	D	FINE CRIMP HEIGHT ADJUST	MECHANICAL
2-2151314-2	D	FINE CRIMP HEIGHT ADJUST	PNEUMATIC
7-2151314-*	-	SEE CRIMP TOOLING KITS BELOW	-

PACIFIC VERSION TERMINATOR
INTERFACE ADAPTER



APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	2.79 mm [.110]	F
STABILIZER	2.79 mm [.110]	O
INSULATION	3.94 mm [.155]	F
APPLICATOR INSTRUCTIONS 408-35042		

PART NO	REV	WIRE SIZE	WIRE CRIMPER	STABILIZER CRIMPER	INSULATION CRIMPER	ANVIL
7-2151314-7	C	12 AWG	7-456408-6	815664-2	6-2119582-7	1633923-5
7-2151314-8	C	14 AWG	2-456408-5	815664-6	6-2119582-7	1633923-5
7-2151314-9	C	18-16 AWG	2-456408-6	815664-7	6-2119582-7	1633923-5

TERMINAL DATA: TE TERMINAL TE CRIMP SPECIFICATION			
TERMINAL NAME: AMP-IN			
WIRE STRIP LENGTH 4.83-5.59 mm [.190-.220 IN]		INSULATION DIAMETER RANGE Ø2.29-3.81 mm [.090-.150 IN]	
TERMINAL APPLICATION SPECIFICATION 114-1016		-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
3-794013-1			

WIRE SIZE 12 AWG		CRIMP HEIGHT mm [INCH] 2.16+/-0.05 [.085+/- .002]		WIRE CRIMPER PART NUMBER 7-456408-6	STABILIZER CRIMP HEIGHT mm [INCH] 2.79+/-0.05 [.110+/- .002]	STAIBILZER CRIMPER PART NUMBER 815664-2	CRIMP HEIGHT REFERENCE SETTING 9.1
---------------------	--	---	--	--	---	--	---------------------------------------

TERMINAL DATA: TE TERMINAL TE CRIMP SPECIFICATION			
TERMINAL NAME: AMP-IN			
WIRE STRIP LENGTH 4.83-5.59 mm [.190-.220 IN]		INSULATION DIAMETER RANGE Ø2.29-3.81 mm [.090-.150 IN]	
TERMINAL APPLICATION SPECIFICATION 114-1016		-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
3-770060-1			

WIRE SIZE 14 AWG 18-16 AWG		CRIMP HEIGHT mm [INCH] 1.40+/-0.05 [.055+/- .002] 1.09+/-0.05 [.043+/- .002]		WIRE CRIMPER PART NUMBER 2-456408-5 2-456408-6	STABILIZER CRIMP HEIGHT mm [INCH] 2.75+/-0.10 [.108+/- .004] 2.40+/-0.10 [.094+/- .004]	STAIBILZER CRIMPER PART NUMBER 815664-6 815664-7	CRIMP HEIGHT REFERENCE SETTING 7.6 7.8
----------------------------------	--	---	--	--	---	--	--



- 1 RECOMMENDED SPARE PARTS
- 2 REFER TO SUPPLIED INSTRUCTION SHEET FOR CLEANING, LUBRICATION AND STORAGE OF APPLICATOR.
- 3 APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEMS 242.
- 4 CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- 5 ITEMS 1 & 178 TO BE USED WITH 12 AWG ONLY. ITEMS TO BE SHIPPED WITH APPLICATOR.
- 6 ITEMS 253 & 254 TO BE USED WITH 14 AWG ONLY. ITEMS TO BE SHIPPED WITH APPLICATOR.

*WARNING
ON INSTALLATION, SET WIRE DISC TO CRIMP HEIGHT REFERENCE SETTING FOR LARGEST WIRE SIZE. CRIMP HEIGHT REFERENCE SETTINGS GREATER THAN THE VALUE SHOWN MAY CAUSE DAMAGE TO THE CRIMP TOOLING, REFER TO THE INSTRUCTION SHEET FOR PROPER SETUP AND ADJUSTMENTS.

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

2		1					
LOC	DIST	REVISIONS					
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


1	-	-	1	1	2-456408-6	CRIMPER, WIRE PREMIUM	256
1	-	-	1	1	815664-7	CRIMPER, WIRE-O	255
1	-	-	1	1	2-456408-5	CRIMPER, WIRE PREMIUM	254
1	-	-	1	1	815664-6	CRIMPER, WIRE-O	253
-	-	-	1	-	2119640-1	PUSH ROD, AIR FEED	250
-	-	-	1	-	1803259-1	BUSHING, FLANGED	249
-	-	-	1	1	2119082-6	CAM, SNAIL, INSULATION ADJUSTMENT	244
-	-	-	1	1	2079764-1	WASHER, WAVE SPRING, CREST-TO-CREST	243
3	-	-	1	1	2119083-1	RETAINER, INSULATION DIAL	242
-	-	-	1	1	7-18023-7	SCR, SKT HD CAP M3 X 4.0	241
-	-	-	-	1	2119580-1	MECHANICAL FEED ASSEMBLY	239
-	-	-	1	-	2063440-1	AIR FEED MODULE	238
5	1	-	1	1	7-456408-6	CRIMPER, WIRE PREMIUM	178
-	-	-	2	-	21045-3	RING, RETAIN, EXTERN, 3/16 CRESCENT	172
-	-	-	REF	REF	994970-2	COUNTER, MAGNETIC	164
-	-	-	1	-	240638-1	SPRING, FEED FINGER	163
-	-	-	1	-	2119641-2	FEED CAM, AIR FEED	151
-	-	-	1	1	2168083-8	SCR, SKT HD CAP, RoHS, M4 X 16	144
-	-	-	4	4	2168083-9	SCR, SKT HD CAP, RoHS, M4 X 20	143
-	-	-	-	1	2119653-2	FEED CAM, POST FEED	142
-	-	-	1	1	1-1803583-0	APPLICATOR BASIC ASSEMBLY, SF	141
-	-	-	1	1	1803516-1	RAM ASSEMBLY, SF PACIFIC	140
-	-	-	1	-	3-23627-7	PIN, RETAIN, GRVD, 3/16 X .854	137
-	-	-	1	-	2119799-1	HOLDER,FEED FINGER, AF	136
-	-	-	1	1	1-18028-2	WASHER, FLAT, REG M4	119
-	-	-	1	1	2844908-1	SCREW, LOCKING	99
-	-	-	1	1	2844907-1	POST, LOCKING	98
-	-	-	1	1	455888-5	SPACER, CRIMPER	82
-	-	-	1	1	1803607-1	DOCUMENTATION PACKAGE	71
-	-	-	1	1	2119740-1	TAG,IDENTIFICATION	67
-	-	-	2	2	2168078-1	SCREW, DRIVE, RH, RoHS, 2 x .188	66
-	-	-	1	1	5-18022-5	SCR, HEX HD CAP, M4 X 6.0	59
-	-	-	1	1	1338685-1	PAWL, FEED	56
-	-	-	1	2	18023-9	SCR, SKT HD CAP M4 X 6.0	49
-	-	-	-	1	2119652-1	FEED CAM, PRE FEED	48
-	-	-	1	1	1803602-1	SCR, BHSC, RoHS (M8 X 25)	41
-	-	-	1	1	469465-4	STOP, WIRE	34
-	-	-	2	2	2079383-5	SCR, BHSC, RoHS (M4 X 20)	33
-	-	-	2	2	2-2844962-8	SPACER, CYLINDRICAL, STRIP GUIDE	30
-	-	-	1	1	2844992-1	ASSEMBLY, STRIP GUIDE	29
-	-	-	1	1	455888-3	SPACER, CRIMPER	28
-	-	-	1	1	1320928-2	STRIP GUIDE	24
-	-	-	1	1	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	21
-	-	-	1	1	1-18028-2	WASHER, FLAT, REG M4	20
-	-	-	1	1	2119533-3	STRIPPER, SIDE FEED	19
1	-	-	1	1	2119806-1	INSERT, SHEAR	13
-	-	-	1	1	3-22280-3	SPRING, COMPRESSION	12
-	-	-	1	1	1-356885-4	STOP, SHEAR	11
1	-	-	1	1	2119805-1	SHEAR HOLDER, FRONT	10
1	-	-	1	1	1803095-1	FLOATING SHEAR, FRONT -	9
1	1	1	1	1	1633923-5	ANVIL, COMBINATION	8
-	-	-	-	-	-	-	7
-	-	-	-	-	-	-	6
-	-	-	1	1	1-2119757-2	DEPRESSOR, SHEAR	5
-	-	-	1	1	238011-8	BLOCK, CRIMPER SPACER	4
1	1	1	1	1	6-2119582-7	CRIMPER, INSULATION F PREMIUM	3
-	-	-	1	1	455888-7	SPACER, CRIMPER	2
5	1	-	1	1	815664-2	CRIMPER, WIRE-O	1

THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE USER SHALL BE RESPONSIBLE FOR OBTAINING THE LATEST EDITION.		DWN L. GROSS 31 JAN 2013	TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK T. ELBIN 31 JAN 2013	NAME Ocean Side Feed Applicator	
		APVD M. CLIFFORD 31 JAN 2013	SIZE 00779	
MATERIAL -		PRODUCT SPEC -	CAGE CODE -	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.005 1 PLC ±.005 2 PLC ±.005 3 PLC ±.005 4 PLC ±.005 ANGLES ±.005 FINISH -		APPLICATION SPEC -	DRAWING NO 2151314	
WEIGHT -		RESTRICTED TO -	Customer Accessible Production Drawing	
SCALE 1:2		SHEET 3 OF 4		REV D1


SHEETS 1 & 2 ARE NOT REQUIRED FOR PACIFIC VERSION

LOC		DIST		REVISIONS					
A		P	LYR	DESCRIPTION			DATE	DWN	APVD
				SEE SHEET 1			-	-	-






FEED TYPE
MECHANICAL

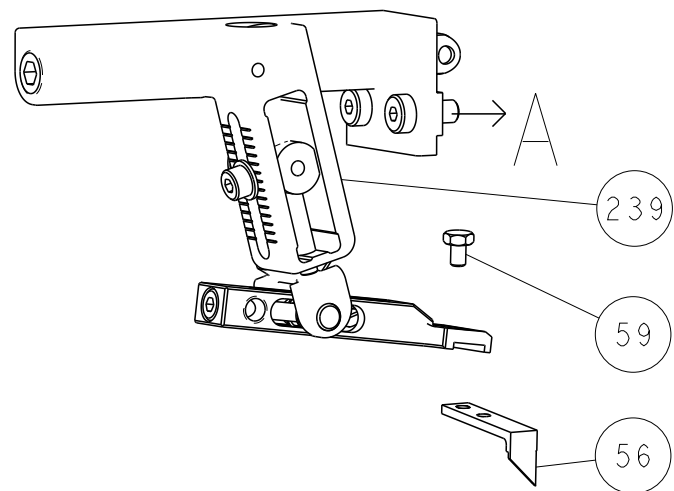

PNEUMATIC

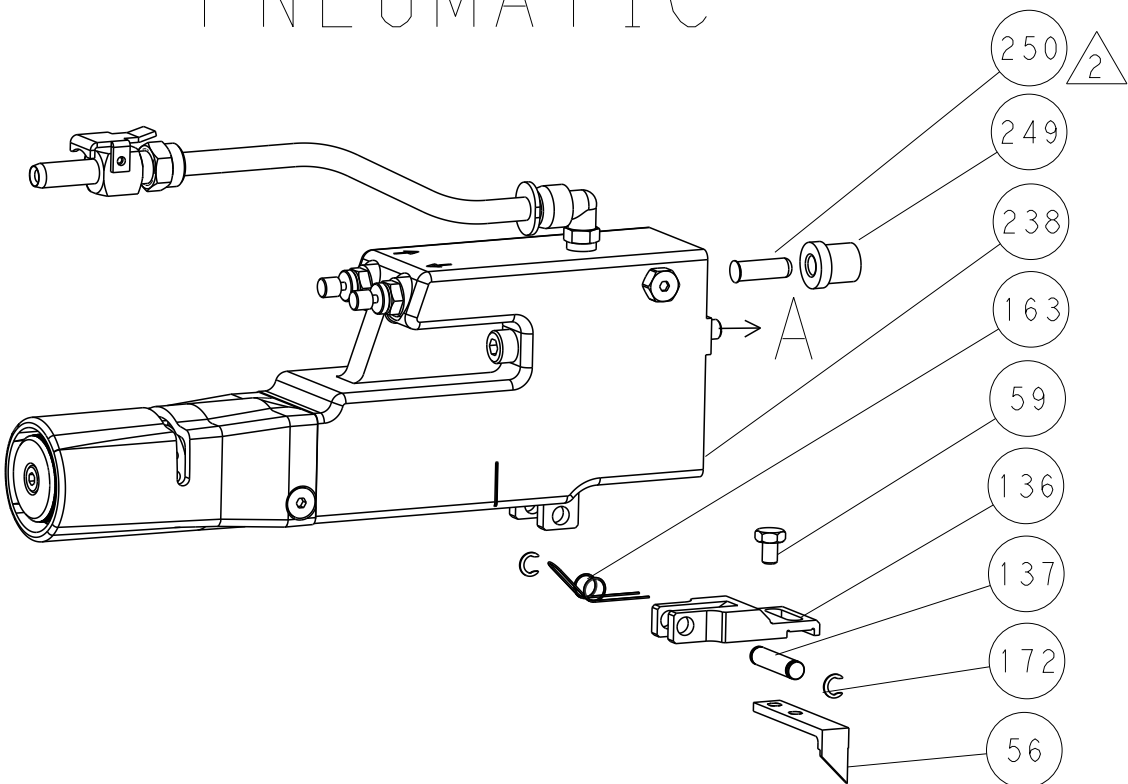

CAM POSITIONS

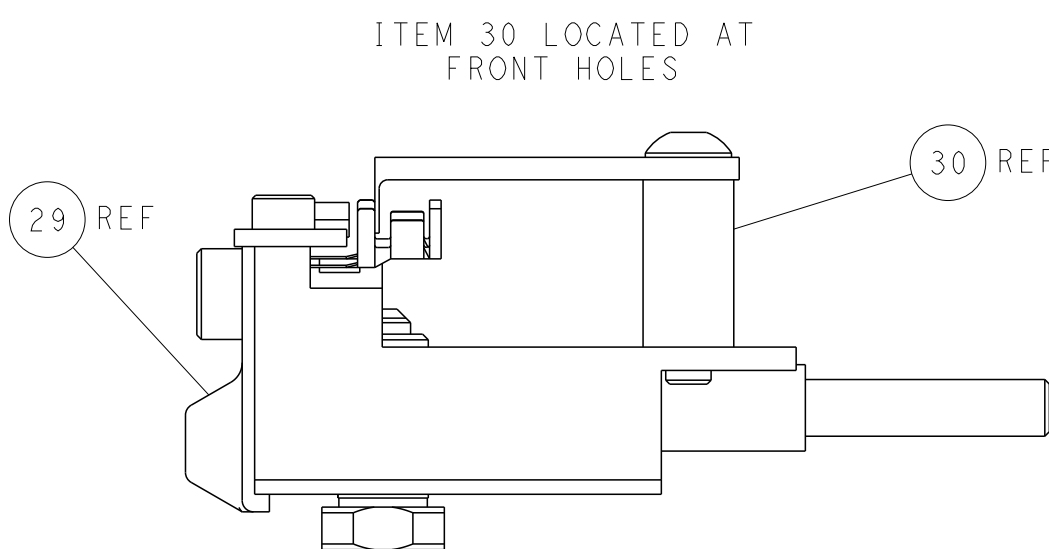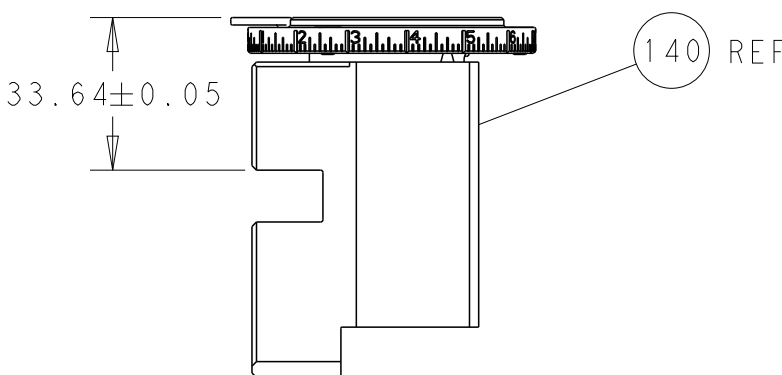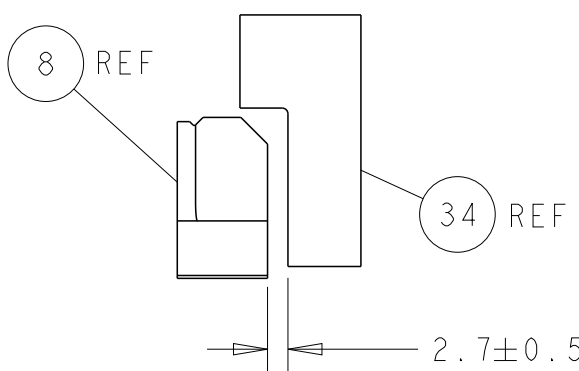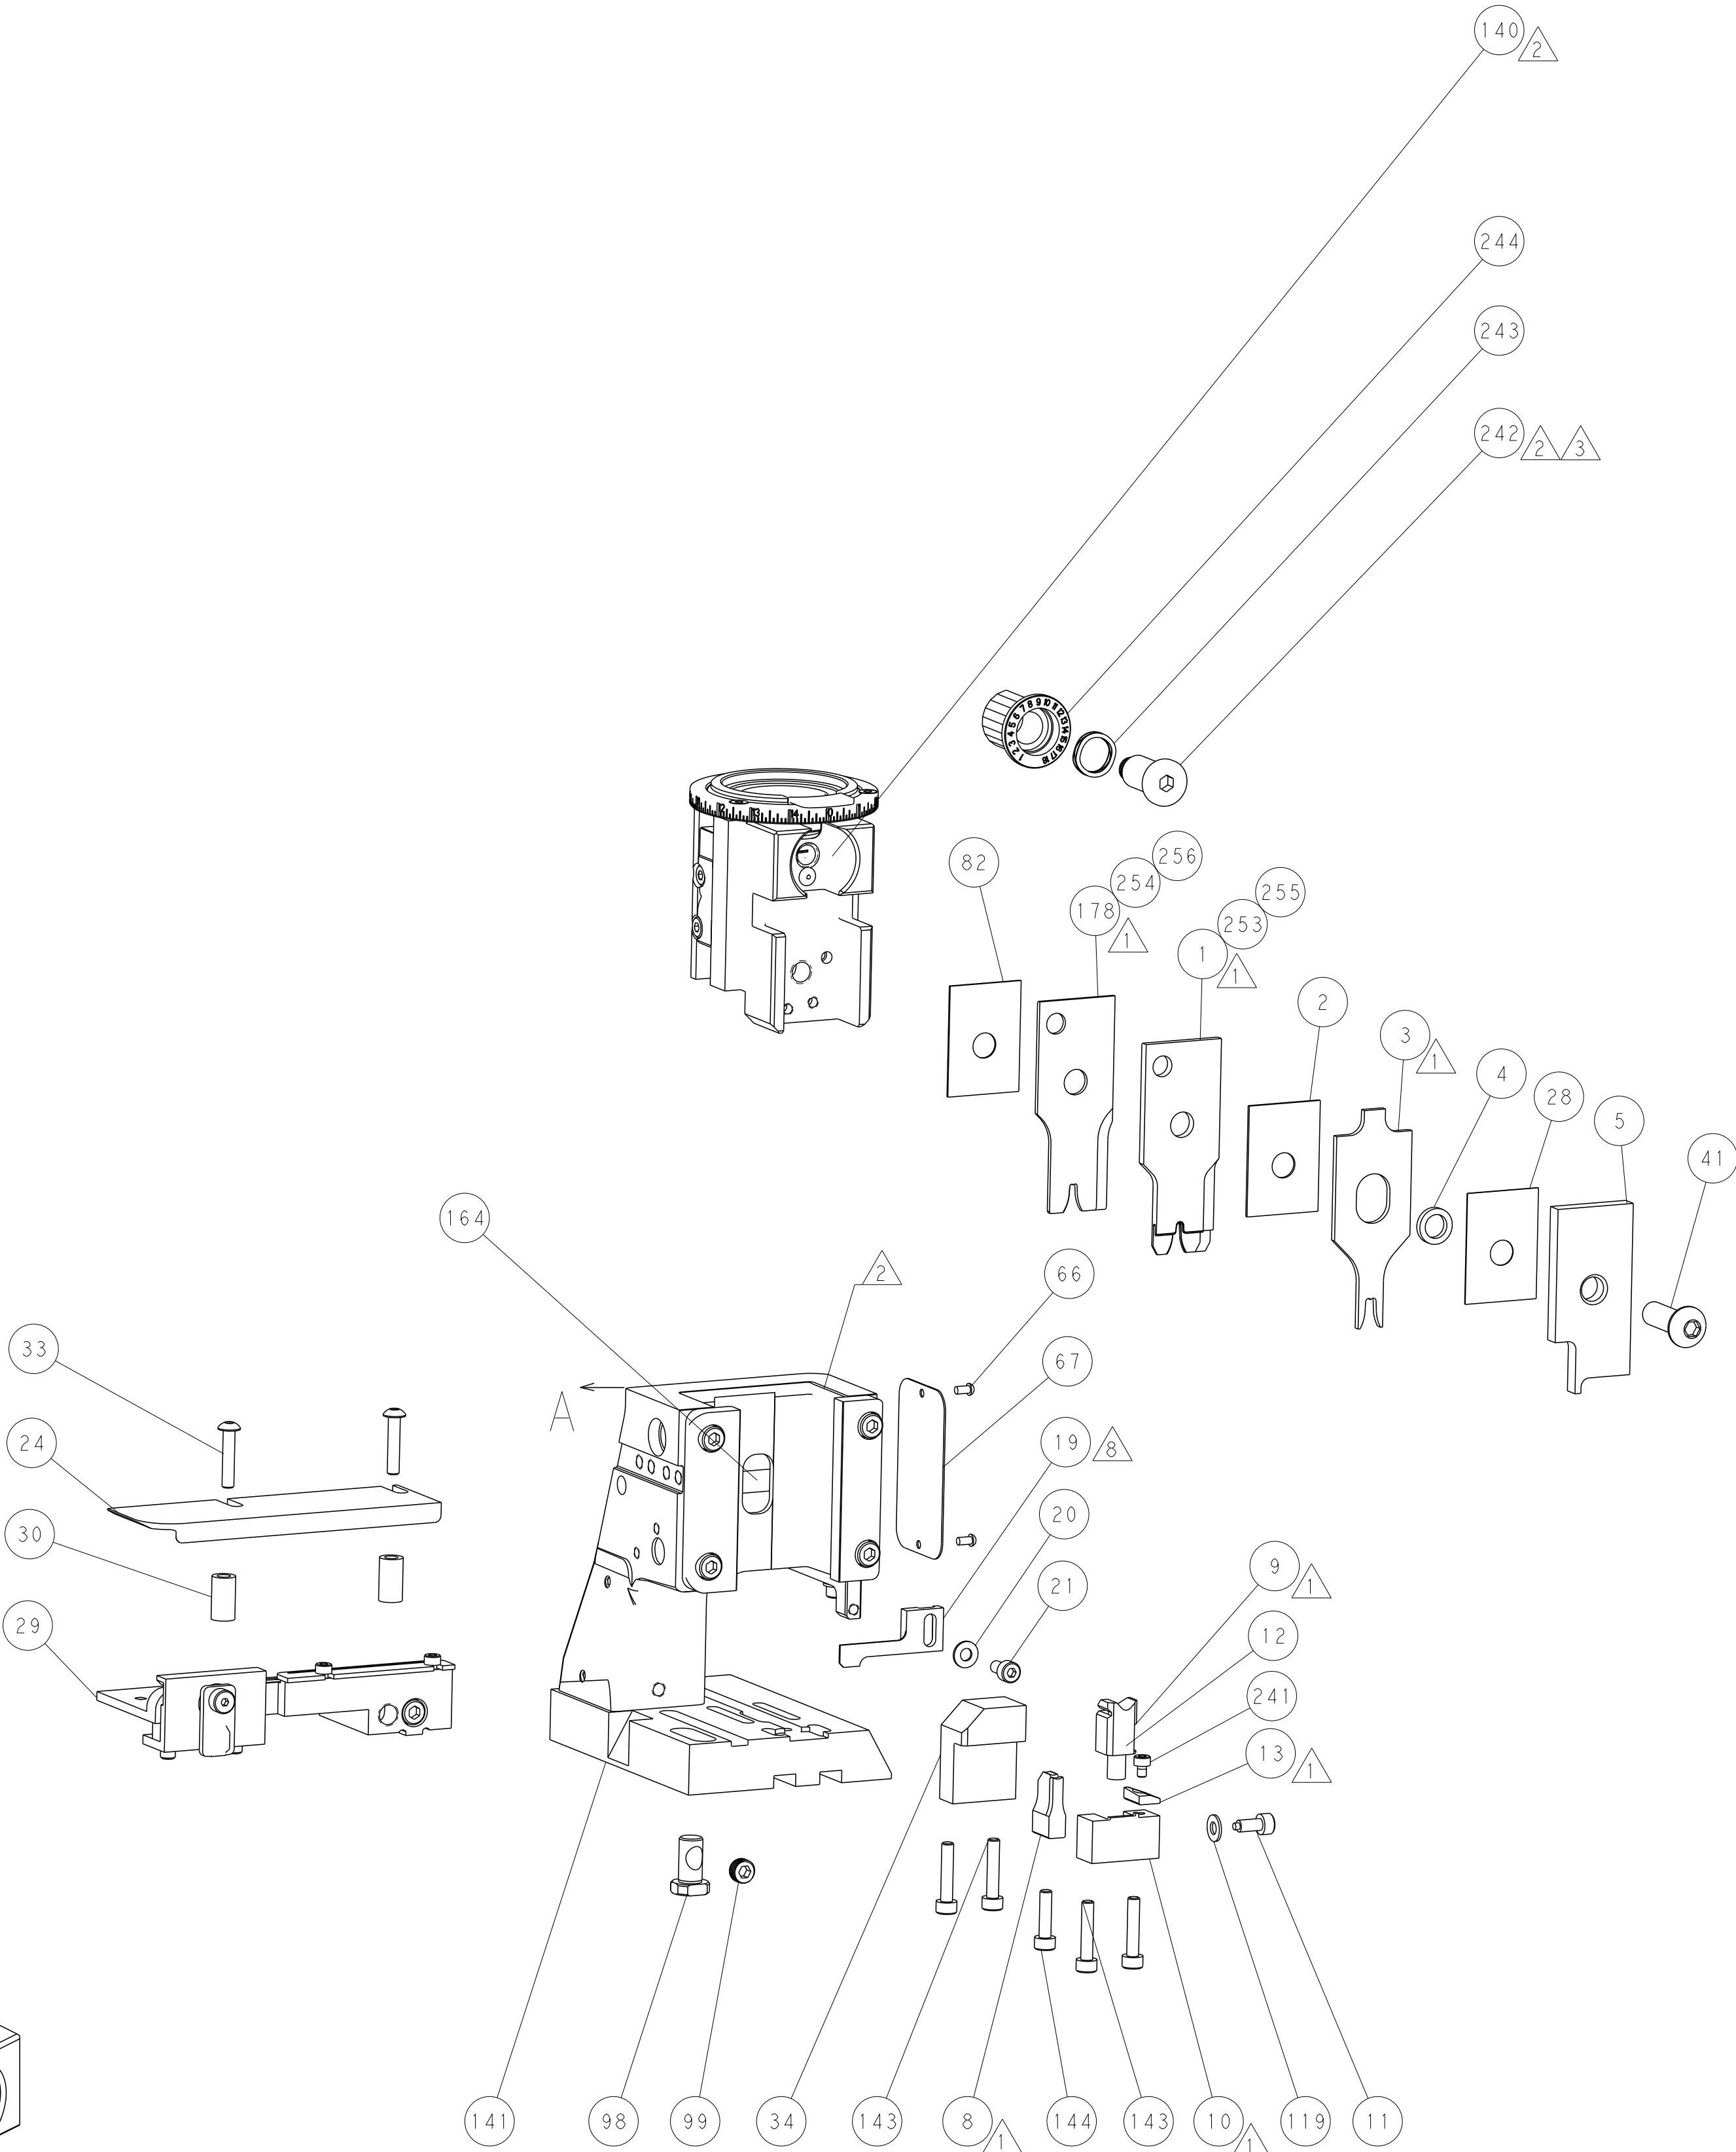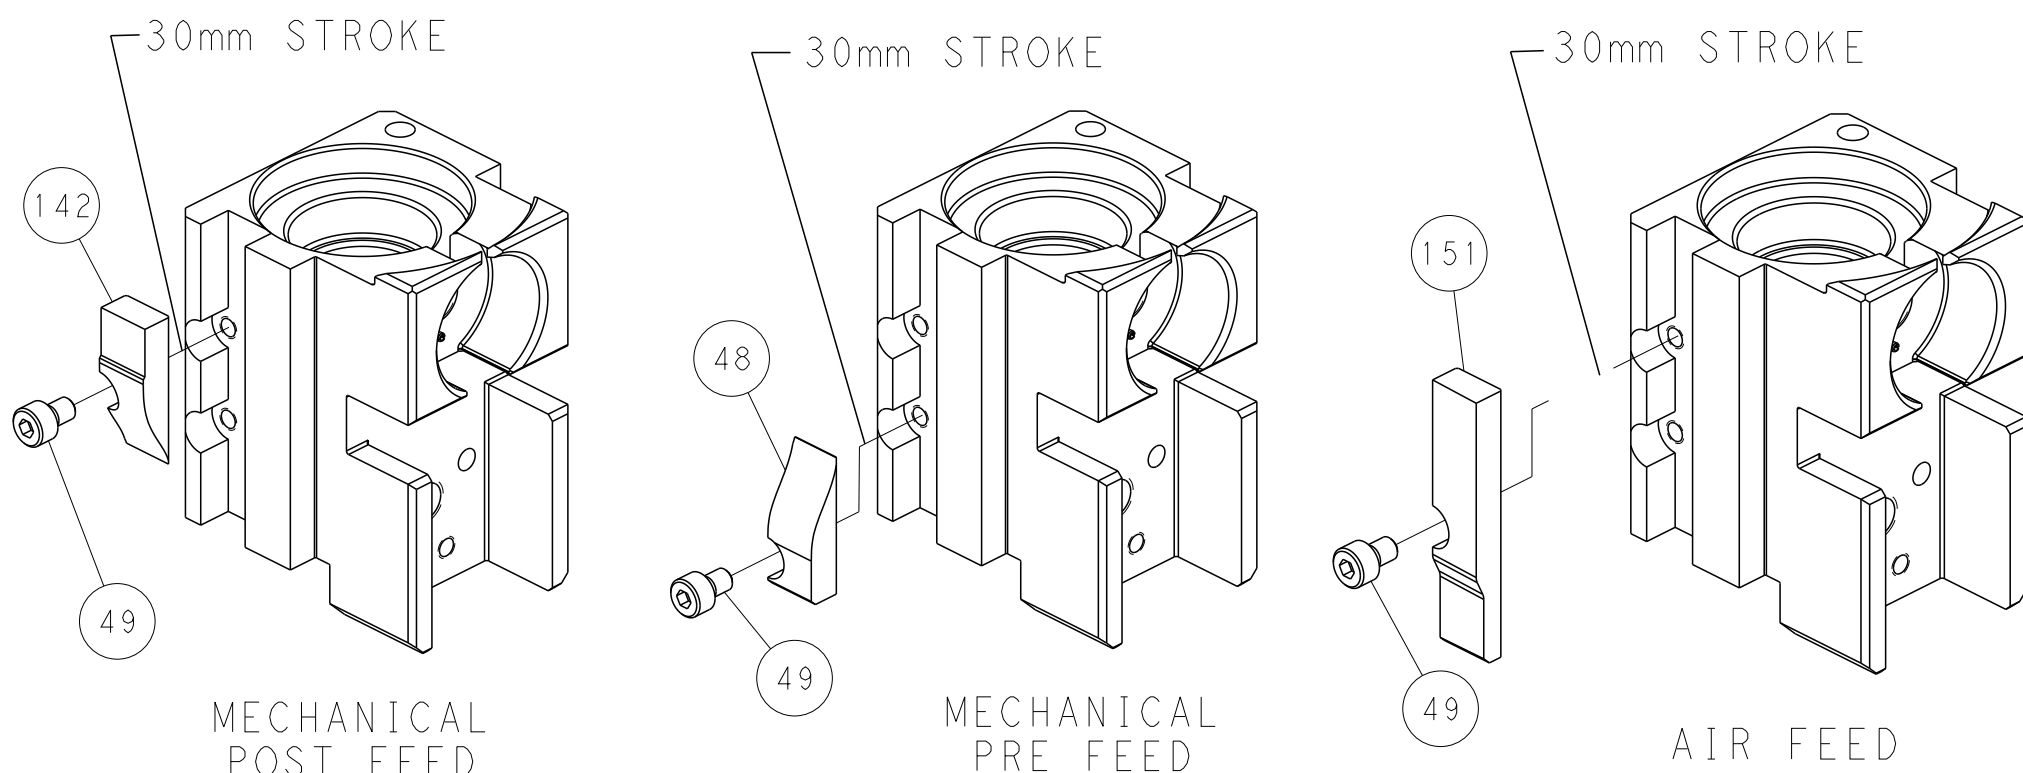

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE USER SHALL BE RESPONSIBLE FOR THE LATEST VERSION.		DWN: 31JAN2013		TE Connectivity	
L. GROSS		31JAN2013		Harrisburg, PA 17105-3608	
CHK: T. ELBIN		31JAN2013		NAME	
APVD: M. CLIFFORD		31JAN2013		Ocean Side Feed	
PRODUCT SPEC		APPLICATION SPEC		-	
SIZE		CAGE CODE		DRAWING NO	
A1		00779		2151314	
Customer Accessible Production Drawing		SCALE		SHEET 4 OF 4	
1:2		REV		D1	