

■ Features

- Power Rating: 72W
- Input Voltage: 120-277Vac \pm 10%
- Constant current design
- Fixed output current(290mA-900mA)
- Efficiency to 83%
- Dimming: 0-10V
- UL Class 2, Type TL, Type HL
- OVP, OCP, SCP, and OTP
- IP20
- 5-year warranty
- Metal case



*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Indoor or outdoor lights

■ Model List*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Certification
LXWCD072Q029SS-20	120~277Vac \pm 10%	18Wx4	27-54V	290mA	290mA	82% @120V 83% @240V 83% @277V	UL/-
LXWCD072Q030SS-20	120~277Vac \pm 10%	18Wx4	26-52V	300mA	300mA	82% @120V 83% @240V 83% @277V	UL/-
LXWCD072Q040SS-20	120~277Vac \pm 10%	18Wx4	23-45V	400mA	400mA	82% @120V 83% @240V 83% @277V	UL/-
LXWCD072Q050SS-20	120~277Vac \pm 10%	18Wx4	18-36V	500mA	500mA	82% @120V 83% @240V 83% @277V	UL/cUL
LXWCD072Q060SS-20	120~277Vac \pm 10%	18Wx4	15-30V	600mA	600mA	82% @120V 83% @240V 83% @277V	UL/cUL
LXWCD072Q070SS-20	120~277Vac \pm 10%	18Wx4	13-26V	700mA	700mA	82% @120V 83% @240V 83% @277V	UL/cUL
LXWCD072Q075SS-20	120~277Vac \pm 10%	18Wx4	12-24V	750mA	750mA	82% @120V 83% @240V 83% @277V	UL/cUL
LXWCD072Q080SS-20	120~277Vac \pm 10%	18Wx4	12-23V	800mA	800mA	82% @120V 83% @240V 83% @277V	UL/cUL
LXWCD072Q090SS-20	120~277Vac \pm 10%	18Wx4	12-20V	900mA	900mA	82% @120V 83% @240V 83% @277V	UL/cUL


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 13, 2019

1 / 6

■ Wiring Diagram

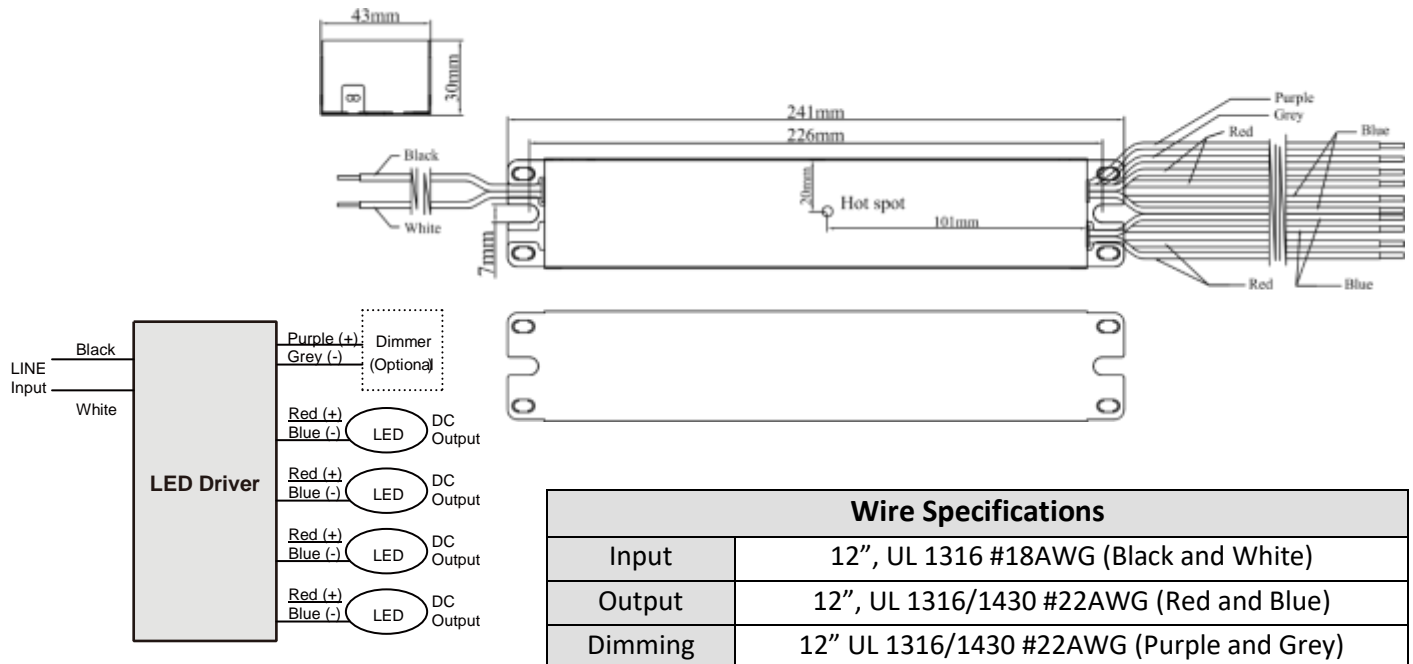

■ Technical Data

Input voltage range	120~277Vac \pm 10%
Frequency	50/60Hz
Power factor	> 0.9 under 120~277Vac input with 80~100% load condition (for all output currents)
Inrush current	20A @ 230V
Max input current	0.80A @120V, 0.40A @240V, 0.35A @277V
THD	< 20% under 120~277Vac input with 80~100% load condition (for all output currents)
Load Regulation	\pm 2%
Line Regulation	\pm 1%
Current Tolerance	\pm 5% at full load condition
Turn-on Delay Time	< 2s at full load condition
Overshoot	< 10% at full load condition
No Load Power Consumption	<1.5W
Ripple & Noise (pk-pk)	<3%
Withstand voltage	Input to output, 2,800Vdc, 2mA
Leakage current	Maximum 0.5mA at 277Vac, 60Hz input

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 13, 2019

2 / 6

■ Technical Data(cont.)

Protection	Over voltage protection: Hiccup mode. Protection will trigger when load voltage exceeds specified output voltage and will auto recover after the fault mode is removed. Over current protection: Hiccup mode. Protection will trigger when load current exceeds specified output current and will auto recover after the fault mode is removed. Short circuit protection: Hiccup mode. Protection will trigger when short circuit and will auto recover after the fault mode is removed. Over temperature protection: Protection will trigger when driver overheat and auto-recovery when cooled down.
Operating temperature	-40 to 60°C
Storage temperature	-40 to 85°C
Humidity	5% to 95%
MTBF	225,000 hours at 40°C ambient (~70°C case temp)
Life rating	80,000 hours at 120Vac input, 100% load and 60°C case temp
Maximum case Temperature	70°C
Length (L)	9.50" (241mm)
Width (W)	1.70" (43mm)
Height (H)	1.15" (30mm)
Mounting (M)	8.90" (226mm)
Packing	0.6kg/unit; 30pcs/carton; 1,200pcs/pallet

■ Safety Compliance

UL/cUL	UL 8750, Type TL, Type HL
CE	EN61347-1, EN61347-2-13
FCC, 47CFR Part 15	ANSI C63.4:2009 Class A (Non-Consumer Limit)
EN61000-3-2	Harmonic Current Emissions Class C

Disclaimer:

Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com


June 13, 2019

3 / 6

■ Lifetime vs Case Temperature

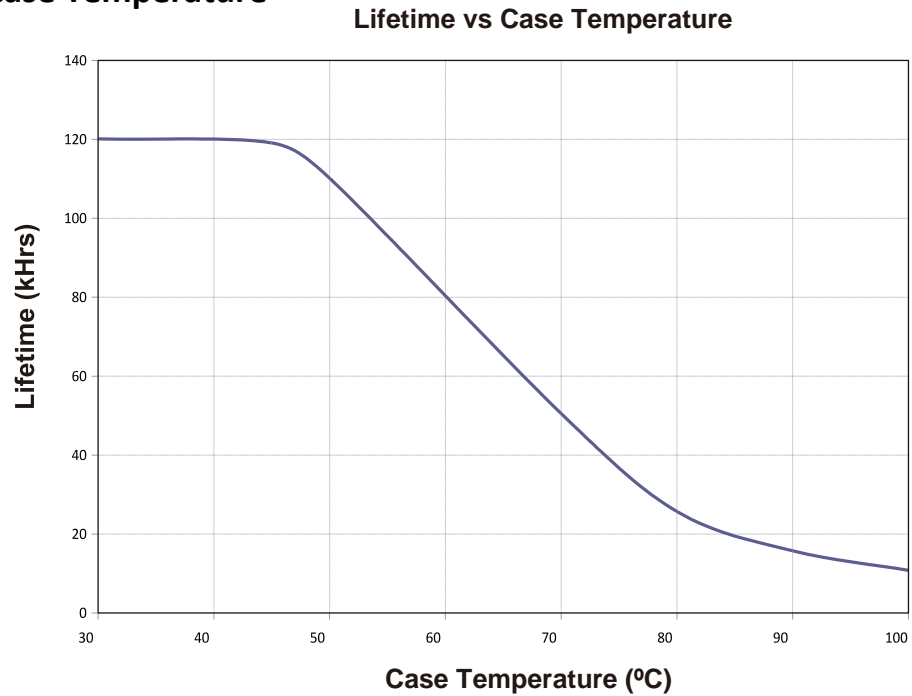

■ Power Derating vs Case Temperature

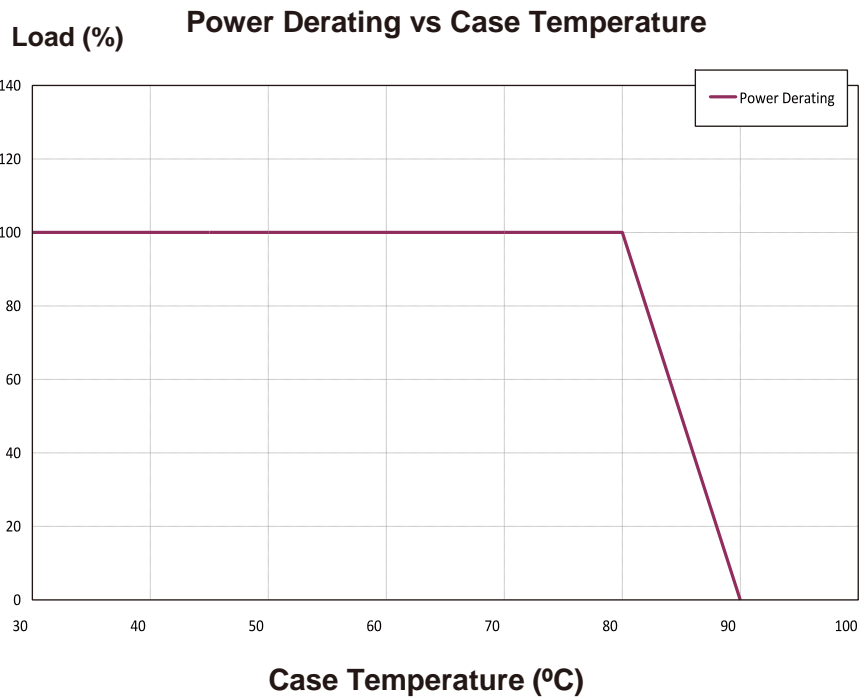


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com


June 13, 2019

4 / 6

■ **Power Factor vs Load**

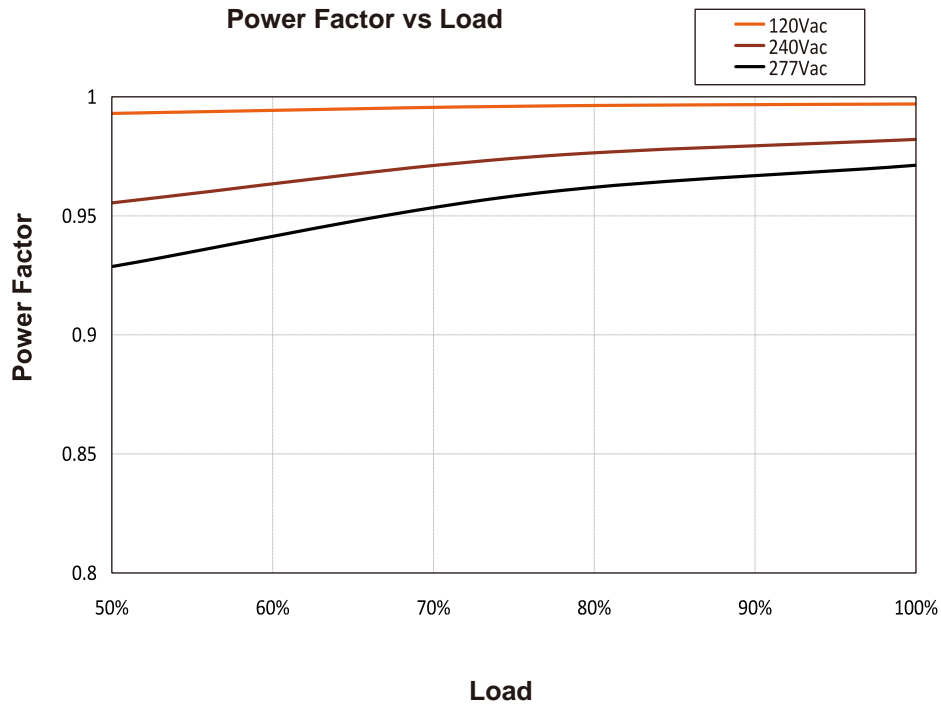

■ **Efficiency vs Load**

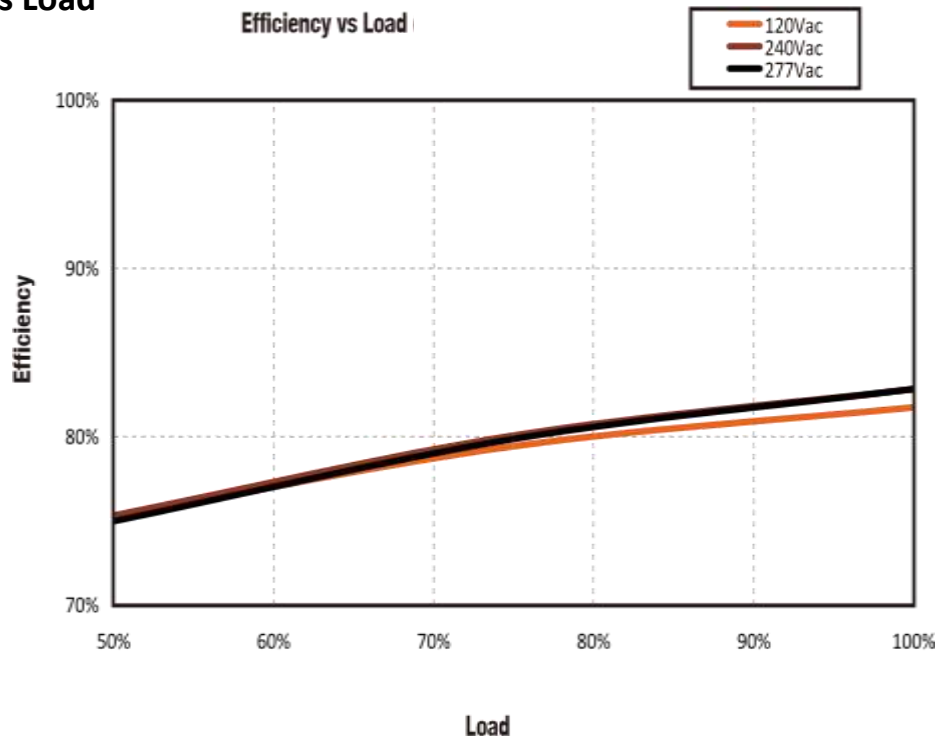


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 13, 2019

5 / 6

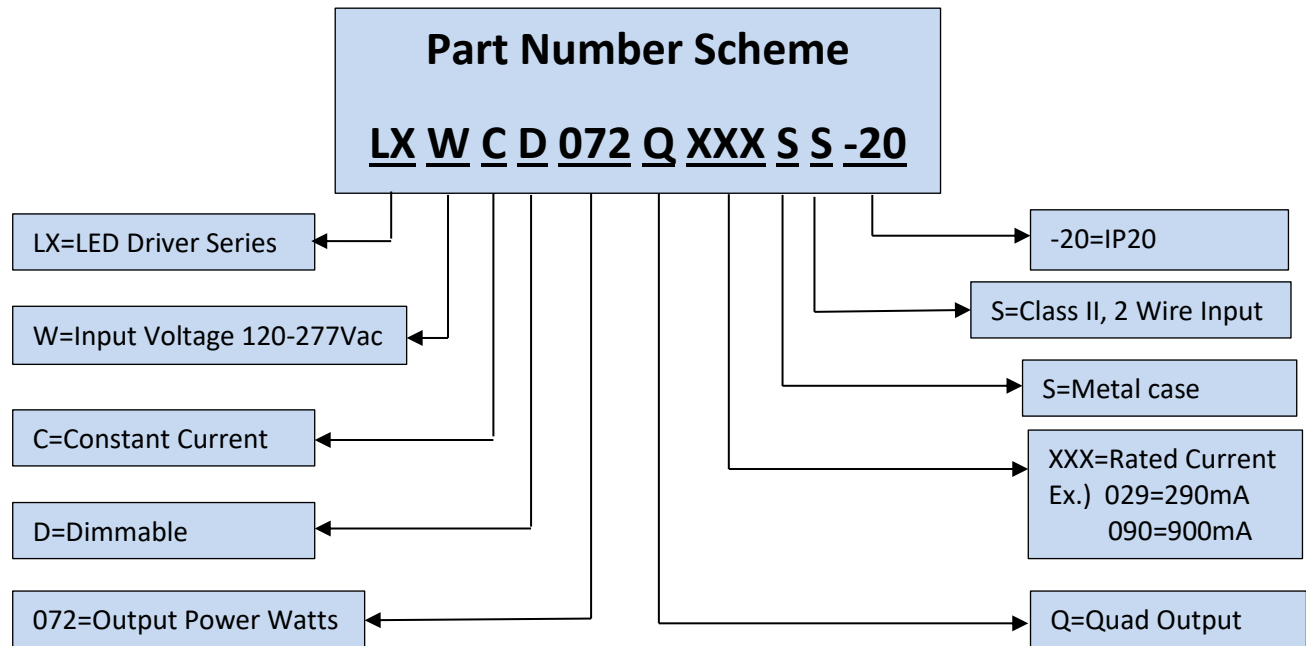

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 13, 2019

6 / 6