

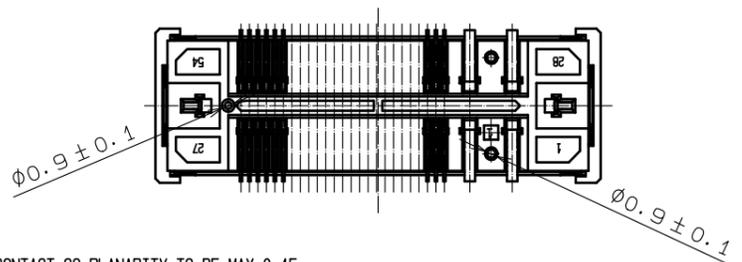
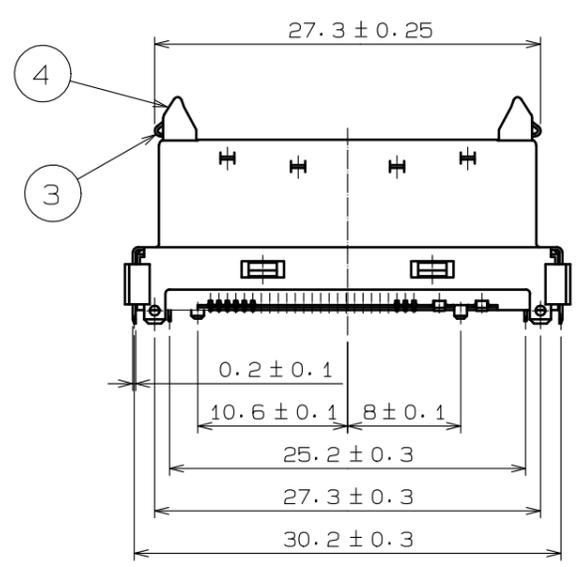




Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

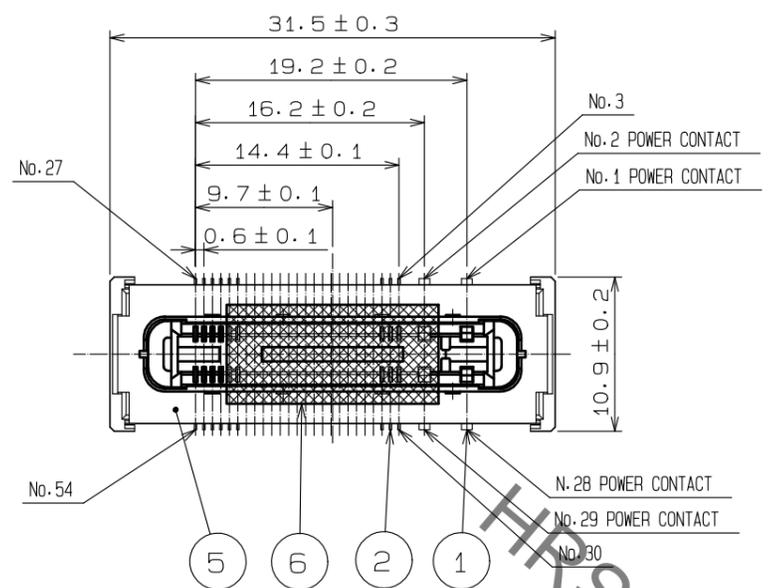

- NOTE 1 CONTACT CO-PLANARITY TO BE MAX 0.15.
 2 TOLERANCES TO BE ± 0.1 UNLESS OTHERWISE SPECIFIED.
 3 POWER CONTACT No. 1, 2, 28, 29 TO BE 0.3 mm LONGER SEGMENTAL STRUCTURE THAN OTHER SIGNAL CONTACTS.
 4 DEVICE DESIGN SHALL CONSIDER THE STACKED HEIGHT TO BE 14.5mm MAX. (RECOMMENDED STACKED HEIGHT IS 13.7mm MAX.)
 5 APPLY FLOATING STRUCTURE (WITHIN 0.7mm) TO DEVICES FOR THE ATTACHMENT OF THIS PRODUCT.
 6 MATING GUIDE IS REQUIRED ON THE DEVICE.
 7 100mm MIN. OF TURNING-RADIUS IS REQUIRED FOR THE ROTATE-AND-MATE PC BODY TO DOCKING STATION.

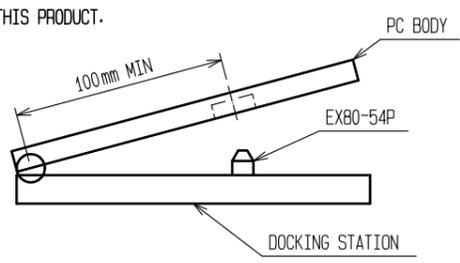

RECOMMENDED PC BOARD PATTERN (AUTOMATIC MOUNTING)
 (COMPONENT MOUNTING SIDE : PCB t=1 MIN)

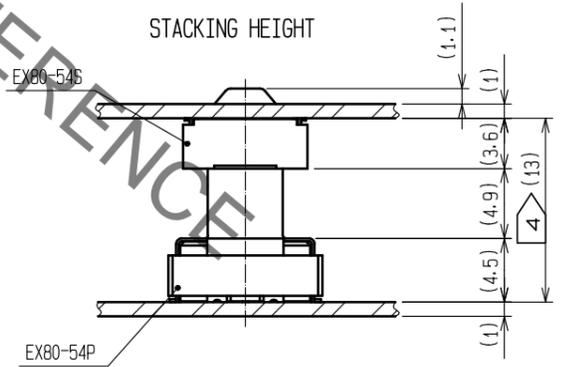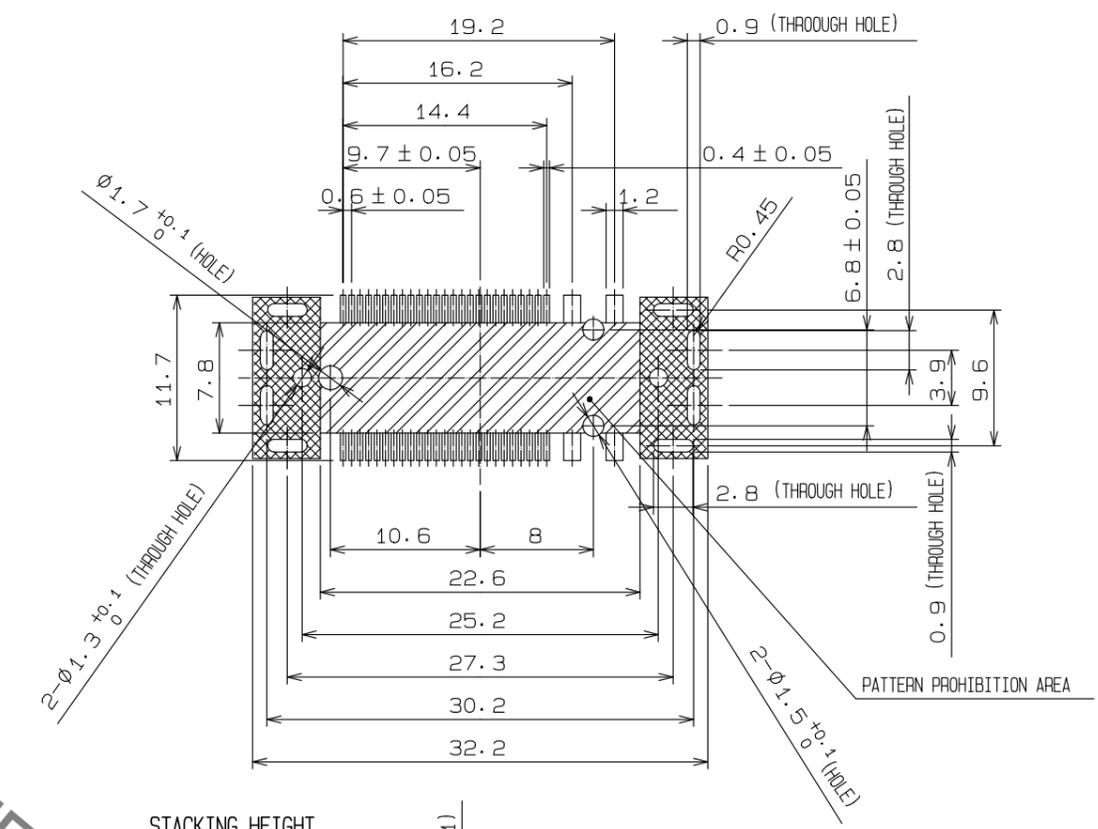


NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
3	PHOSPHOR BRONZE	SELECTIVE NICKEL PLATING+ TIN-COPPER PLATING	7	PS	
2	COPPER ALLOY	SELECTIVE GOLD PLATING+ TIN-COPPER PLATING	6	PICK & PLACE TAPE	
1	COPPER ALLOY	SELECTIVE GOLD PLATING+ TIN-COPPER PLATING	5	STAINLESS STEEL	NICKEL PLATING+ TIN-COPPER PLATING
			4	LCP	UL94V-0. BLACK

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△	APPROVED : NM. NISHIMATSU 15.10.27			
			CHECKED : KN. ICHIKAWA 15.10.27			
			DESIGNED : TS. ITO 15.10.27			
			DRAWN : AK. AKIYAMA 15.10.27			

DRAWING NO.	PART NO.	CODE NO.
EDC-124545-30-00	EX80-54P(30)	CL232-0610-2-30

Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

EX80-54P(01) PACKAGING FIGURE

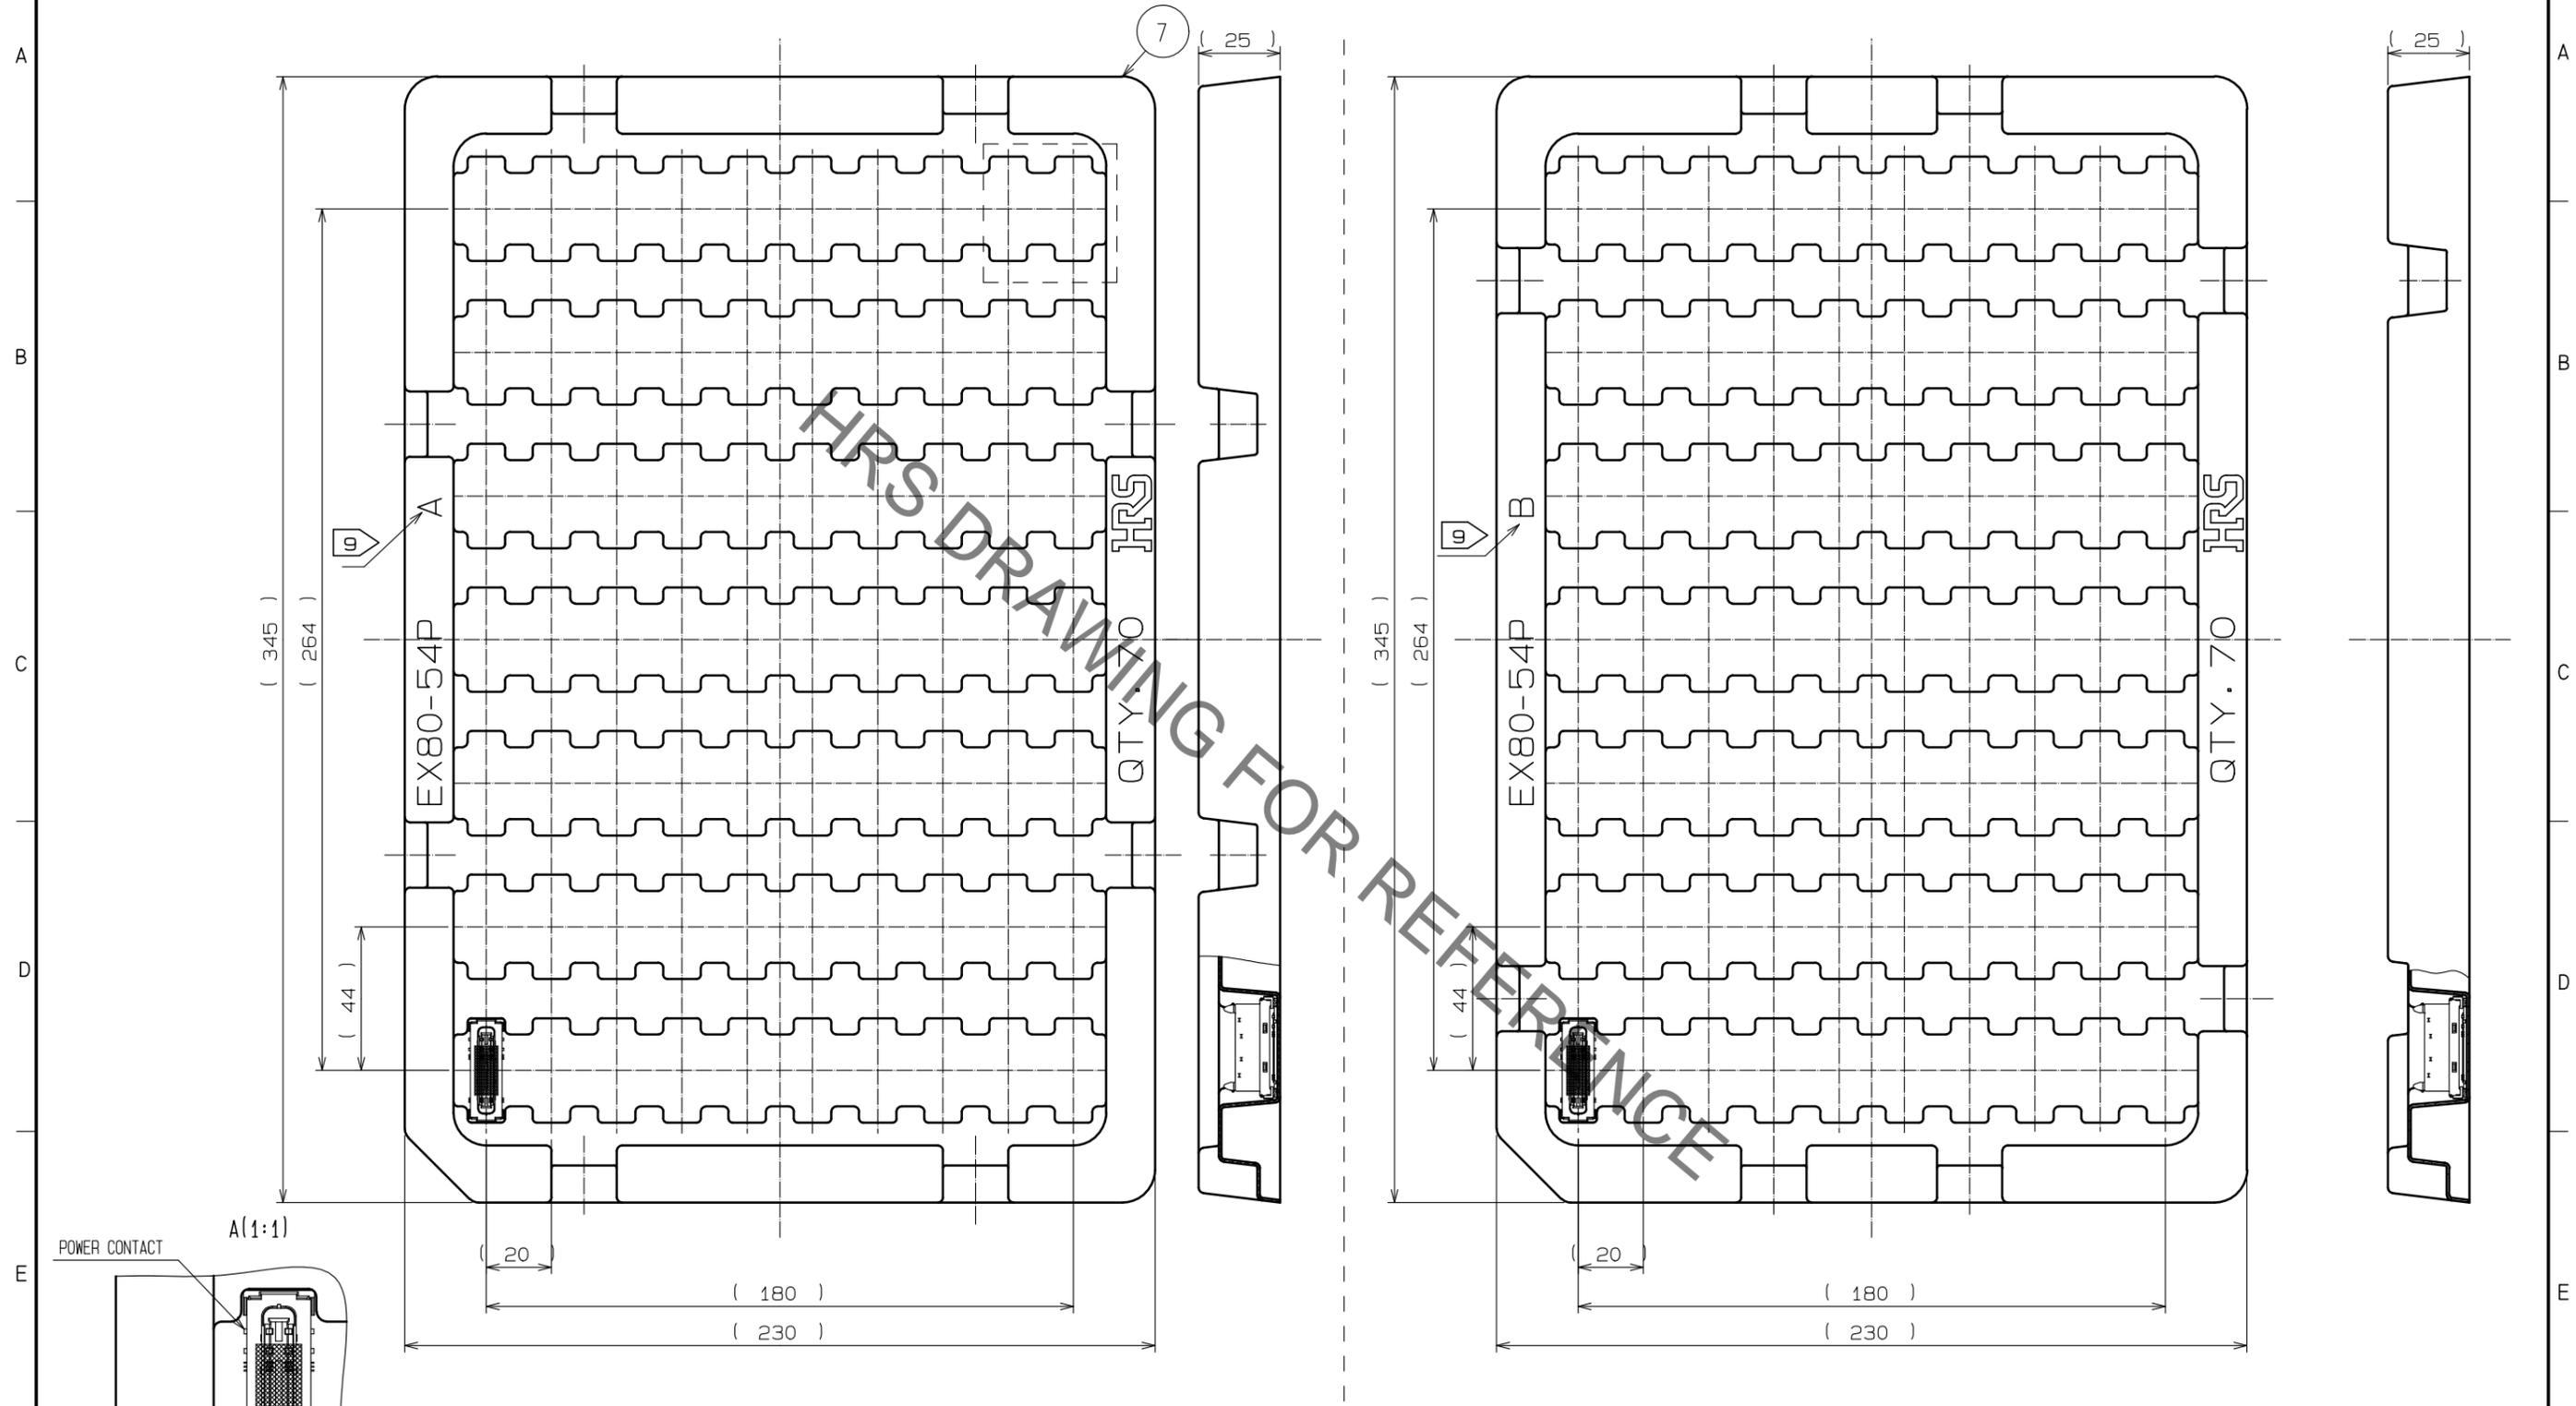

NOTE 8 QUANTITY PER TRAY TO BE 70 PCS MAX.
 9 ORDERING VOLUME TO BE MADE BY QUANTITY OF CONNECTOR.
 A TYPE AND B TYPE TRAY PILED UP ONE AFTER ANOTHER.

HRS	DRAWING NO.	EDC-124545-30-00	2/2
	PART NO.	EX80-54P(30)	
	CODE NO.	CL232-0610-2-30	