


## STRADA-SQ-FS3

Forward throw beam optimized for European tunnels, resulting in extremely efficient lighting with counter-beam method. Version with location pins. Assembly with installation tape.

### TECHNICAL SPECIFICATIONS:

Dimensions	25.0 mm
Height	16.2 mm
Fastening	tape
ROHS compliant	yes 


### MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
STRADA-SQ-FS3	Single lens	PMMA	clear	
ROSE-TAPE	Tape	PU tape	black	

### ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CA15226_STRADA-SQ-FS3	Single lens	1470	294	98	7.4
» Box size: 480 x 280 x 300 mm					




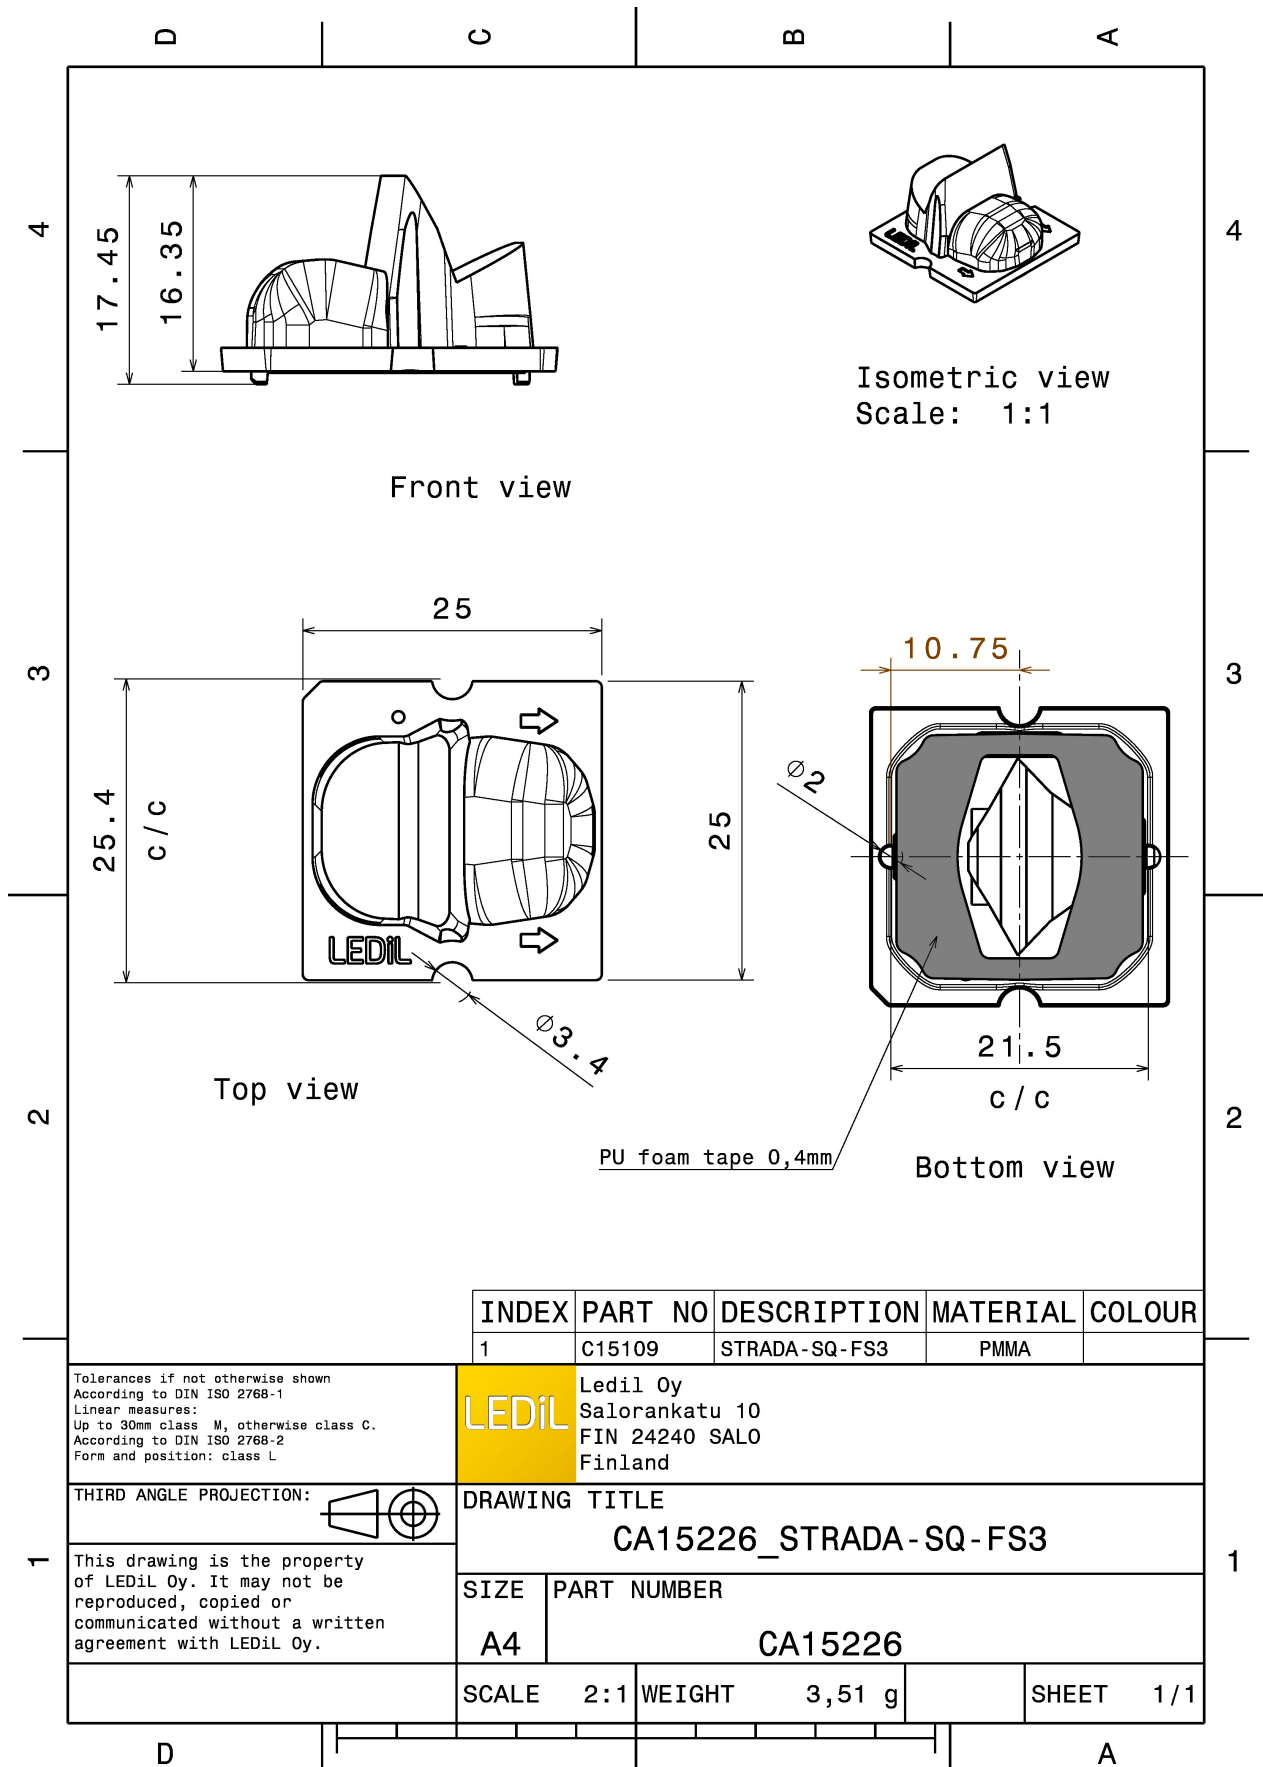


#### PHOTOMETRIC DATA (MEASURED):




LED MK-R  
 FWHM 125.0°  
 Efficiency 88 %  
 Peak intensity 1.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

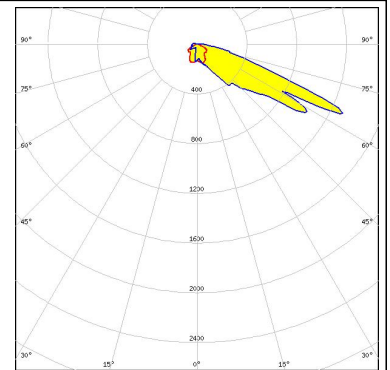


LED LUXEON M/MX  
 FWHM Asymmetric  
 Efficiency 90 %  
 Peak intensity 1.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

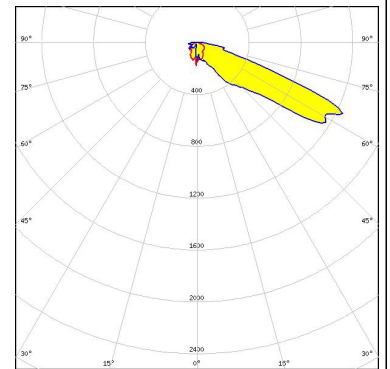

LED LUXEON MZ  
 FWHM Asymmetric  
 Efficiency 91 %  
 Peak intensity 2.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:




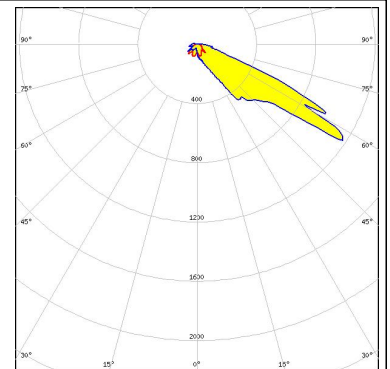


LED NV4x144A  
 FWHM Asymmetric  
 Efficiency 78 %  
 Peak intensity 1.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

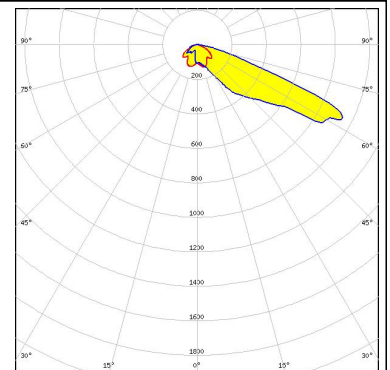

Transparent protective cover


#### PHOTOMETRIC DATA (MEASURED):
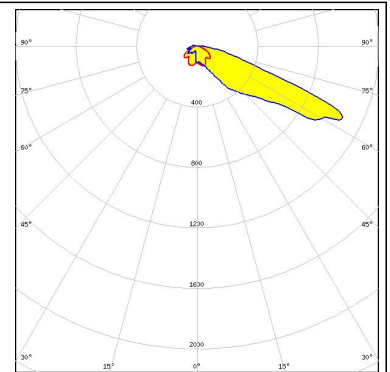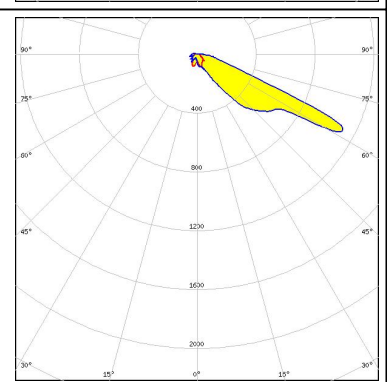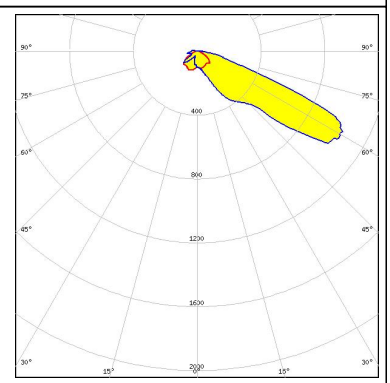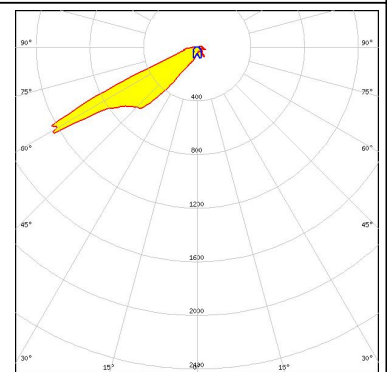
<p><b>NICHIA</b></p> <p>LED NV4x144A FWHM Asymmetric Efficiency 91 % Peak intensity 1.3 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p><b>NICHIA</b></p> <p>LED NVSW319B FWHM Asymmetric Efficiency 90 % Peak intensity 2.4 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED Duris S10 FWHM Asymmetric Efficiency 86 % Peak intensity 1.1 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED OSLOM Square PC FWHM Asymmetric Efficiency 91 % Peak intensity 3.1 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	


#### PHOTOMETRIC DATA (SIMULATED):



LED XHP50.2  
 FWHM Asymmetric  
 Efficiency 90 %  
 Peak intensity 1.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

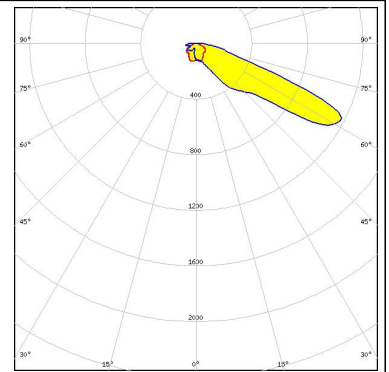


LED XHP50.2  
 FWHM Asymmetric  
 Efficiency 80 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

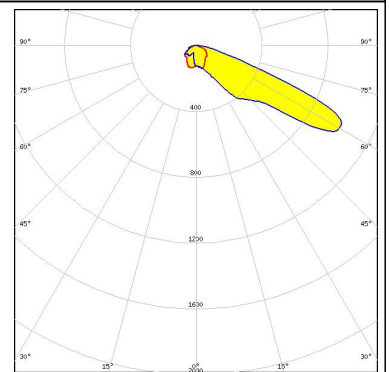

Transparent protective cover




LED XHP70  
 FWHM Asymmetric  
 Efficiency 77 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

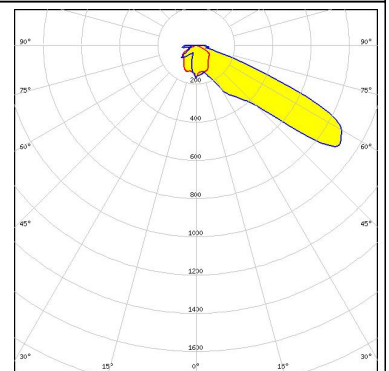

Transparent protective cover




LED XM-L2  
 FWHM Asymmetric  
 Efficiency 88 %  
 Peak intensity 2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

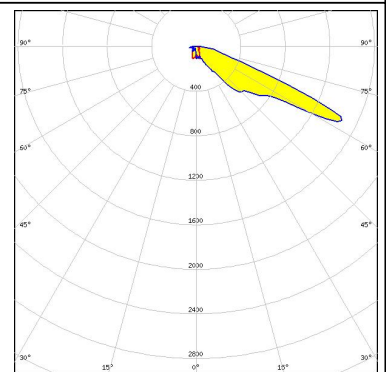


#### PHOTOMETRIC DATA (SIMULATED):




LED XP-G3  
 FWHM Asymmetric  
 Efficiency 90 %  
 Peak intensity 1.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

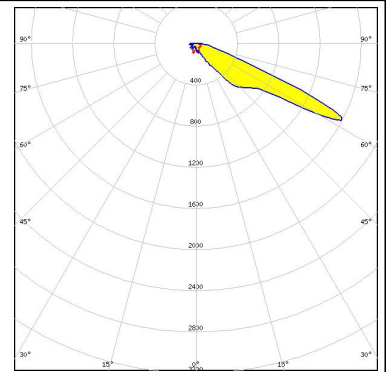


LED XP-G3  
 FWHM Asymmetric  
 Efficiency 86 %  
 Peak intensity 1.8 cd/lm  
 LEDs/each optic 1  
 Light colour Red  
 Required components:

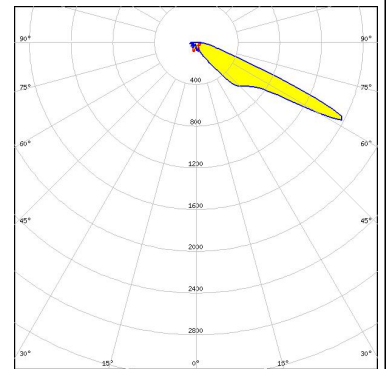

LED XT-E  
 FWHM Asymmetric  
 Efficiency 87 %  
 Peak intensity 2.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

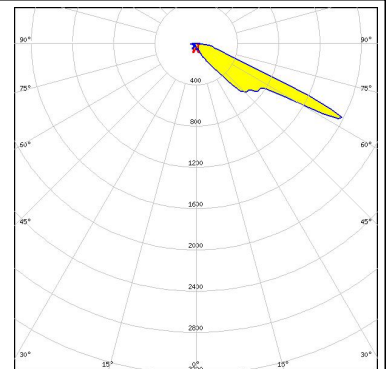





LED LUXEON 5050 Round LES  
 FWHM Asymmetric  
 Efficiency 88 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

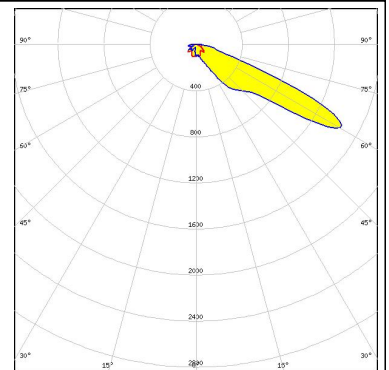

#### PHOTOMETRIC DATA (SIMULATED):

<p><b>LUMILEDS</b></p> <p>LED: LUXEON M/MX            FWHM: Asymmetric            Efficiency: 73 %            Peak intensity: 1.1 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>LUMILEDS</b></p> <p>LED: LUXEON M/MX            FWHM: Asymmetric            Efficiency: 76 %            Peak intensity: 1 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p> <p>Transparent protective cover</p>	
<p><b>NICHIA</b></p> <p>LED: NVSxE21A            FWHM: Asymmetric            Efficiency: 89 %            Peak intensity: 2.1 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>NICHIA</b></p> <p>LED: NVSxx19B/NVSxx19C            FWHM: Asymmetric            Efficiency: 90 %            Peak intensity: 2.2 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	

#### PHOTOMETRIC DATA (SIMULATED):

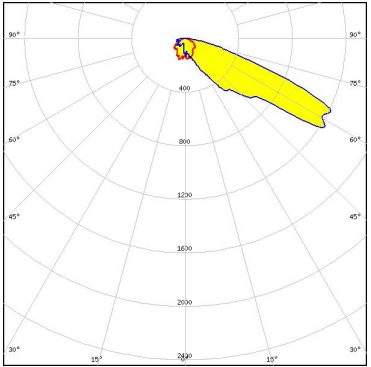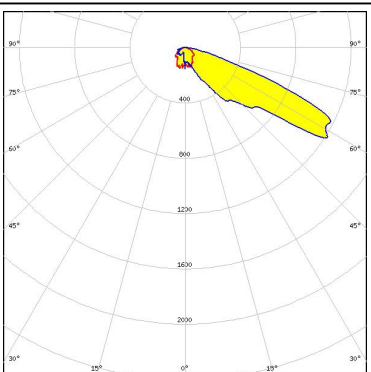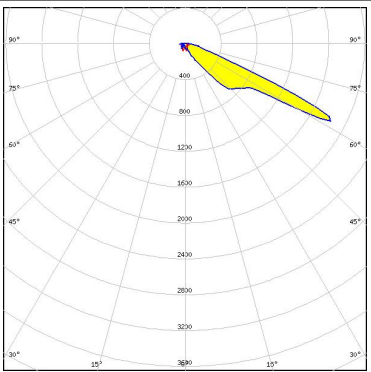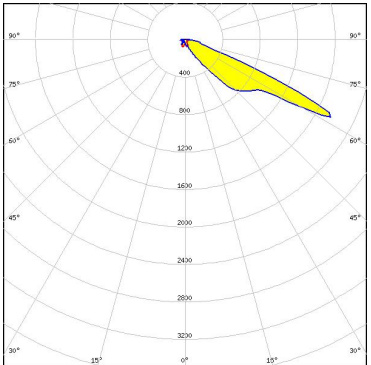
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED: OSCONIQ P 7070            FWHM: Asymmetric            Efficiency: 94 %            Peak intensity: 1.4 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED: OSCONIQ P 7070            FWHM: Asymmetric            Efficiency: 85 %            Peak intensity: 1.4 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p> <p>Transparent protective cover</p>	
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED: OSLOM Square CSSRM2/CSSRM3            FWHM: Asymmetric            Efficiency: 90 %            Peak intensity: 2.2 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED: OSLOM Square EC            FWHM: Asymmetric            Efficiency: 89 %            Peak intensity: 2.1 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	



#### PHOTOMETRIC DATA (SIMULATED):


**OSRAM**  
Opto Semiconductors

LED SFH 4715AS  
FWHM Asymmetric  
Efficiency 87 %  
LEDs/each optic 1  
Light colour IR  
Required components:

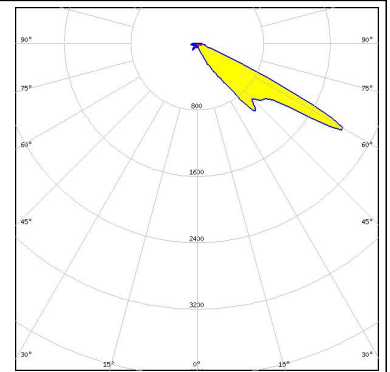


**OSRAM**  
Opto Semiconductors

LED SFH 4716AS  
FWHM Asymmetric  
Efficiency 87 %  
LEDs/each optic 1  
Light colour IR  
Required components:

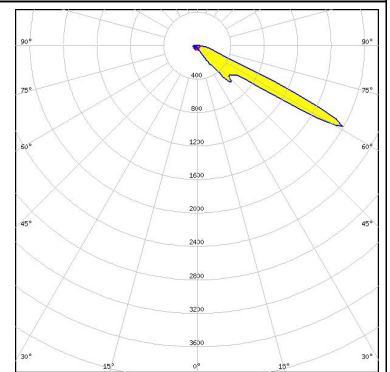


**SAMSUNG**

LED LH181B  
FWHM Asymmetric  
Efficiency 87 %  
Peak intensity 1.2 cd/lm  
LEDs/each optic 4  
Light colour White  
Required components:

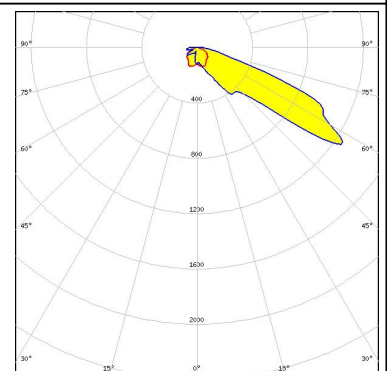

**SAMSUNG**

LED LH351B  
FWHM Asymmetric  
Efficiency 86 %  
Peak intensity 1.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

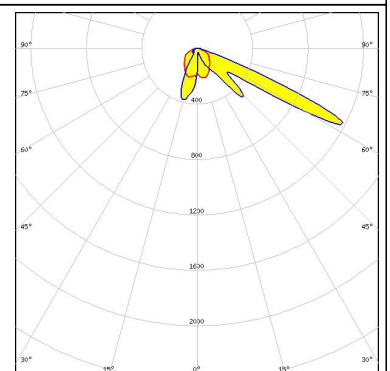

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)