

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [71660-7130](#)
Status: **Active**
Overview: [EBBI™ 50D](#)
Description: 1.27mm Pitch EBBI™ 50D Receptacle, Vertical, Blind-Mate, 130 Circuits

Documents:

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family PCB Receptacles
Series [71660](#)
Application Board-to-Board, Signal
Overview [EBBI™ 50D](#)
Product Name EBBI™
UPC 800753785182

Physical

Circuits (Loaded) 130
Circuits (maximum) 130
Color - Resin Black
Durability (mating cycles max) 2,000
Flammability 94V-0
Glow-Wire Compliant No
Material - Metal Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 7.750/g
Number of Rows 2
Orientation Vertical
PC Tail Length 2.79mm
PCB Locator Yes
PCB Retention Yes
PCB Thickness - Recommended 2.79mm
Packaging Type Tray
Pitch - Mating Interface 1.27mm
Plating min - Mating 0.762µm
Plating min - Termination 0.254µm
Polarized to PCB Yes
Temperature Range - Operating -40°C to +105°C
Termination Interface: Style Through Hole


Electrical

Current - Maximum per Contact 1A
Voltage - Maximum 30V

Solder Process Data

Lead-free Process Capability SMC & Wave Capable (TH only)
Process Temperature max. C 260

Material Info

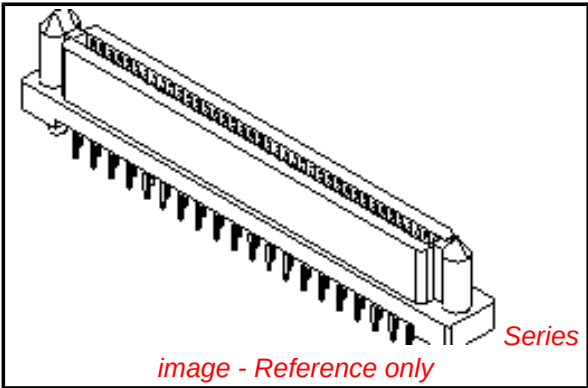

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Low-Halogen Status
Low-Halogen



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[71660Series](#)

Mates With
[716617xxx](#) , [7166125xx](#)

Reference - Drawing Numbers

Sales Drawing

SDA-71660-7***

This document was generated on 10/11/2012

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION