

## Important notice

Dear Customer,

On 7 February 2017 the former NXP Standard Product business became a new company with the tradename **Nexperia**. Nexperia is an industry leading supplier of Discrete, Logic and PowerMOS semiconductors with its focus on the automotive, industrial, computing, consumer and wearable application markets

In data sheets and application notes which still contain NXP or Philips Semiconductors references, use the references to Nexperia, as shown below.

Instead of <http://www.nxp.com>, <http://www.philips.com/> or <http://www.semiconductors.philips.com/>, use **<http://www.nexperia.com>**

Instead of [sales.addresses@www.nxp.com](mailto:sales.addresses@www.nxp.com) or [sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com), use **[salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)** (email)

Replace the copyright notice at the bottom of each page or elsewhere in the document, depending on the version, as shown below:

- © NXP N.V. (year). All rights reserved or © Koninklijke Philips Electronics N.V. (year). All rights reserved

Should be replaced with:

- © **Nexperia B.V. (year). All rights reserved.**

If you have any questions related to the data sheet, please contact our nearest sales office via e-mail or telephone (details via **[salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)**). Thank you for your cooperation and understanding,

Kind regards,

Team Nexperia

# 74HC1G125; 74HCT1G125

Bus buffer/line driver; 3-state

Rev. 05 — 23 December 2005

Product data sheet

## 1. General description

The 74HC1G125; 74HCT1G125 is a high-speed, Si-gate CMOS device.

The 74HC1G125; 74HCT1G125 provides one non-inverting buffer/line driver with 3-state output. The 3-state output is controlled by the output enable input (pin  $\overline{\text{OE}}$ ). A HIGH level at pin  $\overline{\text{OE}}$  causes the output to assume a high-impedance OFF-state.

The bus driver output currents are equal compared to the 74HC125 and 74HCT125.

## 2. Features

- Wide supply voltage range from 2.0 V to 6.0 V
- Symmetrical output impedance
- High noise immunity
- Low power consumption
- Balanced propagation delays
- ESD protection:
  - ◆ HBM EIA/JESD22-A114-C exceeds 2000 V
  - ◆ MM EIA/JESD22-A115-A exceeds 200 V
- Very small 5 pins packages
- Specified from  $-40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$  and  $-40\text{ }^{\circ}\text{C}$  to  $+125\text{ }^{\circ}\text{C}$

## 3. Quick reference data

**Table 1:** Quick reference data

$GND = 0\text{ V}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $t_r = t_f \leq 6.0\text{ ns}$ .

| Symbol                   | Parameter                        | Conditions                                   | Min                 | Typ | Max | Unit |
|--------------------------|----------------------------------|----------------------------------------------|---------------------|-----|-----|------|
| <b>74HC1G125</b>         |                                  |                                              |                     |     |     |      |
| $t_{PHL}$ ,<br>$t_{PLH}$ | propagation delay A to Y         | $V_{CC} = 5\text{ V}$ ; $C_L = 15\text{ pF}$ | -                   | 9   | -   | ns   |
| $C_i$                    | input capacitance                |                                              | -                   | 1.5 | -   | pF   |
| $C_{PD}$                 | power dissipation<br>capacitance | $V_I = GND$ to $V_{CC}$                      | <a href="#">1</a> - | 30  | -   | pF   |

**PHILIPS**

Table 1: Quick reference data ...continued

GND = 0 V;  $T_{amb} = 25^{\circ}\text{C}$ ;  $t_r = t_f \leq 6.0\text{ ns}$ .

| Symbol                   | Parameter                        | Conditions                                   | Min | Typ | Max | Unit |
|--------------------------|----------------------------------|----------------------------------------------|-----|-----|-----|------|
| <b>74HCT1G125</b>        |                                  |                                              |     |     |     |      |
| $t_{PHL}$ ,<br>$t_{PLH}$ | propagation delay A to Y         | $V_{CC} = 5\text{ V}$ ; $C_L = 15\text{ pF}$ | -   | 10  | -   | ns   |
| $C_i$                    | input capacitance                |                                              | -   | 1.5 | -   | pF   |
| $C_{PD}$                 | power dissipation<br>capacitance | $V_I = \text{GND to } V_{CC} - 1.5\text{ V}$ | [1] | 27  | -   | pF   |

[1]  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu\text{W}$ ). $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$  where: $f_i$  = input frequency in MHz; $f_o$  = output frequency in MHz; $C_L$  = output load capacitance in pF; $V_{CC}$  = supply voltage in V;

N = number of inputs switching;

 $\Sigma(C_L \times V_{CC}^2 \times f_o)$  = sum of the outputs.

## 4. Ordering information

Table 2: Ordering information


| Type number       | Package                                         |        |                                                                           |          |
|-------------------|-------------------------------------------------|--------|---------------------------------------------------------------------------|----------|
|                   | Temperature range                               | Name   | Description                                                               | Version  |
| <b>74HC1G125</b>  |                                                 |        |                                                                           |          |
| 74HC1G125GW       | $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ | TSSOP5 | plastic thin shrink small outline package; 5 leads;<br>body width 1.25 mm | SOT353-1 |
| 74HC1G125GV       | $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ | SC-74A | plastic surface mounted package; 5 leads                                  | SOT753   |
| <b>74HCT1G125</b> |                                                 |        |                                                                           |          |
| 74HCT1G125GW      | $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ | TSSOP5 | plastic thin shrink small outline package; 5 leads;<br>body width 1.25 mm | SOT353-1 |
| 74HCT1G125GV      | $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ | SC-74A | plastic surface mounted package; 5 leads                                  | SOT753   |

## 5. Marking

Table 3: Marking


| Type number  | Marking code |
|--------------|--------------|
| 74HC1G125GW  | HM           |
| 74HC1G125GV  | H25          |
| 74HCT1G125GW | TM           |
| 74HCT1G125GV | T25          |

6. Functional diagram

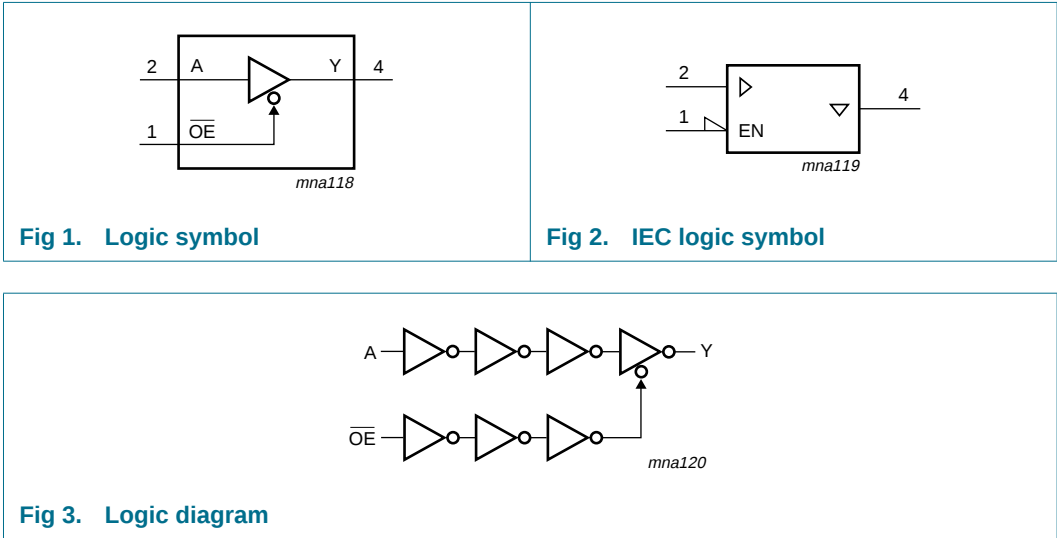

7. Pinning information

7.1 Pinning

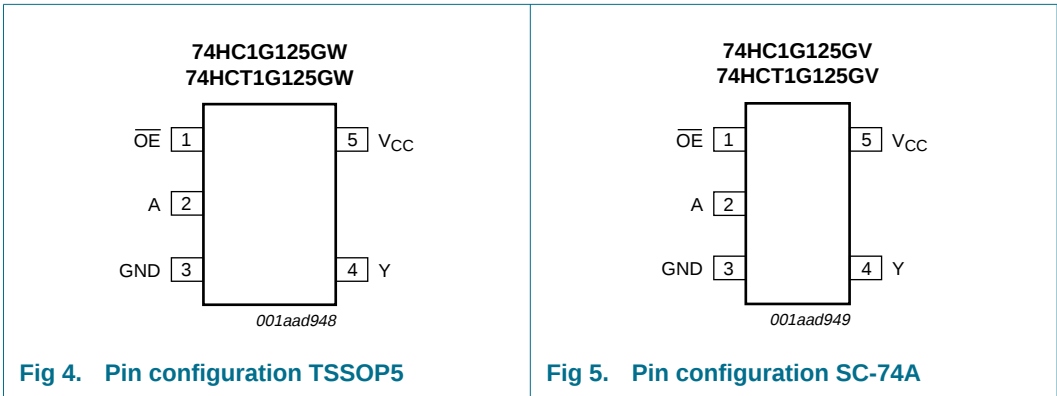

7.2 Pin description

| Table 4: Pin description |     |                                  |
|--------------------------|-----|----------------------------------|
| Symbol                   | Pin | Description                      |
| $\overline{\text{OE}}$   | 1   | output enable input (active LOW) |
| A                        | 2   | data input                       |
| GND                      | 3   | ground (0 V)                     |
| Y                        | 4   | data output                      |
| V <sub>CC</sub>          | 5   | supply voltage                   |

## 8. Functional description

### 8.1 Function table

Table 5: Function table <sup>[1]</sup>

| Control | Input | Output |
|---------|-------|--------|
| OE      | A     | Y      |
| L       | L     | L      |
| L       | H     | H      |
| H       | X     | Z      |

[1] H = HIGH voltage level;  
L = LOW voltage level;  
X = don't care;  
Z = high-impedance OFF-state.

## 9. Limiting values

Table 6: Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

| Symbol           | Parameter                | Conditions                                                             | Min              | Max  | Unit |
|------------------|--------------------------|------------------------------------------------------------------------|------------------|------|------|
| V <sub>CC</sub>  | supply voltage           |                                                                        | −0.5             | +7.0 | V    |
| I <sub>IK</sub>  | input clamping current   | V <sub>I</sub> < −0.5 V or V <sub>I</sub> > V <sub>CC</sub> + 0.5 V    | <sup>[1]</sup> - | ±20  | mA   |
| I <sub>OK</sub>  | output clamping current  | V <sub>O</sub> < −0.5 V or<br>V <sub>O</sub> > V <sub>CC</sub> + 0.5 V | <sup>[1]</sup> - | ±20  | mA   |
| I <sub>O</sub>   | output current           | V <sub>O</sub> = −0.5 V to (V <sub>CC</sub> + 0.5 V)                   | <sup>[1]</sup> - | ±35  | mA   |
| I <sub>CC</sub>  | quiescent supply current |                                                                        | -                | 70   | mA   |
| I <sub>GND</sub> | ground current           |                                                                        | -                | −70  | mA   |
| T <sub>stg</sub> | storage temperature      |                                                                        | −65              | +150 | °C   |
| P <sub>tot</sub> | total power dissipation  | T <sub>amb</sub> = −40 °C to +125 °C                                   | <sup>[2]</sup> - | 200  | mW   |

[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.  
[2] Above 55 °C the value of P<sub>tot</sub> derates linearly with 2.5 mW/K.

## 10. Recommended operating conditions

Table 7: Recommended operating conditions

| Symbol            | Parameter                 | Conditions              | Min | Typ | Max      | Unit |
|-------------------|---------------------------|-------------------------|-----|-----|----------|------|
| <b>74HC1G125</b>  |                           |                         |     |     |          |      |
| $V_{CC}$          | supply voltage            |                         | 2.0 | 5.0 | 6.0      | V    |
| $V_I$             | input voltage             |                         | 0   | -   | $V_{CC}$ | V    |
| $V_O$             | output voltage            |                         | 0   | -   | $V_{CC}$ | V    |
| $T_{amb}$         | ambient temperature       |                         | -40 | +25 | +125     | °C   |
| $t_r, t_f$        | input rise and fall times | $V_{CC} = 2.0\text{ V}$ | -   | -   | 1000     | ns   |
|                   |                           | $V_{CC} = 4.5\text{ V}$ | -   | -   | 500      | ns   |
|                   |                           | $V_{CC} = 6.0\text{ V}$ | -   | -   | 400      | ns   |
| <b>74HCT1G125</b> |                           |                         |     |     |          |      |
| $V_{CC}$          | supply voltage            |                         | 4.5 | 5.0 | 5.5      | V    |
| $V_I$             | input voltage             |                         | 0   | -   | $V_{CC}$ | V    |
| $V_O$             | output voltage            |                         | 0   | -   | $V_{CC}$ | V    |
| $T_{amb}$         | ambient temperature       |                         | -40 | +25 | +125     | °C   |
| $t_r, t_f$        | input rise and fall times | $V_{CC} = 4.5\text{ V}$ | -   | -   | 500      | ns   |

## 11. Static characteristics

Table 8: Static characteristics 74HC1G125

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                                                         | Parameter                 | Conditions                                            | Min  | Typ  | Max  | Unit |
|----------------------------------------------------------------|---------------------------|-------------------------------------------------------|------|------|------|------|
| $T_{amb} = -40\text{ °C to }+85\text{ °C}$ <a href="#">[1]</a> |                           |                                                       |      |      |      |      |
| $V_{IH}$                                                       | HIGH-state input voltage  | $V_{CC} = 2.0\text{ V}$                               | 1.5  | 1.2  | -    | V    |
|                                                                |                           | $V_{CC} = 4.5\text{ V}$                               | 3.15 | 2.4  | -    | V    |
|                                                                |                           | $V_{CC} = 6.0\text{ V}$                               | 4.2  | 3.2  | -    | V    |
| $V_{IL}$                                                       | LOW-state input voltage   | $V_{CC} = 2.0\text{ V}$                               | -    | 0.8  | 0.5  | V    |
|                                                                |                           | $V_{CC} = 4.5\text{ V}$                               | -    | 2.1  | 1.35 | V    |
|                                                                |                           | $V_{CC} = 6.0\text{ V}$                               | -    | 2.8  | 1.8  | V    |
| $V_{OH}$                                                       | HIGH-state output voltage | $V_I = V_{IH}$ or $V_{IL}$                            |      |      |      |      |
|                                                                |                           | $I_O = -20\text{ }\mu\text{A}; V_{CC} = 2.0\text{ V}$ | 1.9  | 2.0  | -    | V    |
|                                                                |                           | $I_O = -20\text{ }\mu\text{A}; V_{CC} = 4.5\text{ V}$ | 4.4  | 4.5  | -    | V    |
|                                                                |                           | $I_O = -20\text{ }\mu\text{A}; V_{CC} = 6.0\text{ V}$ | 5.9  | 6.0  | -    | V    |
|                                                                |                           | $I_O = -6.0\text{ mA}; V_{CC} = 4.5\text{ V}$         | 3.84 | 4.32 | -    | V    |
|                                                                |                           | $I_O = -7.8\text{ mA}; V_{CC} = 6.0\text{ V}$         | 5.34 | 5.81 | -    | V    |
| $V_{OL}$                                                       | LOW-state output voltage  | $V_I = V_{IH}$ or $V_{IL}$                            |      |      |      |      |
|                                                                |                           | $I_O = 20\text{ }\mu\text{A}; V_{CC} = 2.0\text{ V}$  | -    | 0    | 0.1  | V    |
|                                                                |                           | $I_O = 20\text{ }\mu\text{A}; V_{CC} = 4.5\text{ V}$  | -    | 0    | 0.1  | V    |
|                                                                |                           | $I_O = 20\text{ }\mu\text{A}; V_{CC} = 6.0\text{ V}$  | -    | 0    | 0.1  | V    |
|                                                                |                           | $I_O = 6.0\text{ mA}; V_{CC} = 4.5\text{ V}$          | -    | 0.15 | 0.33 | V    |
|                                                                |                           | $I_O = 7.8\text{ mA}; V_{CC} = 6.0\text{ V}$          | -    | 0.16 | 0.33 | V    |

**Table 8:** Static characteristics 74HC1G125 ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                                                       | Parameter                 | Conditions                                                              | Min  | Typ | Max  | Unit    |
|--------------------------------------------------------------|---------------------------|-------------------------------------------------------------------------|------|-----|------|---------|
| $I_{LI}$                                                     | input leakage current     | $V_I = V_{CC}$ or GND; $V_{CC} = 6.0$ V                                 | -    | -   | 1.0  | $\mu$ A |
| $I_{OZ}$                                                     | OFF-state output current  | $V_I = V_{IH}$ or $V_{IL}$ ; $V_O = V_{CC}$ or GND;<br>$V_{CC} = 6.0$ V | -    | -   | 5    | $\mu$ A |
| $I_{CC}$                                                     | quiescent supply current  | $V_I = V_{CC}$ or GND; $I_O = 0$ A;<br>$V_{CC} = 6.0$ V                 | -    | -   | 10   | $\mu$ A |
| $C_i$                                                        | input capacitance         |                                                                         | -    | 1.5 | -    | pF      |
| <b><math>T_{amb} = -40</math> °C to <math>+125</math> °C</b> |                           |                                                                         |      |     |      |         |
| $V_{IH}$                                                     | HIGH-state input voltage  | $V_{CC} = 2.0$ V                                                        | 1.5  | -   | -    | V       |
|                                                              |                           | $V_{CC} = 4.5$ V                                                        | 3.15 | -   | -    | V       |
|                                                              |                           | $V_{CC} = 6.0$ V                                                        | 4.2  | -   | -    | V       |
| $V_{IL}$                                                     | LOW-state input voltage   | $V_{CC} = 2.0$ V                                                        | -    | -   | 0.5  | V       |
|                                                              |                           | $V_{CC} = 4.5$ V                                                        | -    | -   | 1.35 | V       |
|                                                              |                           | $V_{CC} = 6.0$ V                                                        | -    | -   | 1.8  | V       |
| $V_{OH}$                                                     | HIGH-state output voltage | $V_I = V_{IH}$ or $V_{IL}$                                              |      |     |      |         |
|                                                              |                           | $I_O = -20$ $\mu$ A; $V_{CC} = 2.0$ V                                   | 1.9  | -   | -    | V       |
|                                                              |                           | $I_O = -20$ $\mu$ A; $V_{CC} = 4.5$ V                                   | 4.4  | -   | -    | V       |
|                                                              |                           | $I_O = -20$ $\mu$ A; $V_{CC} = 6.0$ V                                   | 5.9  | -   | -    | V       |
|                                                              |                           | $I_O = -6.0$ mA; $V_{CC} = 4.5$ V                                       | 3.7  | -   | -    | V       |
|                                                              |                           | $I_O = -7.8$ mA; $V_{CC} = 6.0$ V                                       | 5.2  | -   | -    | V       |
| $V_{OL}$                                                     | LOW-state output voltage  | $V_I = V_{IH}$ or $V_{IL}$                                              |      |     |      |         |
|                                                              |                           | $I_O = 20$ $\mu$ A; $V_{CC} = 2.0$ V                                    | -    | -   | 0.1  | V       |
|                                                              |                           | $I_O = 20$ $\mu$ A; $V_{CC} = 4.5$ V                                    | -    | -   | 0.1  | V       |
|                                                              |                           | $I_O = 20$ $\mu$ A; $V_{CC} = 6.0$ V                                    | -    | -   | 0.1  | V       |
|                                                              |                           | $I_O = 6.0$ mA; $V_{CC} = 4.5$ V                                        | -    | -   | 0.4  | V       |
|                                                              |                           | $I_O = 7.8$ mA; $V_{CC} = 6.0$ V                                        | -    | -   | 0.4  | V       |
| $I_{LI}$                                                     | input leakage current     | $V_I = V_{CC}$ or GND; $V_{CC} = 6.0$ V                                 | -    | -   | 1.0  | $\mu$ A |
| $I_{OZ}$                                                     | OFF-state output current  | $V_I = V_{IH}$ or $V_{IL}$ ; $V_O = V_{CC}$ or GND;<br>$V_{CC} = 6.0$ V | -    | -   | 10   | $\mu$ A |
| $I_{CC}$                                                     | quiescent supply current  | $V_I = V_{CC}$ or GND; $I_O = 0$ A;<br>$V_{CC} = 6.0$ V                 | -    | -   | 20   | $\mu$ A |

[1] All typical values are measured at  $T_{amb} = 25$  °C.

**Table 9: Static characteristics 74HCT1G125**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                                        | Parameter                           | Conditions                                                                                                             | Min  | Typ  | Max  | Unit |
|-----------------------------------------------|-------------------------------------|------------------------------------------------------------------------------------------------------------------------|------|------|------|------|
| <b>T<sub>amb</sub> = -40 °C to +85 °C [1]</b> |                                     |                                                                                                                        |      |      |      |      |
| V <sub>IH</sub>                               | HIGH-state input voltage            | V <sub>CC</sub> = 4.5 V to 5.5 V                                                                                       | 2.0  | 1.6  | -    | V    |
| V <sub>IL</sub>                               | LOW-state input voltage             | V <sub>CC</sub> = 4.5 V to 5.5 V                                                                                       | -    | 1.2  | 0.8  | V    |
| V <sub>OH</sub>                               | HIGH-state output voltage           | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; V <sub>CC</sub> = 4.5 V                                          |      |      |      |      |
|                                               |                                     | I <sub>O</sub> = -20 µA                                                                                                | 4.4  | 4.5  | -    | V    |
|                                               |                                     | I <sub>O</sub> = -6.0 mA                                                                                               | 3.84 | 4.32 | -    | V    |
| V <sub>OL</sub>                               | LOW-state output voltage            | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; V <sub>CC</sub> = 4.5 V                                          |      |      |      |      |
|                                               |                                     | I <sub>O</sub> = 20 µA                                                                                                 | -    | 0    | 0.1  | V    |
|                                               |                                     | I <sub>O</sub> = 6.0 mA                                                                                                | -    | 0.16 | 0.33 | V    |
| I <sub>LI</sub>                               | input leakage current               | V <sub>I</sub> = V <sub>CC</sub> or GND; V <sub>CC</sub> = 5.5 V                                                       | -    | -    | 1.0  | µA   |
| I <sub>OZ</sub>                               | OFF-state output current            | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; V <sub>O</sub> = V <sub>CC</sub> or GND; V <sub>CC</sub> = 5.5 V | -    | -    | 5    | µA   |
| I <sub>CC</sub>                               | quiescent supply current            | V <sub>I</sub> = V <sub>CC</sub> or GND; I <sub>O</sub> = 0 A; V <sub>CC</sub> = 6.0 V                                 | -    | -    | 10   | µA   |
| ΔI <sub>CC</sub>                              | additional quiescent supply current | V <sub>I</sub> = V <sub>CC</sub> - 2.1 V; I <sub>O</sub> = 0 A; V <sub>CC</sub> = 4.5 V to 5.5 V                       | -    | -    | 500  | µA   |
| C <sub>i</sub>                                | input capacitance                   |                                                                                                                        | -    | 1.5  | -    | pF   |
| <b>T<sub>amb</sub> = -40 °C to +125 °C</b>    |                                     |                                                                                                                        |      |      |      |      |
| V <sub>IH</sub>                               | HIGH-state input voltage            | V <sub>CC</sub> = 4.5 V to 5.5 V                                                                                       | 2.0  | -    | -    | V    |
| V <sub>IL</sub>                               | LOW-state input voltage             | V <sub>CC</sub> = 4.5 V to 5.5 V                                                                                       | -    | -    | 0.8  | V    |
| V <sub>OH</sub>                               | HIGH-state output voltage           | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; V <sub>CC</sub> = 4.5 V                                          |      |      |      |      |
|                                               |                                     | I <sub>O</sub> = -20 µA                                                                                                | 4.4  | -    | -    | V    |
|                                               |                                     | I <sub>O</sub> = -6.0 mA                                                                                               | 3.7  | -    | -    | V    |
| V <sub>OL</sub>                               | LOW-state output voltage            | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; V <sub>CC</sub> = 4.5 V                                          |      |      |      |      |
|                                               |                                     | I <sub>O</sub> = 20 µA                                                                                                 | -    | -    | 0.1  | V    |
|                                               |                                     | I <sub>O</sub> = 6.0 mA                                                                                                | -    | -    | 0.4  | V    |
| I <sub>LI</sub>                               | input leakage current               | V <sub>I</sub> = V <sub>CC</sub> or GND; V <sub>CC</sub> = 5.5 V                                                       | -    | -    | 1.0  | µA   |
| I <sub>OZ</sub>                               | OFF-state output current            | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; V <sub>O</sub> = V <sub>CC</sub> or GND; V <sub>CC</sub> = 5.5 V | -    | -    | 10   | µA   |
| I <sub>CC</sub>                               | quiescent supply current            | V <sub>I</sub> = V <sub>CC</sub> or GND; I <sub>O</sub> = 0 A; V <sub>CC</sub> = 6.0 V                                 | -    | -    | 20   | µA   |
| ΔI <sub>CC</sub>                              | additional quiescent supply current | V <sub>I</sub> = V <sub>CC</sub> - 2.1 V; I <sub>O</sub> = 0 A; V <sub>CC</sub> = 4.5 V to 5.5 V                       | -    | -    | 850  | µA   |

[1] All typical values are measured at T<sub>amb</sub> = 25 °C.

## 12. Dynamic characteristics

**Table 10: Dynamic characteristics 74HC1G125**

Voltages are referenced to GND (ground = 0 V);  $C_L = 50$  pF unless otherwise specified; for test circuit see [Figure 8](#)

| Symbol                                                           | Parameter                              | Conditions                                      | Min | Typ | Max | Unit |
|------------------------------------------------------------------|----------------------------------------|-------------------------------------------------|-----|-----|-----|------|
| <b><math>T_{amb} = -40\text{ °C to }+85\text{ °C}</math> [1]</b> |                                        |                                                 |     |     |     |      |
| $t_{PHL}$ ,<br>$t_{PLH}$                                         | propagation delay A to Y               | see <a href="#">Figure 6</a>                    |     |     |     |      |
|                                                                  |                                        | $V_{CC} = 2.0\text{ V}$                         | -   | 24  | 125 | ns   |
|                                                                  |                                        | $V_{CC} = 4.5\text{ V}$                         | -   | 10  | 25  | ns   |
|                                                                  |                                        | $V_{CC} = 5\text{ V}$ ;<br>$C_L = 15\text{ pF}$ | -   | 9   | -   | ns   |
|                                                                  |                                        | $V_{CC} = 6.0\text{ V}$                         | -   | 8   | 21  | ns   |
| $t_{PZH}$ ,<br>$t_{PZL}$                                         | 3-state output enable time<br>OE to Y  | see <a href="#">Figure 7</a>                    |     |     |     |      |
|                                                                  |                                        | $V_{CC} = 2.0\text{ V}$                         | -   | 19  | 155 | ns   |
|                                                                  |                                        | $V_{CC} = 4.5\text{ V}$                         | -   | 9   | 31  | ns   |
|                                                                  |                                        | $V_{CC} = 6.0\text{ V}$                         | -   | 7   | 26  | ns   |
| $t_{PHZ}$ ,<br>$t_{PLZ}$                                         | 3-state output disable time<br>OE to Y | see <a href="#">Figure 7</a>                    |     |     |     |      |
|                                                                  |                                        | $V_{CC} = 2.0\text{ V}$                         | -   | 18  | 155 | ns   |
|                                                                  |                                        | $V_{CC} = 4.5\text{ V}$                         | -   | 12  | 31  | ns   |
|                                                                  |                                        | $V_{CC} = 6.0\text{ V}$                         | -   | 11  | 26  | ns   |
| $C_{PD}$                                                         | power dissipation<br>capacitance       | $V_I = \text{GND to } V_{CC}$                   | [2] | -   | 30  | pF   |
| <b><math>T_{amb} = -40\text{ °C to }+125\text{ °C}</math></b>    |                                        |                                                 |     |     |     |      |
| $t_{PHL}$ ,<br>$t_{PLH}$                                         | propagation delay A to Y               | see <a href="#">Figure 6</a>                    |     |     |     |      |
|                                                                  |                                        | $V_{CC} = 2.0\text{ V}$                         | -   | -   | 150 | ns   |
|                                                                  |                                        | $V_{CC} = 4.5\text{ V}$                         | -   | -   | 30  | ns   |
|                                                                  |                                        | $V_{CC} = 6.0\text{ V}$                         | -   | -   | 26  | ns   |
| $t_{PZH}$ ,<br>$t_{PZL}$                                         | 3-state output enable time<br>OE to Y  | see <a href="#">Figure 7</a>                    |     |     |     |      |
|                                                                  |                                        | $V_{CC} = 2.0\text{ V}$                         | -   | -   | 190 | ns   |
|                                                                  |                                        | $V_{CC} = 4.5\text{ V}$                         | -   | -   | 38  | ns   |
|                                                                  |                                        | $V_{CC} = 6.0\text{ V}$                         | -   | -   | 32  | ns   |
| $t_{PHZ}$ ,<br>$t_{PLZ}$                                         | 3-state output disable time<br>OE to Y | see <a href="#">Figure 7</a>                    |     |     |     |      |
|                                                                  |                                        | $V_{CC} = 2.0\text{ V}$                         | -   | -   | 190 | ns   |
|                                                                  |                                        | $V_{CC} = 4.5\text{ V}$                         | -   | -   | 38  | ns   |
|                                                                  |                                        | $V_{CC} = 6.0\text{ V}$                         | -   | -   | 32  | ns   |

[1] All typical values are measured at  $T_{amb} = 25\text{ °C}$ .

[2]  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu\text{W}$ ).

$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$  where:

$f_i$  = input frequency in MHz;

$f_o$  = output frequency in MHz;

$C_L$  = output load capacitance in pF;

$V_{CC}$  = supply voltage in V;

$N$  = number of inputs switching;

$\Sigma(C_L \times V_{CC}^2 \times f_o)$  = sum of the outputs.

**Table 11: Dynamic characteristics 74HCT1G125**

Voltages are referenced to GND (ground = 0 V);  $C_L = 50$  pF unless otherwise specified; for test circuit see [Figure 8](#)

| Symbol                                                                                       | Parameter                                           | Conditions                                             | Min | Typ | Max | Unit |
|----------------------------------------------------------------------------------------------|-----------------------------------------------------|--------------------------------------------------------|-----|-----|-----|------|
| <b><math>T_{amb} = -40\text{ }^{\circ}\text{C to }+85\text{ }^{\circ}\text{C}</math> [1]</b> |                                                     |                                                        |     |     |     |      |
| $t_{PHL}$ ,<br>$t_{PLH}$                                                                     | propagation delay A to Y                            | see <a href="#">Figure 6</a>                           |     |     |     |      |
|                                                                                              |                                                     | $V_{CC} = 4.5\text{ V}$                                | -   | 11  | 30  | ns   |
|                                                                                              |                                                     | $V_{CC} = 5\text{ V}; C_L = 15\text{ pF}$              | -   | 10  | -   | ns   |
| $t_{PZH}$ ,<br>$t_{PZL}$                                                                     | 3-state output enable time<br>$\overline{OE}$ to Y  | $V_{CC} = 4.5\text{ V}$ ; see <a href="#">Figure 7</a> | -   | 10  | 35  | ns   |
| $t_{PHZ}$ ,<br>$t_{PLZ}$                                                                     | 3-state output disable time<br>$\overline{OE}$ to Y | $V_{CC} = 4.5\text{ V}$ ; see <a href="#">Figure 7</a> | -   | 11  | 31  | ns   |
| $C_{PD}$                                                                                     | power dissipation<br>capacitance                    | $V_I = \text{GND to } V_{CC} - 1.5\text{ V}$           | [2] | -   | 27  | pF   |
| <b><math>T_{amb} = -40\text{ }^{\circ}\text{C to }+125\text{ }^{\circ}\text{C}</math></b>    |                                                     |                                                        |     |     |     |      |
| $t_{PHL}$ ,<br>$t_{PLH}$                                                                     | propagation delay A to Y                            | $V_{CC} = 4.5\text{ V}$ ; see <a href="#">Figure 6</a> | -   | -   | 36  | ns   |
| $t_{PZH}$ ,<br>$t_{PZL}$                                                                     | 3-state output enable time<br>$\overline{OE}$ to Y  | $V_{CC} = 4.5\text{ V}$ ; see <a href="#">Figure 7</a> | -   | -   | 42  | ns   |
| $t_{PHZ}$ ,<br>$t_{PLZ}$                                                                     | 3-state output disable time<br>$\overline{OE}$ to Y | $V_{CC} = 4.5\text{ V}$ ; see <a href="#">Figure 7</a> | -   | -   | 38  | ns   |

[1] All typical values are measured at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .

[2]  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu\text{W}$ ).

$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$  where:

$f_i$  = input frequency in MHz;

$f_o$  = output frequency in MHz;

$C_L$  = output load capacitance in pF;

$V_{CC}$  = supply voltage in V;

$N$  = number of inputs switching;

$\Sigma(C_L \times V_{CC}^2 \times f_o)$  = sum of the outputs.

13. Waveforms

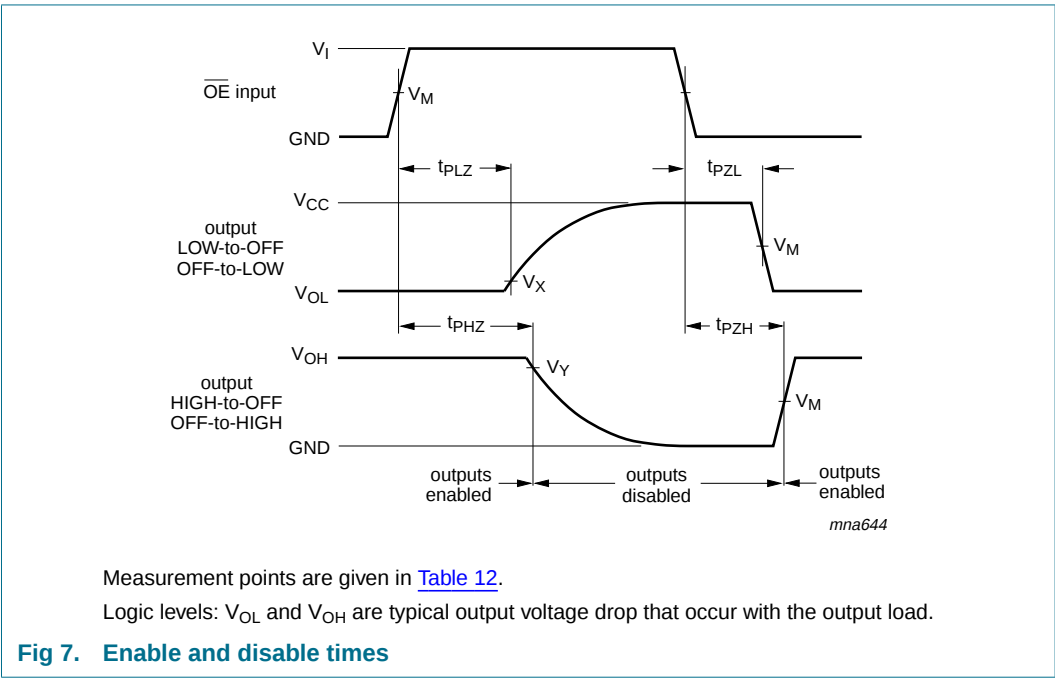
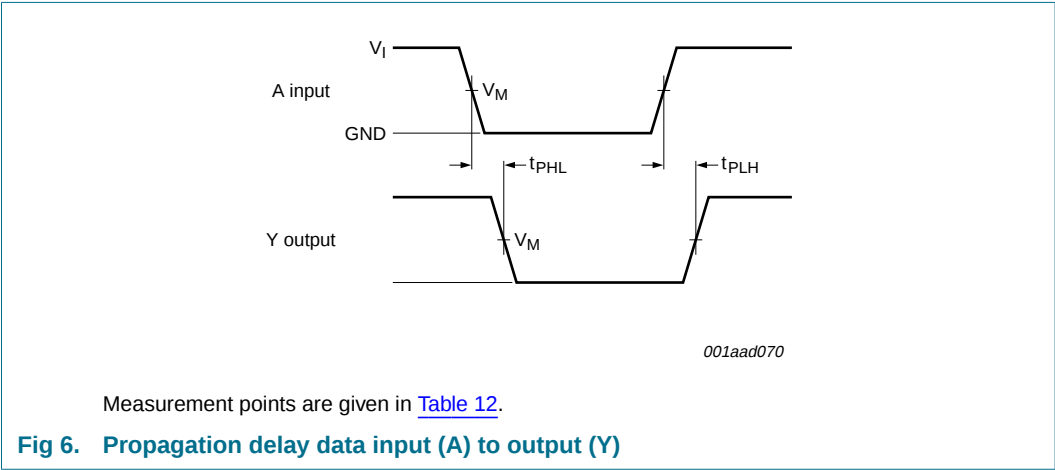


Table 12: Measurement points

| Type       | Input       | Output      |                         |                         |
|------------|-------------|-------------|-------------------------|-------------------------|
|            | $V_M$       | $V_M$       | $V_X$                   | $V_Y$                   |
| 74HC1G125  | $0.5V_{CC}$ | $0.5V_{CC}$ | $V_{OL} + 0.3\text{ V}$ | $V_{OH} - 0.3\text{ V}$ |
| 74HCT1G125 | 1.3 V       | 1.3 V       | $V_{OL} + 0.3\text{ V}$ | $V_{OH} - 0.3\text{ V}$ |


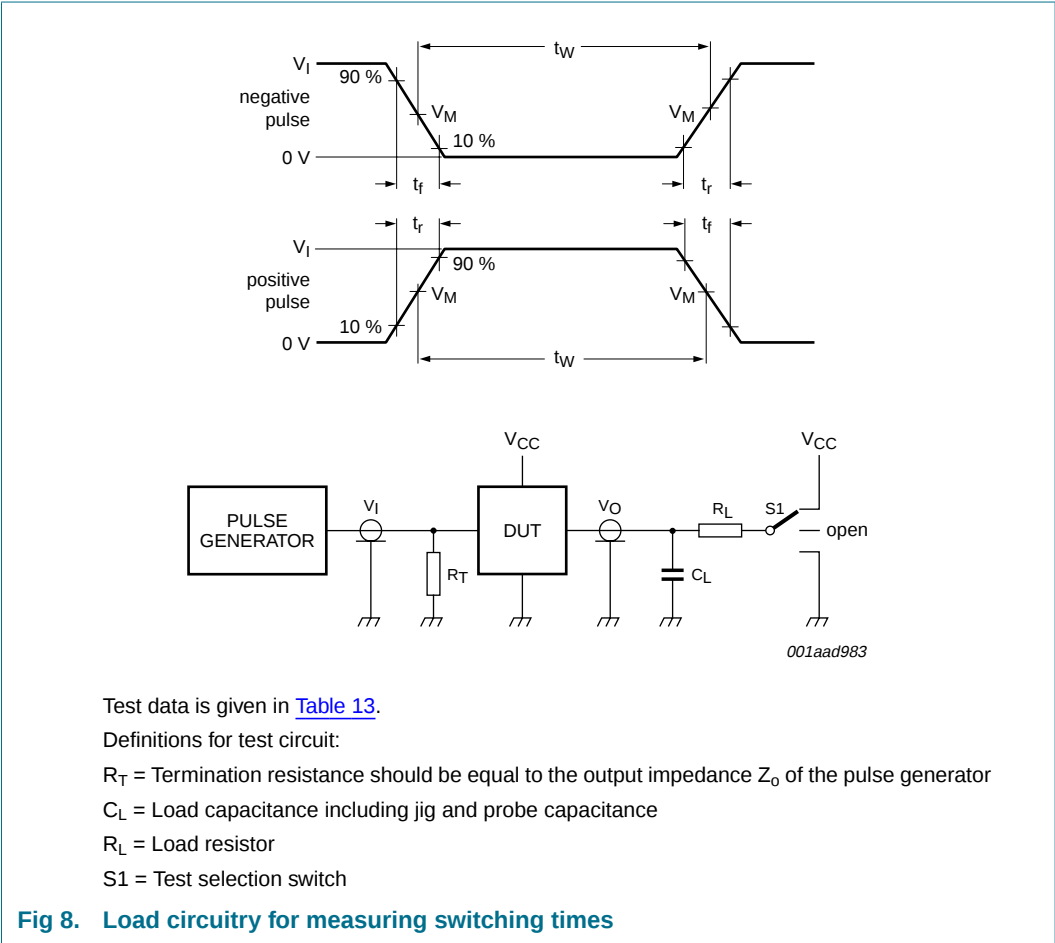


Fig 8. Load circuitry for measuring switching times

Table 13: Test data

| Type       | Input    |            | Load         |              | S1 position        |                    |                    |
|------------|----------|------------|--------------|--------------|--------------------|--------------------|--------------------|
|            | $V_I$    | $t_r, t_f$ | $C_L$        | $R_L$        | $t_{PLH}, t_{PHL}$ | $t_{PZH}, t_{PHZ}$ | $t_{PZL}, t_{PLZ}$ |
| 74HC1G125  | $V_{CC}$ | 6 ns       | 15 pF, 50 pF | 1 k $\Omega$ | open               | GND                | $V_{CC}$           |
| 74HCT1G125 | 3 V      | 6 ns       | 15 pF, 50 pF | 1 k $\Omega$ | open               | GND                | $V_{CC}$           |

14. Package outline

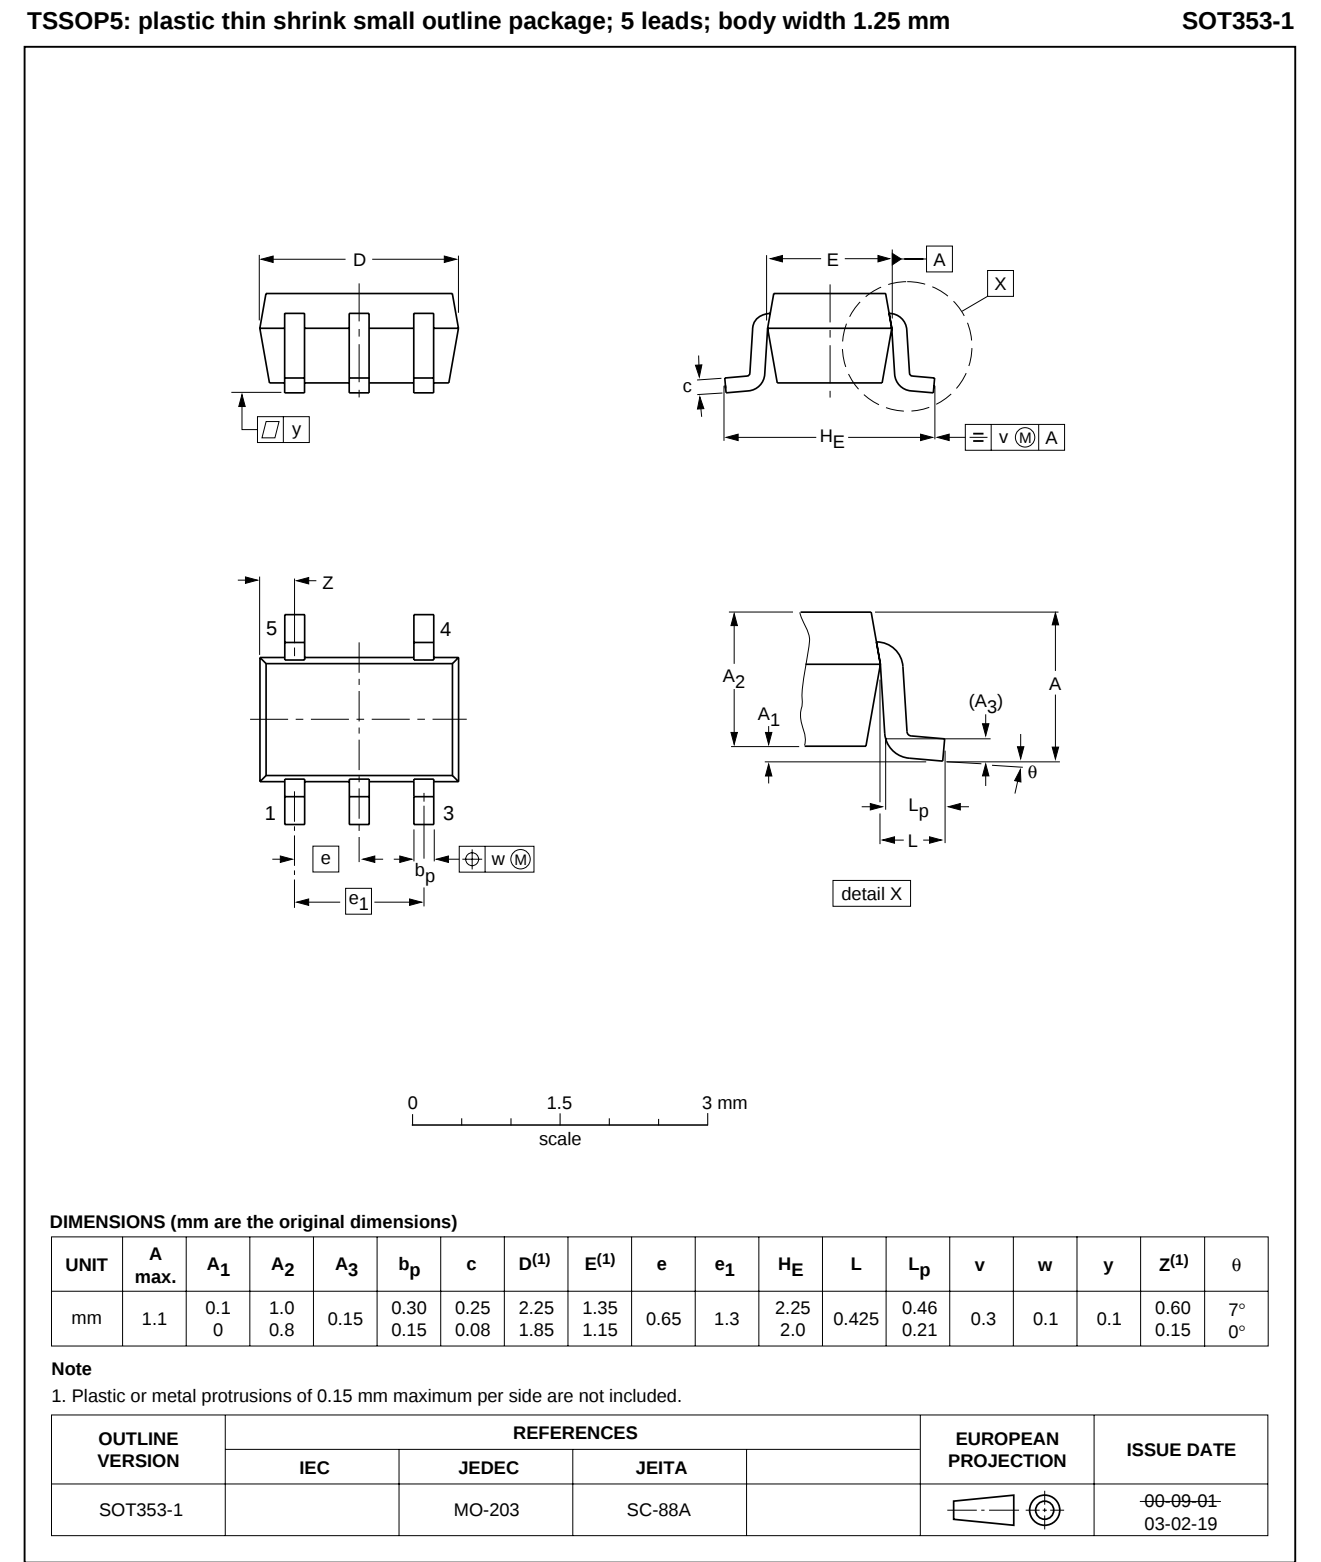

Plastic surface mounted package; 5 leads

SOT753

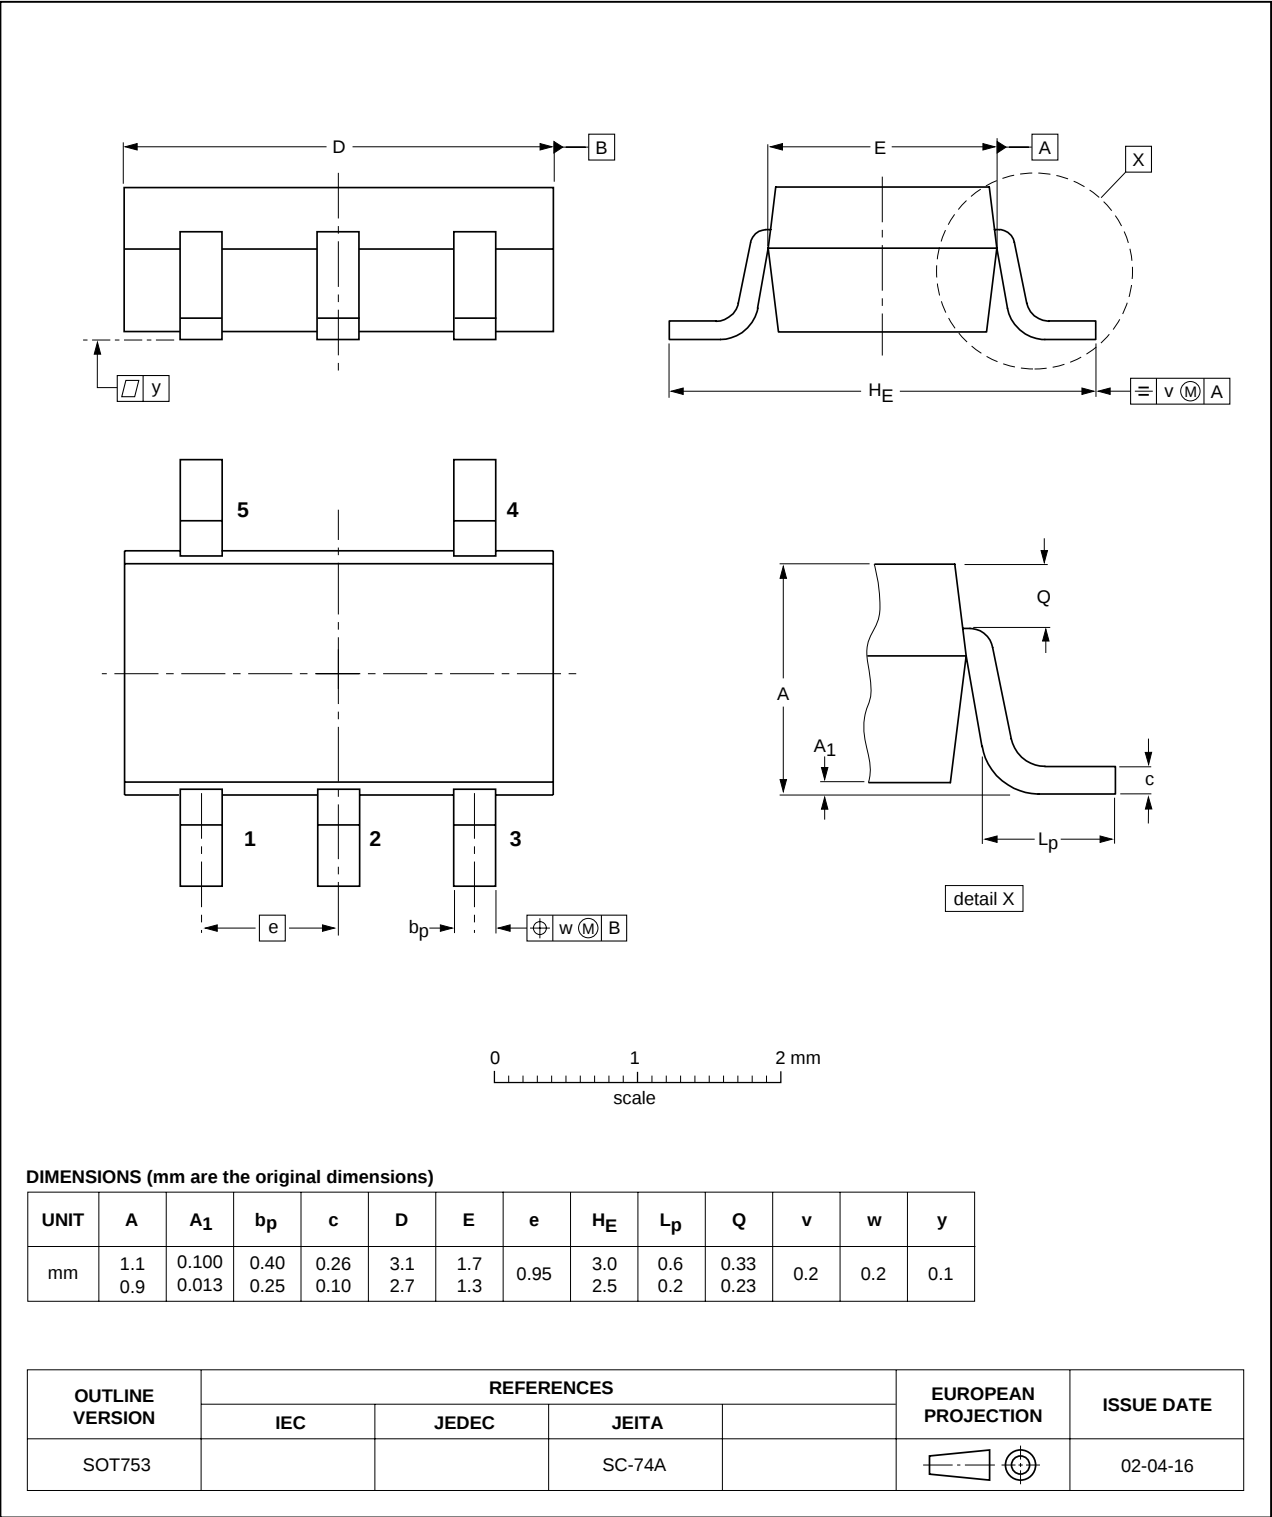


Fig 10. Package outline SOT753 (SC-74A)

## 15. Abbreviations

Table 14: Abbreviations

| Acronym | Description                             |
|---------|-----------------------------------------|
| CMOS    | Complementary Metal Oxide Semiconductor |
| ESD     | ElectroStatic Discharge                 |
| HBM     | Human Body Model                        |
| TTL     | Transistor-Transistor Logic             |
| MM      | Machine Model                           |

## 16. Revision history

Table 15: Revision history

| Document ID                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Release date | Data sheet status     | Change notice | Doc. number    | Supersedes      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------------------|---------------|----------------|-----------------|
| 74HC_HCT1G125_5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 20051223     | Product data sheet    | ECN05_085     | -              | 74HC_HCT1G125_4 |
| Modifications: <ul style="list-style-type: none"> <li>The format of this data sheet has been redesigned to comply with the new presentation and information standard of Philips Semiconductors.</li> <li>In <a href="#">Table 6 "Limiting values"</a> <ul style="list-style-type: none"> <li><math>I_O</math>: changed max value <math>\pm 12.5</math> into <math>\pm 35</math></li> <li><math>I_{CC}</math>: changed max value 25 into 70</li> <li><math>I_{GND}</math>: changed max value <math>-25</math> into <math>-70</math></li> </ul> </li> <li>In <a href="#">Table 8 "Static characteristics 74HC1G125"</a>; <math>T_{amb} = -40\text{ }^{\circ}\text{C}</math> to <math>+85\text{ }^{\circ}\text{C}</math> <ul style="list-style-type: none"> <li><math>V_{OH}</math>: changed condition <math>I_O = -2.0\text{ mA}</math> into <math>I_O = -6.0\text{ mA}</math> and min value from 4.13 into 3.84</li> <li><math>V_{OH}</math>: changed condition <math>I_O = -2.6\text{ mA}</math> into <math>I_O = -7.8\text{ mA}</math> and min value from 5.63 into 5.34</li> <li><math>V_{OL}</math>: changed condition <math>I_O = 2.0\text{ mA}</math> into <math>I_O = 6.0\text{ mA}</math></li> <li><math>V_{OL}</math>: changed condition <math>I_O = 2.6\text{ mA}</math> into <math>I_O = 7.8\text{ mA}</math></li> </ul> </li> <li>In <a href="#">Table 8 "Static characteristics 74HC1G125"</a>; <math>T_{amb} = -40\text{ }^{\circ}\text{C}</math> to <math>+125\text{ }^{\circ}\text{C}</math> <ul style="list-style-type: none"> <li><math>V_{OH}</math>: changed condition <math>I_O = -2.0\text{ mA}</math> into <math>I_O = -6.0\text{ mA}</math></li> <li><math>V_{OL}</math>: changed condition <math>I_O = 2.0\text{ mA}</math> into <math>I_O = 6.0\text{ mA}</math></li> </ul> </li> <li>In <a href="#">Table 9 "Static characteristics 74HCT1G125"</a>; <math>T_{amb} = -40\text{ }^{\circ}\text{C}</math> to <math>+85\text{ }^{\circ}\text{C}</math> <ul style="list-style-type: none"> <li><math>V_{OH}</math>: changed condition <math>I_O = -2.0\text{ mA}</math> into <math>I_O = -6.0\text{ mA}</math> and min value from 4.13 into 3.84</li> <li><math>V_{OL}</math>: changed condition <math>I_O = 2.0\text{ mA}</math> into <math>I_O = 6.0\text{ mA}</math> and typ value from 0.15 into 0.16</li> </ul> </li> <li>In <a href="#">Table 9 "Static characteristics 74HCT1G125"</a>; <math>T_{amb} = -40\text{ }^{\circ}\text{C}</math> to <math>+125\text{ }^{\circ}\text{C}</math> <ul style="list-style-type: none"> <li><math>V_{OH}</math>: changed condition <math>I_O = -2.0\text{ mA}</math> into <math>I_O = -6.0\text{ mA}</math></li> <li><math>V_{OL}</math>: changed condition <math>I_O = 2.0\text{ mA}</math> into <math>I_O = 6.0\text{ mA}</math></li> </ul> </li> </ul> |              |                       |               |                |                 |
| 74HC_HCT1G125_4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 20040727     | Product specification | -             | 9397 750 13725 | 74HC_HCT1G125_3 |
| 74HC_HCT1G125_3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 20020517     | Product specification | -             | 9397 750 09718 | 74HC_HCT1G125_2 |
| 74HC_HCT1G125_2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 20010302     | Product specification | -             | 9397 750 07966 | 74HC_HCT1G125_1 |
| 74HC_HCT1G125_1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 19981110     | Product specification | -             | 9397 750 03693 | -               |

## 17. Data sheet status

| Level | Data sheet status <sup>[1]</sup> | Product status <sup>[2] [3]</sup> | Definition                                                                                                                                                                                                                                                                                     |
|-------|----------------------------------|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I     | Objective data                   | Development                       | This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.                                                                                                    |
| II    | Preliminary data                 | Qualification                     | This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.             |
| III   | Product data                     | Production                        | This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). |

[1] Please consult the most recently issued data sheet before initiating or completing a design.

[2] The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.

[3] For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

## 18. Definitions

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

**Limiting values definition** — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes in the products - including circuits, standard cells, and/or software - described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

## 20. Trademarks

**Notice** — All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 19. Disclaimers

**Life support** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors

## 21. Contact information

For additional information, please visit: <http://www.semiconductors.philips.com>

For sales office addresses, send an email to: [sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com)

## 22. Contents

|     |                                            |    |
|-----|--------------------------------------------|----|
| 1   | General description . . . . .              | 1  |
| 2   | Features . . . . .                         | 1  |
| 3   | Quick reference data . . . . .             | 1  |
| 4   | Ordering information . . . . .             | 2  |
| 5   | Marking . . . . .                          | 2  |
| 6   | Functional diagram . . . . .               | 3  |
| 7   | Pinning information . . . . .              | 3  |
| 7.1 | Pinning . . . . .                          | 3  |
| 7.2 | Pin description . . . . .                  | 3  |
| 8   | Functional description . . . . .           | 4  |
| 8.1 | Function table . . . . .                   | 4  |
| 9   | Limiting values . . . . .                  | 4  |
| 10  | Recommended operating conditions . . . . . | 5  |
| 11  | Static characteristics . . . . .           | 5  |
| 12  | Dynamic characteristics . . . . .          | 8  |
| 13  | Waveforms . . . . .                        | 10 |
| 14  | Package outline . . . . .                  | 12 |
| 15  | Abbreviations . . . . .                    | 14 |
| 16  | Revision history . . . . .                 | 14 |
| 17  | Data sheet status . . . . .                | 15 |
| 18  | Definitions . . . . .                      | 15 |
| 19  | Disclaimers . . . . .                      | 15 |
| 20  | Trademarks . . . . .                       | 15 |
| 21  | Contact information . . . . .              | 15 |



© Koninklijke Philips Electronics N.V. 2005

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Date of release: 23 December 2005  
Document number: 74HC\_HCT1G125\_5

Published in The Netherlands