

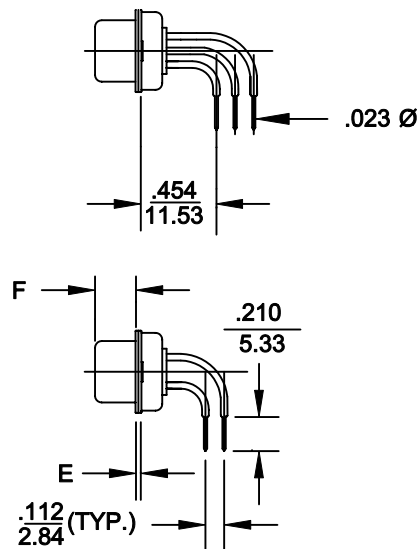



DESCRIPTION: R/A .454 FOOTPRINT MACHINED - MALE

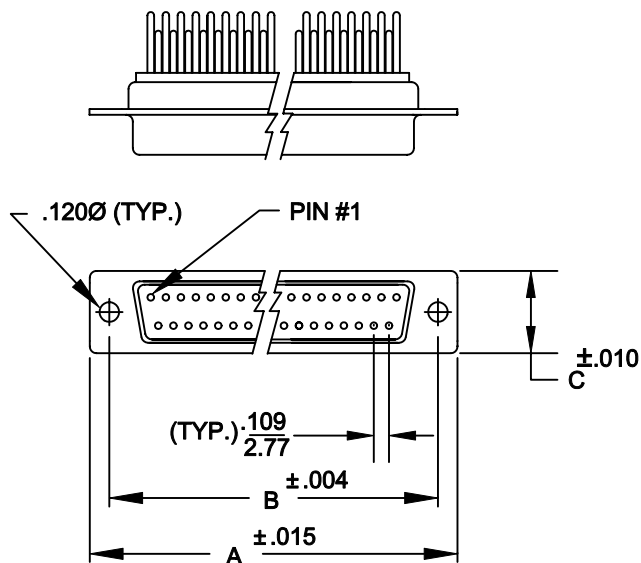

	A	B	C	E	F	G
9	1.213 30.81	.984 24.99	.494 12.55	.030 0.76	.235 5.97	0.436 11.07
15	1.541 39.14	1.312 33.32	.494 12.55	.030 0.76	.235 5.97	0.763 19.38
25	2.088 53.04	1.852 47.04	.494 12.55	.039 0.99	.230 5.84	1.308 33.22
37	2.729 69.32	2.500 63.50	.494 12.55	.039 0.99	.230 5.84	1.962 49.83
50	2.635 66.92	2.406 61.11	.605 15.37	.039 0.99	.230 5.84	1.744 44.32

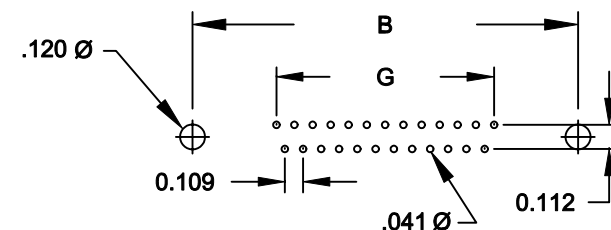

(9, 15, 25, 37 POSITIONS)

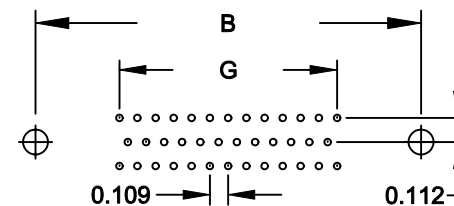

(50 POSITION)

SPECIFICATIONS:

MATERIALS:

SHELL: STEEL, TIN PLATED

INSULATOR: UL 94V-0 RATED BEIGE PBT

260°C PROCESS TEMP.

CONTACTS: BRASS

RoHS COMPLIANT

ELECTRICALS:

CURRENT RATING: 5 AMPS

CONTACT RESISTANCE: 15 mOHMS MAX

INSULTOR RESISTANCE: 1000 MOHMS MIN

VOLTAGE: 500V AC FOR 1 MINUTE

TEMPERATURE: -50°C TO +100°C

175-XXX-112RXX1

SERIES
POSITIONS
GENDER
1 = MALE
2 = FEMALE
TERMINATION
1 = PC MOUNT
SHELL PLATING
2 = TIN

HARDWARE OPTIONS
00 = NO HARDWARE
25 = LONG BRACKET WITH 4-40 SCREW
15 = LONG BRACKET WITH 4-40 SCREW LOCK

PLATING OPTIONS
1 = GOLD FLASH
2 = 30 MICRO-INCH GOLD



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
WAYNE ROBBINS

DATE:
9-16-05

CHECKED:

DATE:

SCALE:
1:1

SHEET
1 OF 1

REV
1


DWG NO.

175-XXX-112R001

NorComp

DESCRIPTION:

173/174 SERIES

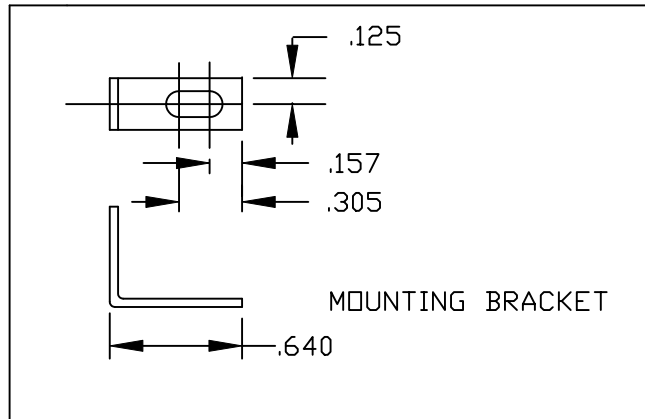

HARDWARE OPTIONS


REPLACE -XX IN LAST 3 DIGITS WITH OPTION CHOSEN

173/174 SERIES

14X = SHORT BRACKET & 4-40 FEMALE HEX SOCKET

24X = SHORT BRACKET & 4-40 SCREW

175/176 SERIES

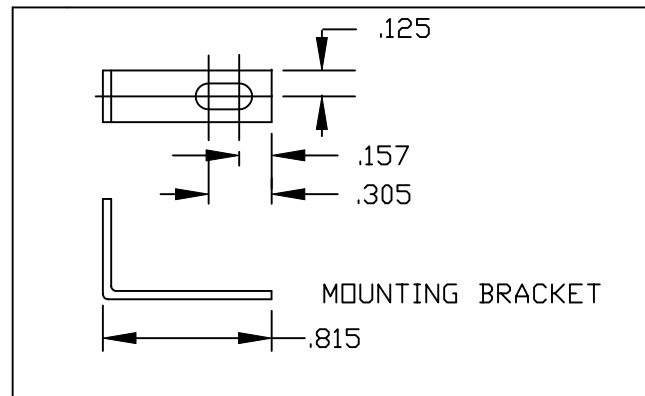

175/176 SERIES

15X = LONG BRACKET & 4-40 FEMALE HEX SOCKET

25X = LONG BRACKET & 4-40 SCREW

MATERIAL:
COLD ROLLED STEEL

PLATING:
CLEAR ZINC

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS		DATE: 2-20-02	
		CHECKED:		DATE:	
		SCALE:	SHEET 1 OF 1		REV 1
		DWG NO. R/A BRACKET OPTIONS FOR MACHINED CONTACTS			