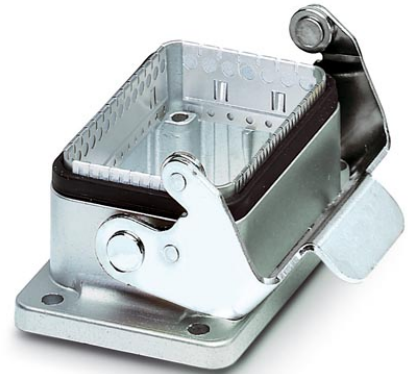


HC-B 6-AML-EMV

Order No.: 1642344

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1642344>

HEAVYCON panel mounting base B6, with single locking latch, EMC version. Not suitable for D series terminal adapters

Commercial data

GTIN (EAN)	4046356028417
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Weight/Piece	0.13138 KG
Catalog page information	Page 518 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
07/03/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data


General data

Note	For contact inserts HC-B6, BB10, DD24, M
Design	B6
Height	30.5 mm
Width	48 mm

Length	80 mm
Housing type	EMC housings
Locking type	With single locking latch
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 100 °C
Housing material	Aluminum, die-cast
Housing surface material	EMC coating, silver
Seal material	NBR, conductive
Material lock	Steel, galvanized
Length of the assembly cutout	48 mm
Width of the assembly cutout	35 mm
Assembly instructions	Cannot be used for HC-D... series terminal adapters.
Connection	If insulating powder coating is present on the control cabinet panel, it should be removed from the profile gasket area in order to ensure optimum shielding.


Diagrams/Drawings

Diagram

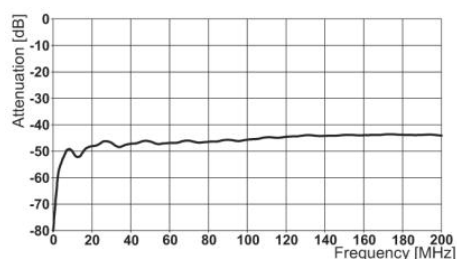

Shield attenuation

Dimensioned drawing

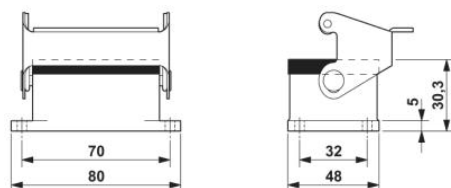

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;