

## Optical element - PSD-S OE LED RD - 2700107

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




LED permanent light element, 24 V AC/DC, red

### Your advantages

- ✓ Tool-free element changeover
- ✓ Can be freely combined
- ✓ High light and color intensity
- ✓ Minimum LED service life of 50,000 h
- ✓ Low power consumption
- ✓ IP65 degree of protection

### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 491082
GTIN	4046356491082

### Technical data

#### Dimensions

Diameter	70 mm
Height	65.5 mm

#### Ambient conditions

Ambient temperature (operation)	-30 °C ... 50 °C
Degree of protection	IP65, when installed or with cover

#### General

Material	Polycarbonate PC
Calotte color	red
Weight	58 g
Mounting position	any

# Optical element - PSD-S OE LED RD - 2700107

## Technical data

### General

Assembly instructions	Rubber seal pre-installed for each element
-----------------------	--

### Electrical data

Input voltage	24 V AC/DC
Maximum inrush current	max. 500 mA
Current consumption	max. 40 mA
Service life, electrical	max. 100,000 h
Operating time	100 %
Optical signal type	Permanent light

### Approvals / conformities

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
-------------------------------	---

### Standards and Regulations

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
-------------------------------	---


### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

# Optical element - PSD-S OE LED RD - 2700107

Dimensional drawing

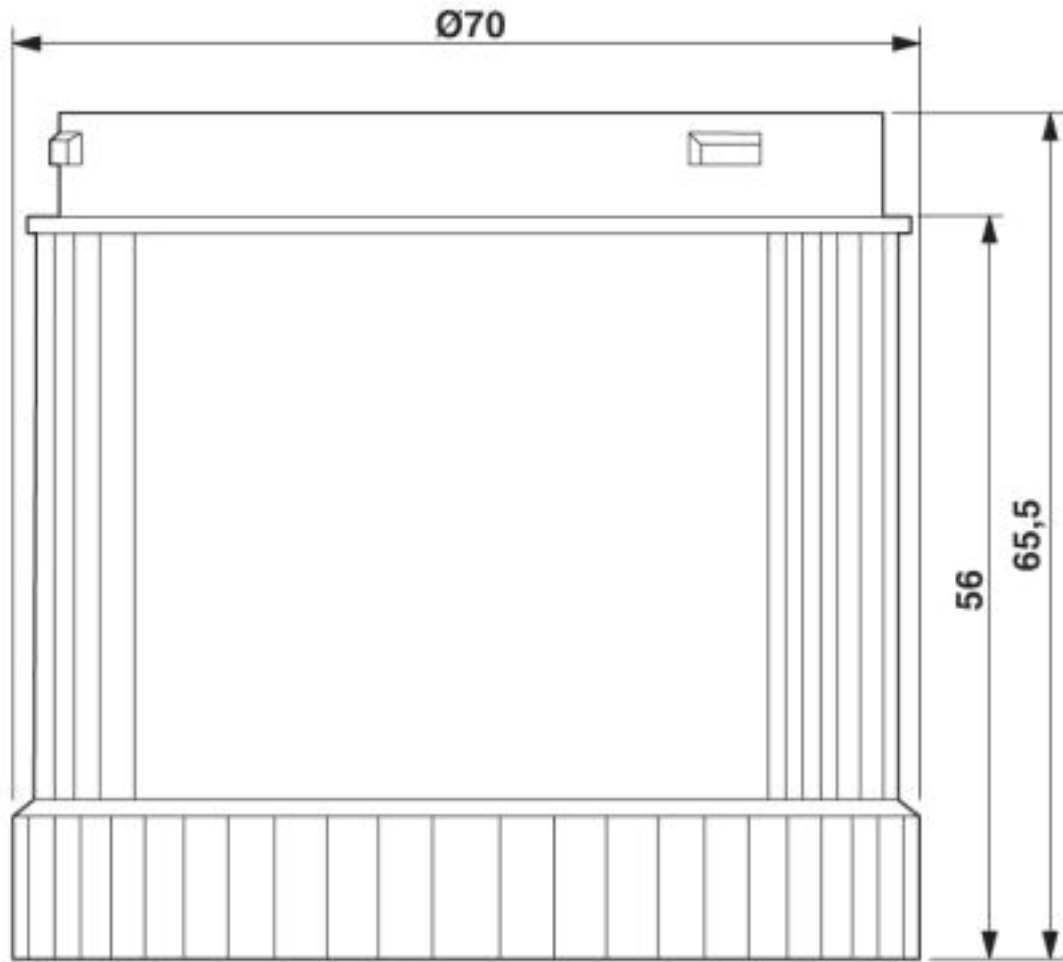

## Classifications

eCl@ss

eCl@ss 10.0.1	27371220
eCl@ss 4.0	27143200
eCl@ss 4.1	27143200
eCl@ss 5.0	27371200
eCl@ss 5.1	27371200
eCl@ss 6.0	27371200
eCl@ss 7.0	27371220
eCl@ss 8.0	27371220
eCl@ss 9.0	27371220

ETIM

ETIM 3.0	EC000232
ETIM 4.0	EC000232

# Optical element - PSD-S OE LED RD - 2700107

## Classifications

### ETIM

ETIM 5.0	EC000232
ETIM 6.0	EC000232
ETIM 7.0	EC000232

### UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	39121311
UNSPSC 12.01	39121311
UNSPSC 13.2	46171604
UNSPSC 18.0	46171604
UNSPSC 19.0	46171604
UNSPSC 20.0	46171604
UNSPSC 21.0	46171604

## Approvals

### Approvals

#### Approvals

UL Listed / cUL Listed / EAC / cULus Listed

#### Ex Approvals

### Approval details

UL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 123528
-----------	--	---	---------------

cUL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 123528
------------	--	---	---------------

EAC		RU *- DE.A*30.B.00237
-----	--	--------------------------

## Optical element - PSD-S OE LED RD - 2700107

### Approvals

cULus Listed



Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>