



## FFAF20U120DN

### Features

- High voltage and high reliability
- High speed switching
- Low forward voltage

### Applications

- General purpose
- Switching mode power supply
- Free-wheeling diode for motor application
- Power switching circuits

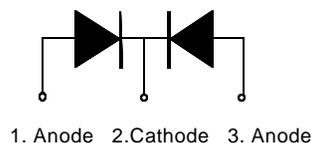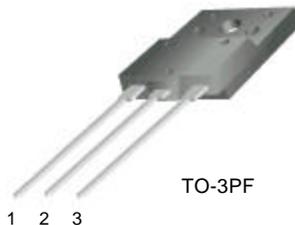

## ULTRA FAST RECOVERY POWER RECTIFIER

### Absolute Maximum Ratings (per diode) $T_C=25^\circ\text{C}$ unless otherwise noted

| Symbol         | Parameter   | Value        | Units            |
|----------------|---|--------------|------------------|
| $V_{RRM}$      | Peak Repetitive Reverse Voltage                                 | 1200         | V                |
| $I_{F(AV)}$    | Average Rectified Forward Current @ $T_C = 100^\circ\text{C}$   | 20           | A                |
| $I_{FSM}$      | Non-repetitive Peak Surge Current<br>60Hz Single Half-Sine Wave | 120          | A                |
| $T_J, T_{STG}$ | Operating Junction and Storage Temperature                      | - 65 to +150 | $^\circ\text{C}$ |

### Thermal Characteristics

| Symbol          | Parameter                                    | Value | Units              |
|-----------------|--|-------|--------------------|
| $R_{\theta JC}$ | Maximum Thermal Resistance, Junction to Case | 0.84  | $^\circ\text{C/W}$ |

### Electrical Characteristics (per diode) $T_C=25^\circ\text{C}$ unless otherwise noted

| Symbol     | Parameter   | Min.                      | Typ. | Max. | Units |               |
|------------|---|---------------------------|------|------|-------|---------------|
| $V_{FM}^*$ | Maximum Instantaneous Forward Voltage<br>$I_F = 20\text{A}$                                   | $T_C = 25^\circ\text{C}$  | -    | -    | 3.5   | V             |
|            |   | $T_C = 100^\circ\text{C}$ | -    | -    | 3.2   |               |
| $I_{RM}^*$ | Maximum Instantaneous Reverse Current<br>@ rated $V_R$  | $T_C = 25^\circ\text{C}$  | -    | -    | 20    | $\mu\text{A}$ |
|            |   | $T_C = 100^\circ\text{C}$ | -    | -    | 1.2   | mA            |
| $t_{rr}$   | Maximum Reverse Recovery Time   | -                         | -    | 120  | ns    |               |
| $I_{rr}$   | Maximum Reverse Recovery Current  | -                         | -    | 10   | A     |               |
| $Q_{rr}$   | Maximum Reverse Recovery Charge<br>( $I_F = 20\text{A}$ , $di/dt = 200\text{A}/\mu\text{s}$ ) | -                         | -    | 500  | nC    |               |
| $W_{AVL}$  | Avalanche Energy  | 1.0                       | -    | -    | mJ    |               |

\* Pulse Test: Pulse Width=300 $\mu\text{s}$ , Duty Cycle=2%

# Typical Characteristics

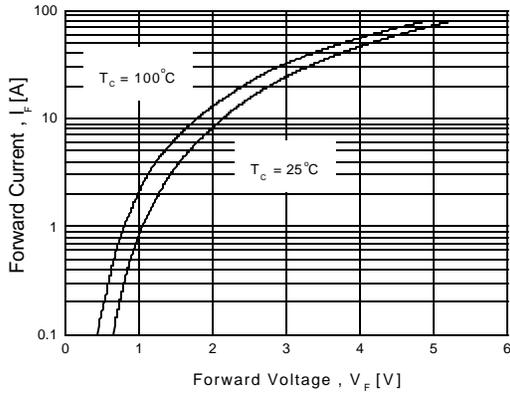


Figure 1. Typical Forward Voltage Drop vs. Forward Current

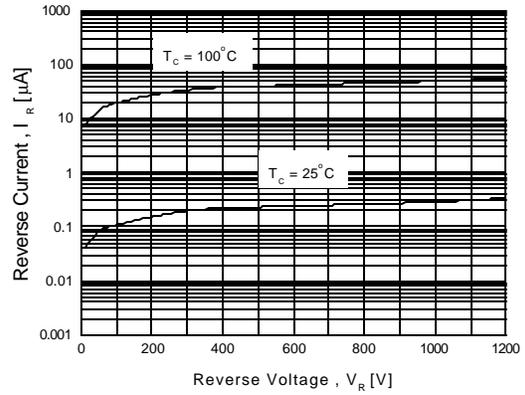


Figure 2. Typical Reverse Current vs. Reverse Voltage

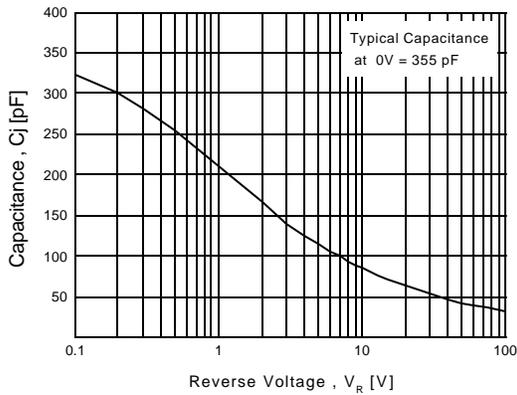


Figure 3. Typical Junction Capacitance

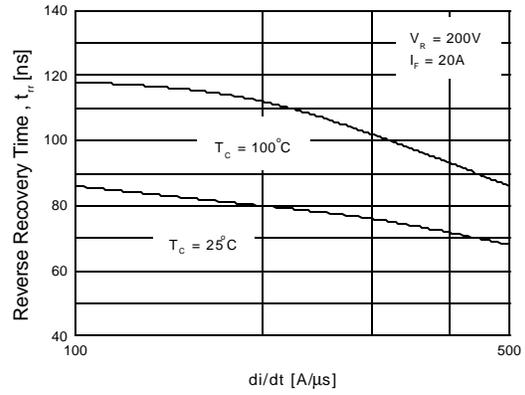


Figure 4. Typical Reverse Recovery Time vs. di/dt

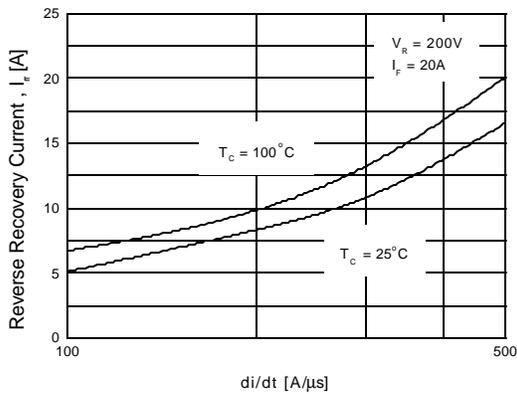


Figure 5. Typical Reverse Recovery Current vs. di/dt


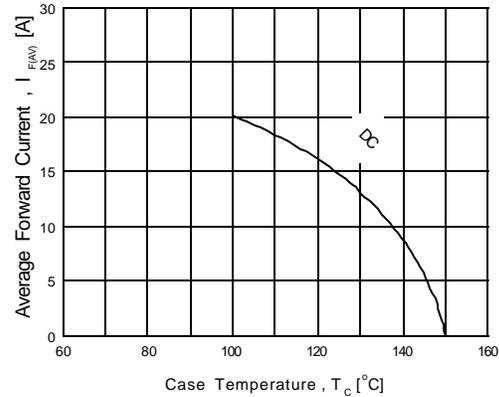


Figure 6. Forward Current Derating Curve

# Package Dimensions

## TO-3PF

FFAF20U120DN

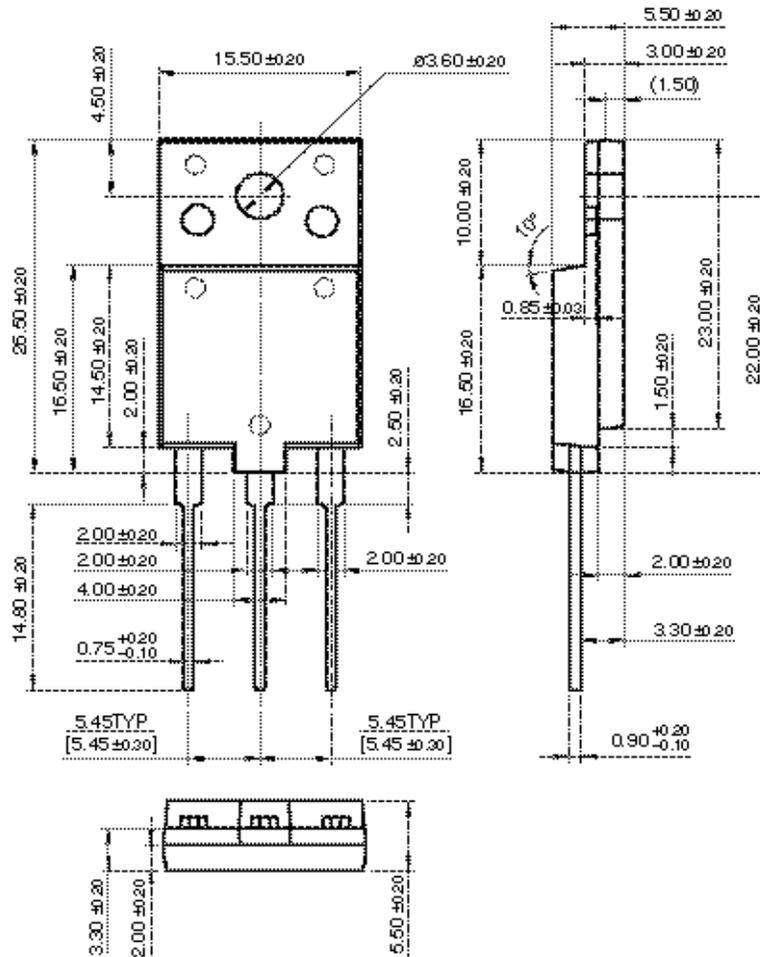

Dimensions in Millimeters

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

|                                  |                                 |                                 |                  |
|----------------------------------|---------------------------------|---------------------------------|------------------|
| ACE <sup>x</sup> <sup>™</sup>    | FAST <sup>r</sup> <sup>™</sup>  | QFET <sup>™</sup>               | VCX <sup>™</sup> |
| Bottomless <sup>™</sup>          | GlobalOptoisolator <sup>™</sup> | QS <sup>™</sup>                 |                  |
| CoolFET <sup>™</sup>             | GTO <sup>™</sup>                | QT Optoelectronics <sup>™</sup> |                  |
| CROSSVOLT <sup>™</sup>           | HiSeC <sup>™</sup>              | Quiet Series <sup>™</sup>       |                  |
| DOME <sup>™</sup>                | ISOPLANAR <sup>™</sup>          | SuperSOT <sup>™</sup> -3        |                  |
| E <sup>2</sup> CMOS <sup>™</sup> | MICROWIRE <sup>™</sup>          | SuperSOT <sup>™</sup> -6        |                  |
| EnSigna <sup>™</sup>             | OPTOLOGIC <sup>™</sup>          | SuperSOT <sup>™</sup> -8        |                  |
| FACT <sup>™</sup>                | OPTOPLANAR <sup>™</sup>         | SyncFET <sup>™</sup>            |                  |
| FACT Quiet Series <sup>™</sup>   | POP <sup>™</sup>                | TinyLogic <sup>™</sup>          |                  |
| FAST <sup>®</sup>                | PowerTrench <sup>®</sup>        | UHC <sup>™</sup>                |                  |

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition  |
|--------------------------|------------------------|---|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.  |
| Preliminary              | First Production       | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.   |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.   |

[find products](#)

[Home](#) >> [Find products](#) >>

[Products groups](#)

[Analog and Mixed](#)

[Signal](#)

[Discrete](#)

[Interface](#)

[Logic](#)

[Microcontrollers](#)

[Non-Volatile](#)

[Memory](#)

[Optoelectronics](#)

[Markets and](#)

[applications](#)

[New products](#)

[Product selection and](#)

[parametric search](#)

[Cross-reference](#)

[search](#)

FFAF20U120DN  
20A/1200V Ultra Fast Recovery Rectifier

Contents

[Features](#) | [Applications](#) | [Product status/pricing/packaging](#)

Features

- High Voltage and High Reliability
- High Speed Switching
- Low Forward Voltage

[back to top](#)

Applications

- General Purpose
- Switching Mode Power Supply
- Free Wheeling Diode for Motor Application
- Power Switching Circuit

[back to top](#)

Product status/pricing/packaging

| Product        | Product status  | Pricing* | Package type           | Leads | Packing method |
|----------------|-----------------|----------|------------------------|-------|----------------|
| FFAF20U120DNTU | Full Production | \$4.24   | <a href="#">TO-3PF</a> | 3     | RAIL           |

\* 1,000 piece Budgetary Pricing

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) | [Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

Related Links

[Request samples](#)

[Dotted line](#)

[How to order products](#)

[Dotted line](#)

[Product Change Notices](#)

[\(PCNs\)](#)

[Dotted line](#)

[Support](#)

[Dotted line](#)

[Distributor and field sales](#)

[representatives](#)

[Dotted line](#)

[Quality and reliability](#)

[Dotted line](#)

[Design tools](#)

Datasheet

[Download this](#)

[datasheet](#)



[e-mail this datasheet](#)



This page [Print version](#)