


(0,80 mm) .0315"

MEC8-DV SERIES

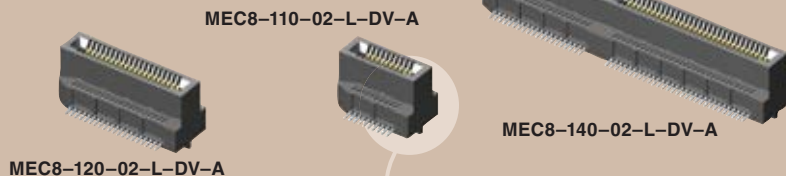

VERTICAL MICRO EDGE CARD SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?MEC8-DV

Insulator Material:

Black LCP

Contact Material:

Phosphor Bronze

Plating:

Au or Sn over

50µ" (1,27 µm) Ni

Operating Temp Range:

-55°C to +125°C

Insertion Depth:

(4,22 mm) .166" to

(5,66 mm) .223"

Current Rating:

1.8A per contact @ 30°C

Voltage Rating:

265 VAC

RoHS Compliant:

Yes

Processing:

Lead-Free Solderable:

Yes


SMT Lead Coplanarity:

(0,10 mm) .004" max (10-50)

(0,15 mm) .006" max (60-70)


Mates with:
(1,60 mm) .062"
thick cards

APPLICATIONS



Mates with (1,60 mm)
.062" thick card

Variety of
lead counts

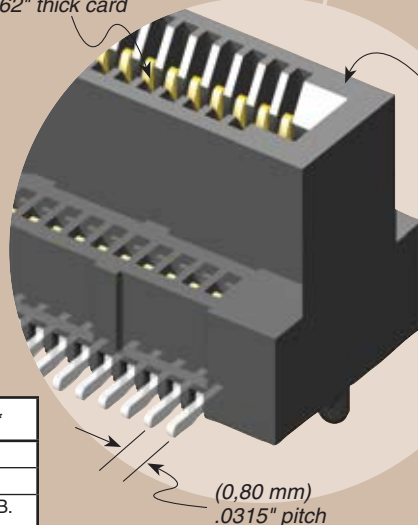

(0,80 mm)
.0315" pitch

MEC8-DV 8,65 mm Stack Height	Rated @ 3dB Insertion Loss*
Single-Ended Signaling	7.0 GHz / 14 Gbps
Differential Pair Signaling	7.0 GHz / 14 Gbps

*Performance data includes effects of a non-optimized PCB.
Complete test data available at www.samtec.com?MEC8-DV or contact sig@samtec.com

APPLICATION SPECIFIC OPTION

- 1 mm mating card thickness option
 - Locking clip (Manual placement required)
- Call Samtec.


ALSO AVAILABLE

Right angle and edge mount.
See www.samtec?MEC8-RA
or www.samtec?MEC8-EM

Note: While optimized for 50Ω applications, this connector with alternative signal/ground patterns may also perform well in certain 75Ω applications. Contact Samtec for further information.

Note: Some sizes, styles and options are non-standard, non-returnable.

MEC8	1	POSITIONS PER ROW	02	PLATING OPTION	DV	OTHER OPTION
		10, 20, 30, 40, 50, 60, 70		-L = 10µ" (0,25 µm) Gold on contact, Matte Tin on tail		-A = Alignment Pin -K = (5,50 mm) .217" DIA Polyimide Pick & Place Pad

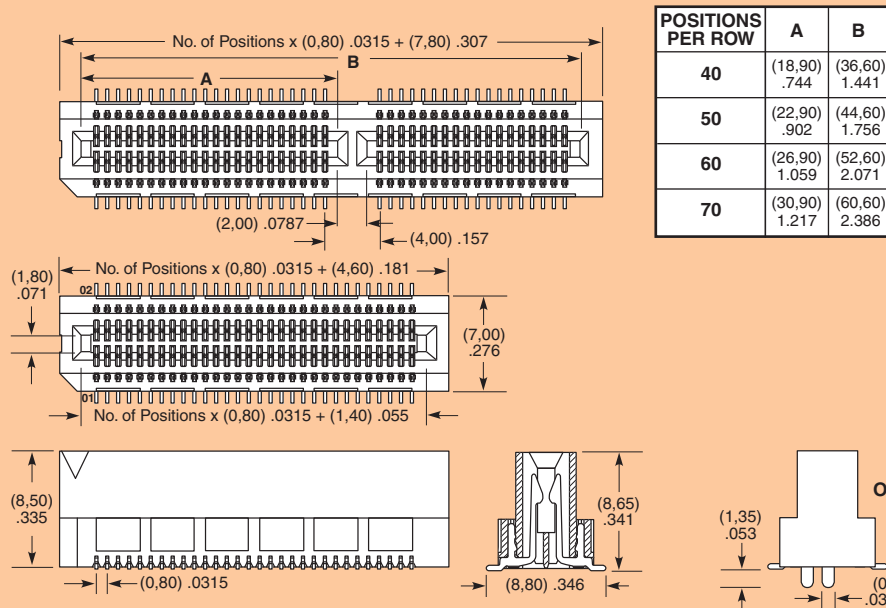

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
 SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
 SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
 SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683