


(1,00 mm) .03937"

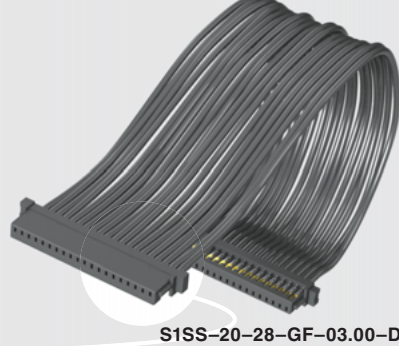

S1SST-20-28-GF-03.00-D

S1SS, S1SST SERIES

MICRO CABLE ASSEMBLY

SPECIFICATIONS

For complete specifications see www.samtec.com?S1SS or www.samtec.com?S1SST

Insulator Material:

Nylon

Contact Material:

Phosphor Bronze

Plating:

Au or Sn over 50µ" (1,27 µm) Ni

Operating Temp Range:

-10°C to +85°C

Current Rating:

3.3 A per pin

(1 pin powered)

Voltage Rating:

250 VAC/353 VDC


Wire:

28 or 30 AWG

RoHS Compliant:

Yes

Mates with:
T1M

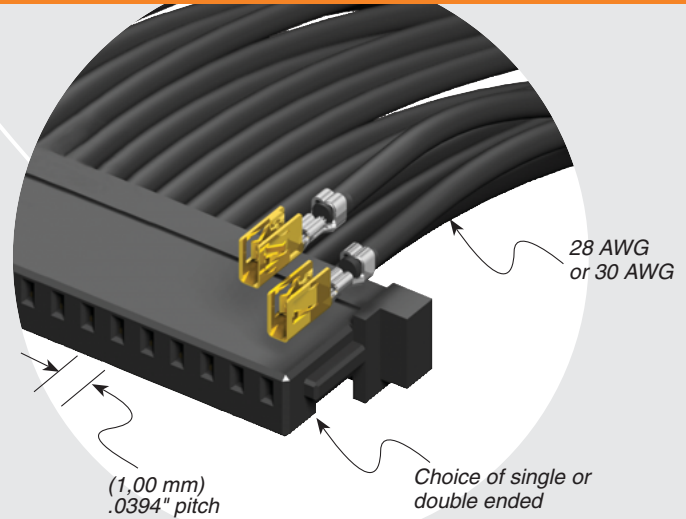

*DuPont™ Teflon® is a registered trademark of the E.I. du Pont de Nemours and Company or its affiliates.

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



ALSO AVAILABLE (MOQ Required)

- Other sizes
 - Color coded cable (*Teflon® N/A)
- Contact Samtec.

Note: Teflon® cable is intended for crimp only. Contact Samtec for solderable cable applications.

Note: Some lengths, styles and options are non-standard, non-returnable.

TYPE STRIP	NO. OF POSITIONS	WIRE GAUGE	PLATING OPTION	ASSEMBLED LENGTH	END OPTION	END 2 OPTION
S1SS = Single Row PVC Cable S1SST = Single Row *Teflon® Cable (28 AWG only)	-02, -03, -05, -07, -10 -15, -20 (Standard Sizes)	-30 = 30 AWG -28 = 28 AWG	-GF = 3µ" (0,07 µm) Gold, 50µ" (1,27 µm) Ni on contact and tail -T = Tin	-"XX.XX" = Assembled Length in Inches (45,72 mm) 01.80" min.	-S = Single Ended -D = Double Ended	(Requires -D option) -NUS = No Latch, "N" up, straight -NDS = No Latch, "N" down, straight

