


3SBC1527A2 Product Details

SharePrint

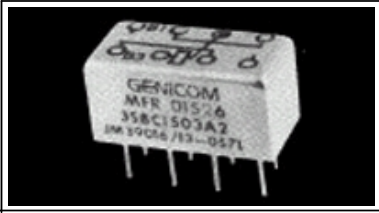

3SBC1527A2
(3 - 1617072 - 2)

TE Internal Number: 3 - 1617072 - 2

Active

Military/Aerospace High Performance Relays

[Not EU RoHS or ELV Compliant](#)

Product Highlights:

- ? 3SBC 1/5 -Size Relay Series
- ? Input Voltage = 26.5 VDC
- ? Contact Arrangement = 2 Form C, DPDT, 2 C/O
- ? Contact - Rated Current = 2 A
- ? Non Polarized, Monostable Coil - Magnetic System

[View all Features](#)

Quick Links

- ? [Check Pricing & Availability](#)
- ? [Search for Tooling](#)
- ? [Product Feature Selector](#)
- ? [Contact Us About This Product](#)

[Add to My Part List](#)

[Request Sample](#)

[Find Similar Products](#)

[Buy Product](#)

Documentation & Additional Information

Product Drawings:

- ? None Available

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? None Available

Instruction Sheets:

- ? None Available

CAD Files:

- ? None Available

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? [Series](#) = 3SBC 1/5 -Size Relay
- ? Termination Type = Solder Hook Terminals

Electrical Characteristics:

- ? Input Voltage (VDC) = 26.5
- ? Contact - Rated Current (A) = 2
- ? Coil Polarity Protection Diode = Without
- ? Transistor Driver = Without
- ? Coil Resistance (?) = 1350
- ? MOSFET Driver = Without
- ? Coil Power Measurement = Milliwatts
- ? Coil - Rated Power (mW) = 520
- ? Actuating System = DC
- ? Shock = 75 G's, 6ms
- ? Vibration = 30G's, 10 to 3000Hz

Contact Features:

- ? Mounting Options = Chassis Mount
- ? Enclosure Type = Hermetically Sealed

Configuration Features:

- ? [Contact Arrangement](#) = 2 Form C, DPDT, 2 C/O
- ? Coil - Magnetic System = Non Polarized, Monostable
- ? Coil Suppression Diode = Without

Industry Standards:

- ? Government/Industry Qualification = Yes
- ? Government/Industry Part Number = M39016/13 -066M
- ? [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- ? [Lead Free Solder Processes](#) = Not suitable for lead free processing
- ? Approved Standards = M39016 Qualified, M Level

Conditions for Usage:

- ? Temperature Range (°C) = -65 - +125

Other:

- ? Brand = CII

Corporate Information

Who We Are
Investors
News Room
Supplier Portal
Careers

Quick Links

Check Distributor Inventory
Cross Reference
Find Documents & Drawings
Product Compliance Support Center
Site Map

Customer Support

Email or Chat With Us
Find a Phone Number
Search Knowledge Base
Manage your Account

Keep Me Informed

Receive TE News, Events
& Technology Updates

Enter your email address

